

EFFECT OF GAP LENGTHS OF SPHERE-SPHERE ELECTRODES ON AIR
BREAKDOWN LEVEL UNDER LIGHTNING IMPULSE

AHMAD AZLAN BIN HAMZAH

A project report submitted in partial
fulfillment of the requirement for the award of the
Degree of Master of Electric Power

Faculty of Electrical and Electronics Engineering
Universiti Tun Hussein Onn Malaysia

JULY 2014

ACKNOWLEDGEMENT

This research project would not have been possible without the support of many people. The author wishes to express his gratitude to his supervisor, Dr Muhammad Saufi Bin Kamarudin who was abundantly helpful and offered invaluable assistance, support and guidance. Deepest gratitude is also due to Asistant Engineer Mr. Azizi whose knowledge and assistance this study would not have been successful. Special thanks also to all his graduate friends, especially group members; Suhaimi Bin Abdullah @ Abdul Rahman, Mohd Dasri Che Mok @ Adnan and Nik Aznan Abdul Hadi for sharing the literature and invaluable assistance. The author would also like to convey thanks to the Universiti Tun Hussein Onn for providing the laboratory and library facilities. The author wishes to express his love and gratitude to her beloved families; for their understanding & endless love, through the duration of his studies.



PERPUSTAKAAN TUNKU TUN AMINAH

ABSTRACT

Rapid growth of high voltage technology gives the opportunity to engineer to do a study on the environmental protection. Production high voltage power is due to natural conditions that could harm and damage the ecosystem of the human condition. In electrical power system, HV power equipment are mainly subjected with spark over voltage. These over voltage which may causes by the lighting strokes, switching action, Normally, the standard sphere gaps are widely used for protective device in such electrical power equipment. The sphere gaps are commonly used for measurements of peak values of high voltages and have been adopted any designing in HV equipment. This project is study about the effect of gap length of sphere-sphere electrodes on air breakdown level under lightning impulse. This project is started by experimental setup and producing standard impulse voltage. The lightning impulse produce should be meets the specifications required by BS EN 60060-1:2010. The standard characteristic of impulse voltage T_1/T_2 where T_1 is the front time while T_2 is time to half value also discussed. The procedure of the lab which implement also referred from Terco High Voltage Experiments. The method that will use in this project is Up and Down Method to obtain U_{50} . From this method, we can examine the average value of breakdown of an impulse lightning voltage is applied to the electrodes. The project also discusses about the electric field density while the impulse voltage is loaded into the sphere to sphere electrode and separated it at desire air gap by using the FEMM software. The characteristic either uniform or non-uniform results also present in this project. Level of insulations at desire gaps between the sphere's gap also obtain after complete this project.

ABSTRAK

Kepesatan teknologi voltan tinggi memberi peluang kepada jurutera untuk melakukan kajian dalam sektor pelindungan persekitaran. Penghasilan voltan tinggi daripada alam semulajadi mendatangkan bahaya dan kerosakan kepada ekosistem kehidupan manusia. Dalam sistem kuasa elektrik, *HV* peralatan kuasa tertakluk kepada voltan percikan. Voltan percikan tersebut boleh disebabkan oleh kilat dan petir, aksi pensuisan. Pada kebiasaannya, jurang antara sfera dalam rekabentuk perkakasan elektrik digunakan secara meluas untuk perlindungan kepada perkakasan elektrik. Projek yang dijalankan adalah mengkaji kesan perubahan jarak antara sfera dalam persekitaran udara biasa di bawah tekanan voltan *impulse*. Projek ini dimulakan dengan penghasilan voltan *impulse*. Voltan *impulse* yang diperolehi sepatutnya mengikut spesifikasi BS EN 60060-1:2010. Voltan *impulse* yang diperolehi mempunyai T_1/T_2 di mana T_1 adalah masa hadapan manakala T_2 adalah masa ketika separuh. Prosedur makmal yang dilaksanakan berdasarkan Eksperimen *Terco High Voltage*. Semasa di makmal, langkah Naik dan Langkah Turun dijalankan untuk mendapatkan nilai voltan U_{50} . Projek juga membincangkan tentang kekuatan medan voltan apabila sfera sfera diberikan voltan *impulse* dan dijarakkan pada jarak yang hendak dikaji menggunakan perisian FEMM. Hasil dapatan data kemudian diproses kemudiannya ditentukan ciriannya samada seragam atau sebaliknya.

CONTENTS

TITLE	i
DECLARATION	ii
ACKNOWLEDGEMENT	iii
ABSTRACT	iv
ABSTRAK	v
CONTENT	vi
LIST OF TABLES	ix
LIST OF FIGURES	x
1 PROJECT OVERVIEW	1
1.1 Introduction	1
1.2 Problem Statement	1
1.3 Objective	2
2 LITERATURE REVIEW	3
2.1 Breakdown voltage	3
2.2 Flashover	3

2.3	Spark over voltage	4
2.3.1	Townsend theory	5
2.3.2	Paschen's Law	6
2.4	Marx Generator	7
2.5	Lightning in Malaysia	10
3	METHODOLOGY	11
3.1	Impulse Voltage	16
3.1.1	Tolerances	17
3.2	Test Setup U_{50}	17
3.2.1	Up and down method.	22
3.3	Drawing the electrode using FEMM software	24
4	RESULT ANALYSIS AND DISCUSSION	26
4.1	Result for 1cm's gap	27
4.1.1	Voltage Density for 1cm's gap	29
4.1.2	Electric field intensity $ E $ for 1cm's gap	30
4.2	Result for gap 1.5cm	31
4.2.1	Voltage Density for 1.5cm's gap	33
4.2.2	Electric field intensity $ E $ for 1.5cm's gap	34
4.3	Result for gap 2cm	35
4.3.1	Voltage Density for 2 cm's gap	37

4.3.2	Electric field intensity $ E $ for 2 cm's gap	38
4.4	Result for gap 2.5cm	39
4.4.1	Voltage Density for 2.5 cm's gap	41
4.4.2	Electric field intensity $ E $ for 2.5 cm's gap	42
4.5	Result for gap 3cm	43
4.5.1	Voltage Density for 3 cm's gap	45
4.5.2	Electric field intensity $ E $ for 3 cm's gap	46
4.6	Overall result	48
4.6.1	Analysis about U_{50} versus gap	48
4.6.2	Analysis about E_{\max} versus gap	49
4.6.3	Analysis about Field Utilization (FUF) Factor versus Gap	50
4.6.4	Analysis about U_{50} versus Field Utilization Factor (FUF)	51
4.6.5	Analysis about E_{\max} versus Field Utilization Factor (FUF)	52
5	CONCLUSION AND RECOMMENDATION	53
5.1	Conclusion	53
5.2	Recommendation	55
	REFERENCES	56

LIST OF TABLES

3.1	Table of list equipment	12
4.1	Up and down method for 1cm's gap	28
4.2	Up and down method for 1.5cm's gap	32
4.3	Up and down method for 2 cm's gap	36
4.4	Up and down method for 2.5 cm's gap	40
4.5	Up and down method for 3 cm's gap	44
4.6	Overall result from breakdown test and FEMM simulation	48

LIST OF FIGURES

2.1	Electrode configuration for flashover	4
2.2	Spark over voltage occurred	5
2.3	Visualation of a Townsend Avalanche	6
2.4	Paschen Law Curve Characteristic	7
2.5	Marx Generator connection during charging and discharge	9
2.6	Marx Generator	9
2.7	World Isokeraunic Map	10
3.1	Impulse Voltage Generator test setup	11
3.2	Block Diagram	13
3.3	Single Stage Test Set-Up	13
3.4	Silicon Rectifier	14
3.5	Charging Rectifier	14
3.6	Control Desk	15
3.7	Sphere gap	16
3.8	Switching impulse voltage	17
3.9	Grounding the component using earthing rod	18
3.10	Gap measuring	19
3.11	Control Desktop interface	20

3.12	Sphere to sphere cant touched each other	21
3.13	Measuring gap between sphere to produce Impulse Voltage	21
3.14	Flow Chart Up and Down Method	23
3.15	Diameter of sphere's electrode	24
3.16	Using actual diameter sphere to simulate	25
4.1	Impulse voltage applied during the U_{50} test.	27
4.2	Breakdown and non-breakdown for 1cm's gap	27
4.3	Voltage Density for 1cm's gap	29
4.4	Graph for voltage density for point a to b 1cm sphere gap configuration	29
4.5	Field Intensity for 1cm's gap	30
4.6	Graph for electric field intensity $ E $ at point a to b for 1cm sphere gap electrodes	31
4.7	Breakdown and non-breakdown for 1.5 cm's gap	31
4.8	Voltage Density for 1.5cm's gap	33
4.9	Graph for voltage density for point a to b 1.5cm sphere gap configuration	33
4.10	Field Intensity for 1.5 cm's gap	34
4.11	Graph for electric field intensity $ E $ at point a to b for 1.5cm sphere gap electrodes	35
4.12	Breakdown and non-breakdown for 2 cm's gap	35
4.13	Voltage Density for 2cm's gap	37
4.14	Graph for voltage density for point a to b 2cm sphere gap configuration	38
4.15	Field Intensity for 2 cm's g	38

4.16	Graph for electric field intensity $ E $ at point a to b for 2cm sphere gap electrodes	39
4.17	Breakdown and non-breakdown for 2.5 cm's gap	39
4.18	Voltage Density for 2.5cm's gap	41
4.19	Graph for voltage density for point a to b 2.5 cm sphere gap configuration	42
4.20	Field Intensity for 2.5 cm's gap	42
4.21	Graph for electric field intensity $ E $ at point a to b for 2.5 cm sphere gap electrodes	43
4.22	Breakdown and non-breakdown for 3 cm's gap	43
4.23	Voltage Density for 3cm's gap	45
4.24	Graph for voltage density for point a to b 3 cm sphere gap configuration	46
4.25	Field Intensity for 3 cm's gap	47
4.26	Graph for electric field intensity $ E $ at point a to b for 3cm sphere gap electrodes	48
4.27	U_{50} versus gap	49
4.28	E_{\max} versus gap	50
4.29	Field Utilization Factor versus gap	51
4.30	U_{50} versus FUF	51
4.31	E_{\max} versus FUF	52

CHAPTER 1

PROJECT OVERVIEW

1.1 Introduction

Nowadays, the study of high voltage rapidly expanding in tandem with technology. Various studies and new findings about the high voltage that can offer security to users has attracted a lot more to learn about the science of high voltage. When discussing about the high voltage, the impression is the danger of high voltage electric shock that enables including fatal accidents, spark causing injury to humans and can also cause damage to electrical equipment. This project is discusses one of the important phenomenon in high voltage is breakdown voltage.

Breakdown voltage, sometimes also called dielectric strength or striking voltage, is the quantity of electrical force required to transform the electrical properties of an object. Most commonly, it is used with respect to insulators[1]. Many researches work has been done to understand the fundamental characteristics of the electrical breakdown. Breakdown voltage is a phenomenon where the quantity of an electrical force is required to transform the electrical properties of an object.

1.2 Problem Statement

In electrical power system, high voltage (HV) power equipment are mainly subjected breakdown voltage. These over voltage which may causes by the lightning strokes,

switching action, determine the safe clearance required for proper insulation level. In order to avoid these problems in high voltage power equipment, sphere-sphere electrodes on air breakdown level under lightning impulse is study and will present in this report. The characteristic of the breakdown voltage obtained from the study is used as an improvement in the design of any electrical equipment. For example in designing of transmission line, height is analyze accurately and to avoid voltage breakdown.

1.3 Objective

The main objective of the project is:

1. To study about the performance characteristic of impulse voltage.
2. To setup impulse voltage circuit.
3. To arrange sphere to sphere electrodes in breakdown voltage test.
4. To get U_{50} value using the Up and Down Method.
5. To simulate and analysis the air breakdown voltage for different gap between sphere to sphere using FEMM software
6. To analyze the effect of voltage applied and gap size against a field intensity produce by sphere-sphere electrodes.

CHAPTER 2

LITERATURE REVIEW

2.1 Breakdown voltage

Electrical breakdown or dielectric breakdown refers to a rapid reduction in the resistance of an electrical insulator when the voltage applied across it exceeds the breakdown voltage[2]. This results in a portion of the insulator becoming electrically conductive. Electrical breakdown may be a momentary event (as in an electrostatic discharge), or may lead to a continuous arc discharge if protective devices fail to interrupt the current in a high power circuit[3].

Under sufficient electrical stress, electrical breakdown can occur within solids, liquids, gases or vacuum. However, the specific breakdown mechanisms are significantly different for each, particularly in different kinds of dielectric medium[4].

2.2 Flashover

Flashover occurs due to the insulation resistance between the two rods is decreasing while the voltage between the two rods is increasing, causing the insulation is turned into a conductor and sustained arc[5]. This explanation is delegated shown at Figure 2.1.

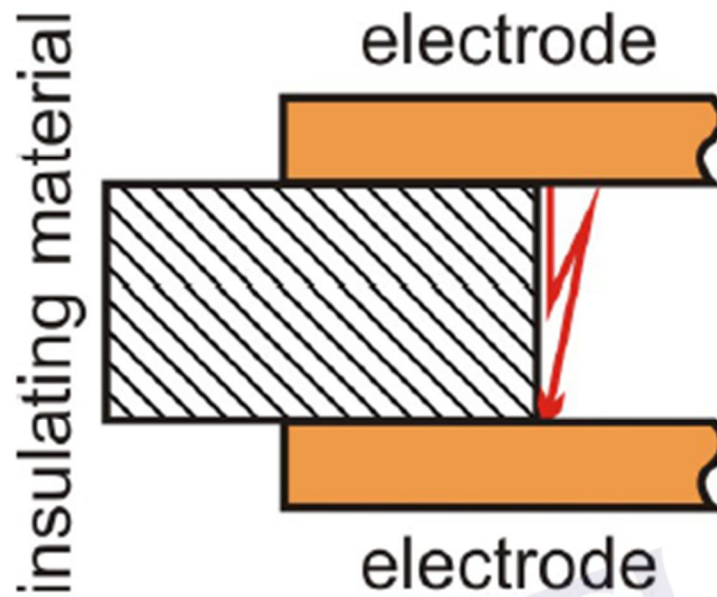


Figure 2.1: Electrode configuration for flashover [6].

2.3 Spark over voltage

A spark gap consists of an arrangement of two conducting electrodes separated by a gap usually filled with a gas such as air, designed to allow an electric spark to pass between the conductors as shown at Figure 2.2. When the voltage difference between the conductors exceeds the gap's breakdown voltage, a spark forms, ionizing the gas and drastically reducing its electrical resistance[6]. This usually happens when the voltage drops, but in some cases occurs when the heated gas rises, stretching out and then breaking the filament of ionized gas. Usually, the action of ionizing the gas is violent and disruptive, often leading to sound (ranging from a *snap* for a spark plug to thunder for a lightning discharge) light and heat[7].

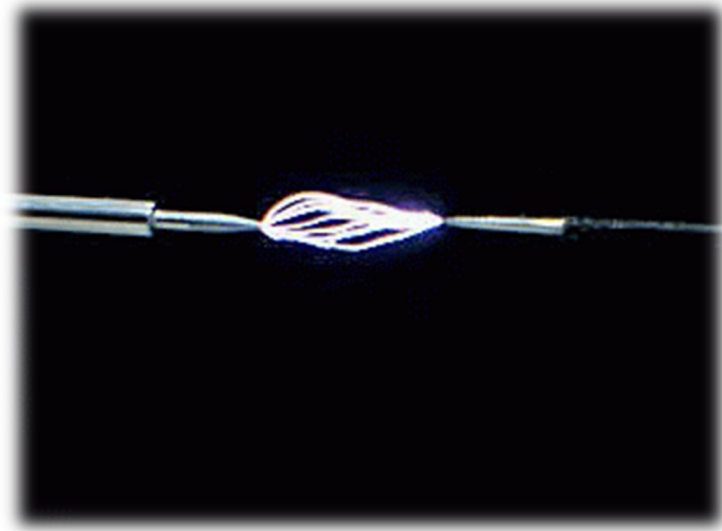


Figure 2.2: Spark over voltage occurred [7].

2.3.1 Townsend theory

Consider a simple electrode arrangement as shown in the Figure 2.1, having two parallel plate electrodes separated by a distance d and immersed in a gas at pressure p . A uniform E is applied between two electrodes. Due to any external radiation (ultra violet illumination) free electrons are liberated at the cathode. When an electron, e is placed in an E it will be accelerated with a force eE towards the anode.

This electron collides with the other gas molecules while it is traveling towards the anode. If the energy of the electron is sufficiently large (about 12.2 eV for N_2 or 15.5 eV for O_2), on collision it will cause a break-up of the atom or molecule into positive ion and electron, so the new electrons and positive ions are created. Thus created electrons form a group or an avalanche and reach the anode. This is the electric current and if it is sufficiently large it results in the formation of a conducting path between the electrodes resulting in the breakdown of the gap[8]. The Townsend theory also visual at Figure 2.3.

Visualisation of a Townsend Avalanche

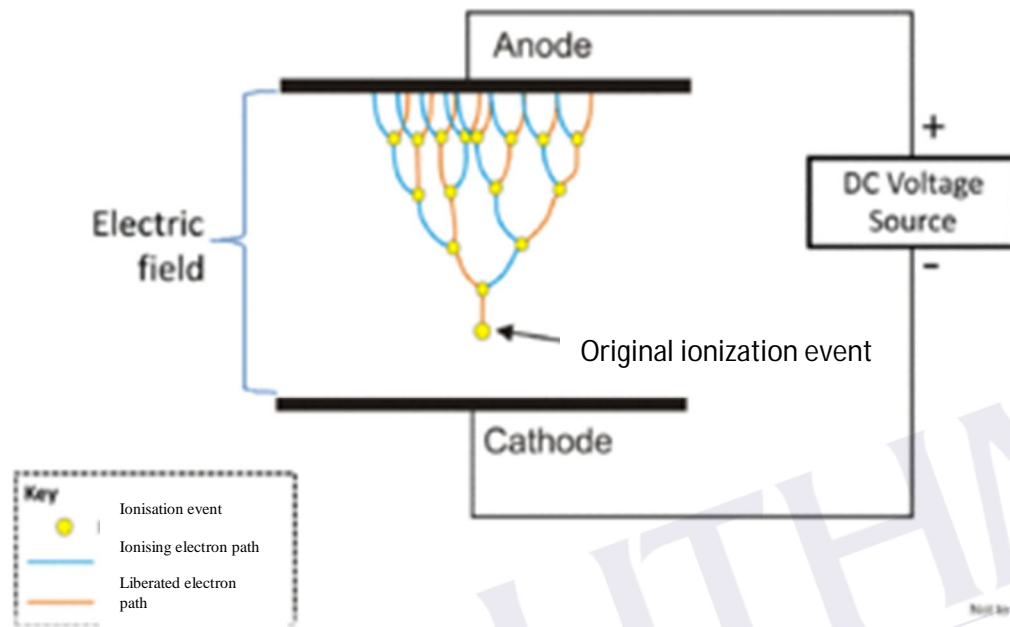


Figure 2.3: Visualisation of a Townsend Avalanche [8].

2.3.2 Paschen's Law

Paschen's Law is an equation that gives the breakdown voltage, that is the voltage necessary to start a discharge or electric arc, between two electrodes in a gas as a function of pressure and gap length. It is named after Friedrich Paschen who discovered it empirically in 1889[9].

Paschen studied the breakdown voltage of various gases between parallel metal plates as the gas pressure and gap were varied. The voltage necessary to arc across the gap decreased as the pressure was reduced and then increased gradually, exceeding its original value. He also found that at normal pressure, the voltage needed to cause an arc reduced as the gap size was reduced but only to a point. As the gap was reduced further, the voltage required to cause an arc began to rise and again exceeded its original value. For a given gas, the voltage is a function only of the product of the pressure and gap length. The curve he found of voltage versus the pressure-gap length product is called

Paschen's curve. He found an equation that fitted these curves, which is now called Paschen's law.

At higher pressures and gap lengths, the breakdown voltage is approximately proportional to the product of pressure and gap length, and the term Paschen's law is sometimes used to refer to this simpler relation[10]. However this is only roughly true, over a limited range of the curve as shown at Figure 2.4.

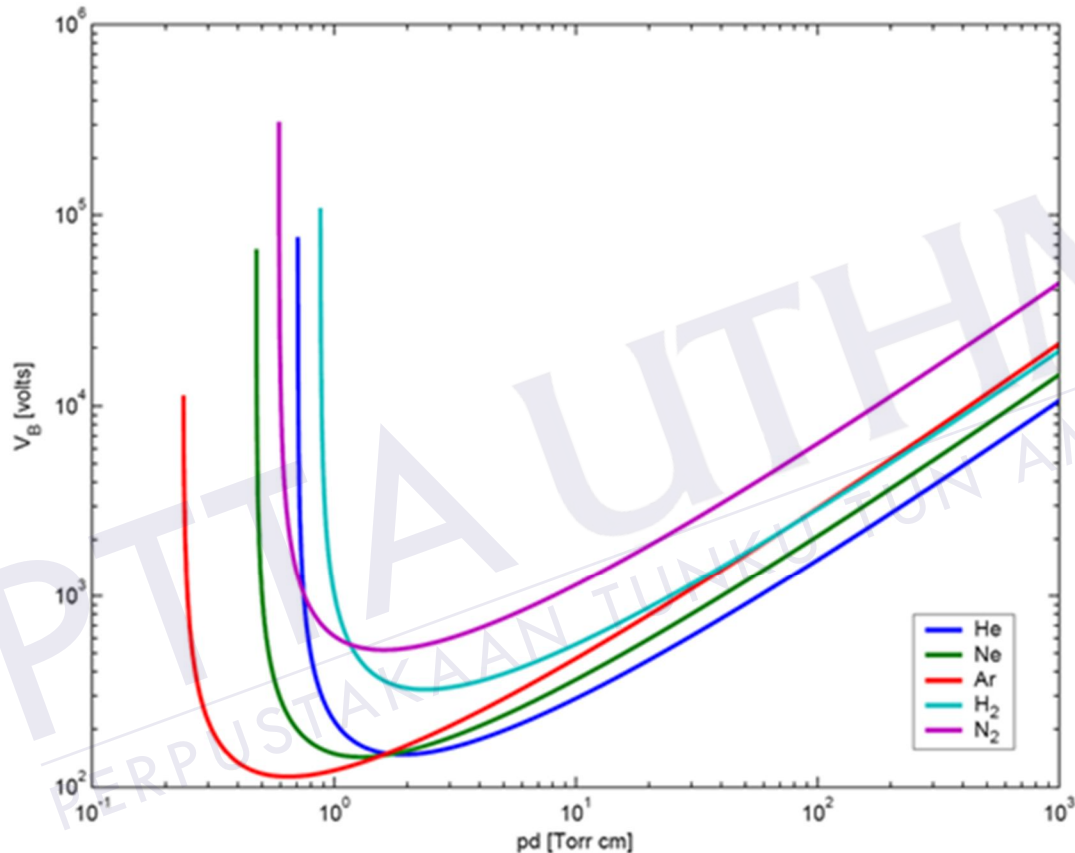


Figure 2.4 : Paschen Law Curve Characteristic [10].

2.4 Marx Generator

A Marx generator is an electrical circuit first described by Erwin Otto Marx in 1924. Its purpose is to generate a high-voltage pulse. Marx generators are used in high energy physics experiments, as well as to simulate the effects of lightning on power line gear and aviation equipment. A bank of 36 Marx generators is used by Sandia National Laboratories to generate X-rays in their Z Machine. The circuit generates a high-voltage

pulse by charging a number of capacitors in parallel, then suddenly connecting them in series[11]. See the circuit at Figure 2.5, at first, n capacitors (C) are charged in parallel to a voltage V by a high voltage DC power supply through the resistors (R_C). The spark gaps used as switches have the voltage V across them, but the gaps have a breakdown voltage greater than V , so they all behave as open circuits while the capacitors charge. The last gap isolates the output of the generator from the load; without that gap, the load would prevent the capacitors from charging. To create the output pulse, the first spark gap is caused to break down (triggered); the breakdown effectively shorts the gap, placing the first two capacitors in series, applying a voltage of about $2V$ across the second spark gap. Consequently, the second gap breaks down to add the third capacitor to the "stack", and the process continues to sequentially break down all of the gaps. The last gap connects the output of the series "stack" of capacitors to the load. Ideally, the output voltage will be nV , the number of capacitors times the charging voltage, but in practice the value is less. Note that none of the charging resistors R_C are subjected to more than the charging voltage even when the capacitors have been erected[12]. The charge available is limited to the charge on the capacitors, so the output is a brief pulse as the capacitors discharge through the load (and charging resistors). At some point, the spark gaps stop conducting and the high voltage supply begins charging the capacitors again.

The principle of multiplying voltage by charging capacitors in parallel and discharging them in series is also used in the voltage multiplier circuit, used to produce high voltages for laser printers and cathode ray tube televisions, which has similarities to this circuit[13]. The difference is that the voltage multiplier is powered with alternating current, and produces a steady DC output voltage, while the Marx generator produces a pulse[14]. The example of Marx Generator is shown at Figure 2.6.

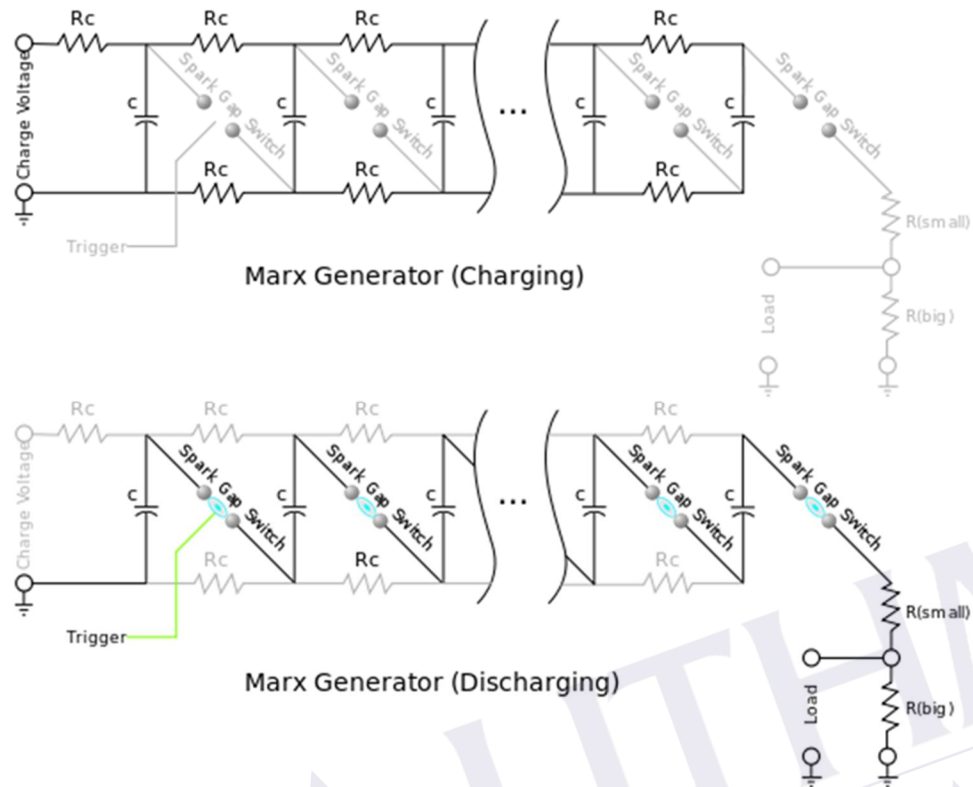


Figure 2.5 : Marx Generator connection during charging and discharge [12].



Figure 2.6: Marx Generator [14].

2.5 Lightning in Malaysia

Lightning strike comes about every day in the world. The lightning strike towards the surface on earth has been estimated at 100 times every second[15]. United State National Lightning Safety Institution reported that Malaysia has highest lightning activities in the world while the average thunder day level for Malaysia's capital Kuala Lumpur within 180 - 260 days per annum Isokeraunic level is approximately 200 thunderstorm days a year. The lightning ground flash density is about 15-20 strike per km per year[15].

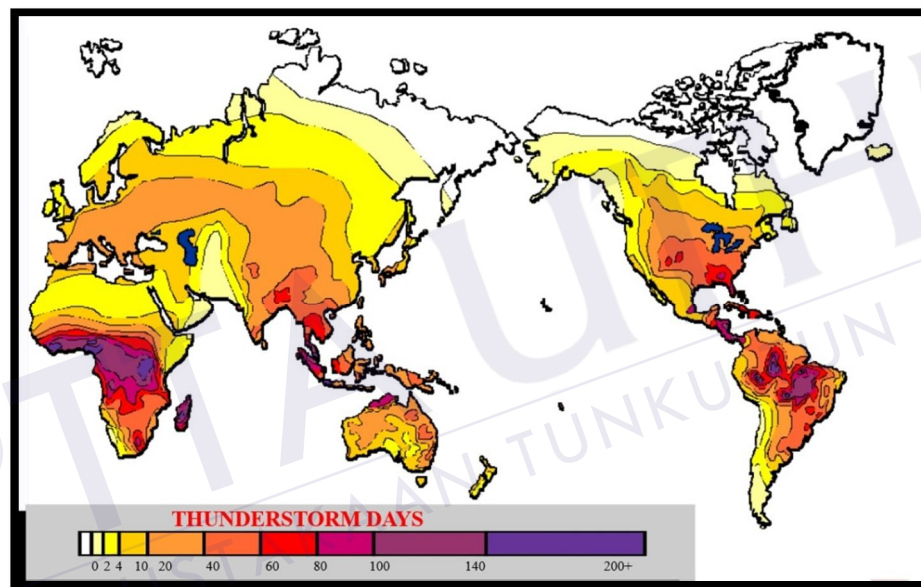


Figure 2.7 : World Isokeraunic Map [15].

Lightning has an extremely high current, high voltage and transient electric discharge. It is transient discharge of static electricity that serves to re-establish electrostatic equilibrium within a storm environment Malaysia lies near the equator and therefore it is categorized as prone to high lightning and thunderstorm activities[16]. Observations performed by the Malaysian Meteorological Services indicate that thunders occur 200 days a year in Malaysia. Thunderstorms have been suspected to have caused between 50% and 60 % of the transient tripping in the transmission and distribution networks for Tenaga Nasional Berhad (TNB), Malaysia's electric power provider[17]. The main reason could be short of precise and consistent.

METHODOLOGY

The diagram illustrates a high-voltage test setup for a transformer. The primary winding is connected to a 0-220V AC source. The secondary winding is connected through a series of HV components (HV9105, HV9111, HV9109, HV9121, HV9118, HV9112, HV9114, HV9119, HV9110) to a DSO. A V.I.-LV Instruments unit is also connected to the circuit.

Figure 3.1: Impulse Voltage Generator test setup [14]

Table 3.1: Table of list equipment

Component Description	TERCO type	Quantity
HV Test Transformer	HV9105	1
Control Desk	HV9103	1
Smoothing Capacitor	HV9112	1
Load Capacitor	HV9120	1
Silicon Rectifier	HV9111	2
Measuring Resistor	HV9113	1
Charging Resistor	HV9121	1
Wavefront Resistor	HV9122	1
Wavetail Resistor	HV9123	1
Sphere Gap	HV9125	1
Drive for sphere gap	HV9126	1
Insulating Rod	HV9124	2
Connecting Rod	HV9108	2
Connecting cup	HV9109	7
Floor Pedestal	HV9110	6
Space Bar	HV9119	4
Electrode	HV9138	1
Earthing Switch	HV9114	1
Earthing Rod	HV9107	1
DC Voltmeter	HV9151	1
Impulse Peak Voltmeter	HV9152	1
Measuring Spark Gap	HV9133	1
Spacer Bar (for HV9133)	HV9118	1

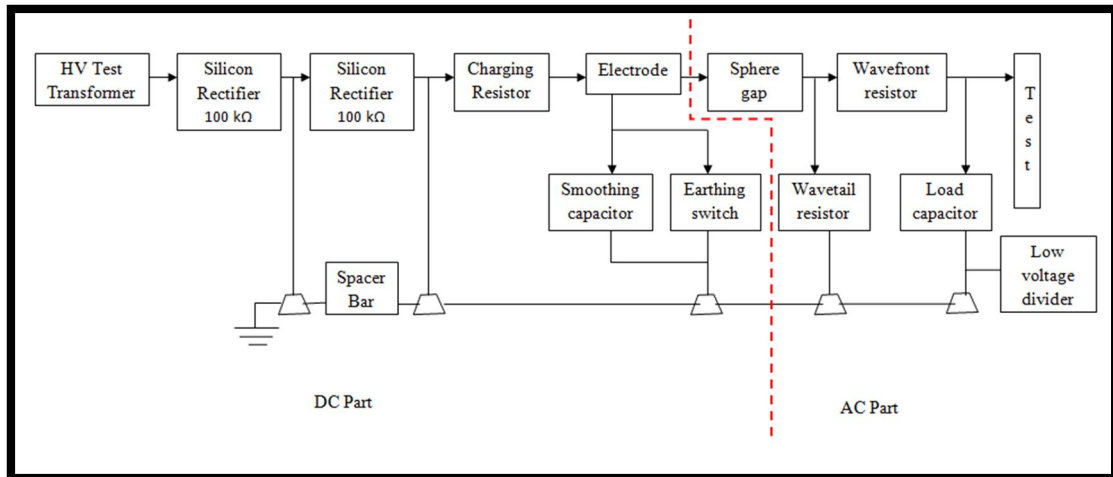


Figure 3.2 : Block Diagram [14]

In our test, we used the Single Stage Test Set Up as shown at Figure 3.3, which contain Silicon Rectifier as Figure 3.4 and Charging Rectifier as Figure 3.5. Silicon Rectifier used to convert the AC input from the transformer into DC output to produce the Impulse Voltage.



Figure 3.3: Single Stage Test Set-Up

REFERENCES

1. Naidu, M.S. and V. Kamaraju, *High voltage engineering* 2013: Tata McGraw-Hill Education.
2. Meek, J.M. and J.D. Craggs, *Electrical breakdown of gases*. 1978.
3. Brown, R.E., *Electric power distribution reliability* 2008: CRC press.
4. Dissado, L.A. and J.C. Fothergill, *Electrical degradation and breakdown in polymers* 1992: IET.
5. Forrest, J., *The characteristics and performance in service of high-voltage porcelain insulators*. Journal of the Institution of Electrical Engineers-Part II: Power Engineering, 1942. 89(7): p. 60-80.
6. Hagenguth, J., *Short-time spark-over of gaps*. Electrical Engineering, 1937. 56(1): p. 67-76.
7. Seargent, D.A., *Lightning's Gleaming Rod*, in *Weird Weather* 2012, Springer. p. 149-213.
8. Roe, R.M., J.R. Busemeyer, and J.T. Townsend, *Multialternative decision field theory: A dynamic connectionist model of decision making*. Psychological review, 2001. 108(2): p. 370.
9. Howell, A.H., *Breakdown studies in compressed gases*. Electrical Engineering, 1939. 58(5): p. 193-206.
10. Go, D.B. and D.A. Pohlman, *A mathematical model of the modified Paschen's curve for breakdown in microscale gaps*. Journal of Applied Physics, 2010. 107(10): p. 103303.
11. Zaccarian, L., et al. *A control theory approach on the design of a Marx generator network*. in *Pulsed Power Conference, 2009. PPC'09. IEEE*. 2009. IEEE.
12. Kuffel, J., E. Kuffel, and W.S. Zaengl, *High voltage engineering fundamentals* 2000: Newnes.

13. Fitch, R.A. and W.F. Crewson, *MARX GENERATOR AND TRIGGERING CIRCUITRY THEREFOR*, 1973, US Patent 3,746,881.
14. Baek, J.W., et al., *Solid state Marx generator using series-connected IGBTs*. Plasma Science, IEEE Transactions on, 2005. 33(4): p. 1198-1204.
15. Abidin, H.Z. and R. Ibrahim. *Thunderstorm day and ground flash density in Malaysia*. in *Power Engineering Conference, 2003. PECon 2003. Proceedings. National*. 2003. IEEE.
16. Abdullah, N., M.P. Yahaya, and N.S. Hudi. *Implementation and use of lightning detection network in Malaysia*. in *Power and Energy Conference, 2008. PECon 2008. IEEE 2nd International*. 2008. IEEE.
17. Khan, N., et al., *Laser-triggered lightning discharge*. New Journal of Physics, 2002. 4(1): p. 61.
18. Rizk, F.A., *A model for switching impulse leader inception and breakdown of long air-gaps*. Power Delivery, IEEE Transactions on, 1989. 4(1): p. 596-606.

