

# A CONCEPT FOR WILDLIFE TRACKING USING ULTRA HIGH FREQUENCY (UHF) RADIO

MOHD ZAIN BIN ABDUL RAHIM

A project report submitted in partial  
fulfillment of the requirement for the award of the  
Degree of Master of Electrical Engineering

Faculty of Electric & Electronic Engineering  
Universiti Tun Hussein Onn Malaysia

JULY 2014

## DEDICATION

This research is dedicated to my family especially to my beloved wife and children, Majidah binti Ramli, thank you for the support, encouragement and spiritual, also thanks to my supervisor, Dr Samsul Haimi bin Dahlan for the guidance, opinions and advices.

Thanks for all the advices, supports and love.



PTTA UTHM  
PERPUSTAKAAN TUNKU TUN AMINAH

## ACKNOWLEDGEMENT

Firstly, I would like to thank ALLAH for blessing me to complete for this project within the given period of time. My deepest thank to my beloved parents and family for their encouragement and spiritual. I also would like to thank all my friends especially Mr. Roduan Hishambri bin Ismail, for their generosity and kindness in helping me to giving the new ideas, opinions, sharing the knowledge's, suggestion and the supports.

A very special appreciation goes to my supervisor, Dr. Samsul Haimi bin Dahlan, for their guidance, patience and endless encouragement throughout this project. Under guidance of them, I have been able to finish my project within the scope of works and to achieve the objectives of this project. A lot of thank to all the contributors whose names have been missed out in the list of acknowledgement.



## ABSTRACT

Wildlife tracking technology is a method routinely used in the detection of small animals or big animals. Normally, a radio tracking using a low frequency between 30MHz to 300MHz known as Very High Frequency (VHF). In this study, a band of Ultra High Frequency (UHF) with a frequency 315MHz is used as a transmitter. While a encoder HT12E is used as a function of generate a data signal to the RF Transmitter module 315MHz to transmit. The signal sent by the transmitter detected by Yagi antenna as a receiver and was designed at a frequency of 315MHz with a gain is 10.68dBi. Received power detected by Yagi antenna shown at Anritsu Spectrum Analyzer. The highest differences between power received at vegetation area compared to open area is about 10dBm while the furthest distance of the receiver can be traced in the vegetation area is about 67 meters, and for open area is more than 70 meters. The results of this study agreed with Tamir' model for propagation in forest whereas can be used in a prediction of initial pattern of power received signal which is gradually decrease if a receiver moves away from the transmitter over much larger distances.

## ABSTRAK

Pengesanan hidupan liar merupakan kaedah teknologi yang sentiasa digunakan dalam mengesan haiwan samada haiwan kecil atau haiwan besar. Kebiasaannya, Radio Frekuensi yang digunakan adalah pada frekuensi rendah diantara 30MHz sehingga 300MHz yang dikenali sebagai Very High Frekuensi (VHF). Dalam kajian ini, penghantar yang digunakan menggunakan frekuensi 315MHz iaitu dalam jalur Ultra High Frekuensi (UHF). Enkoder yang digunakan adalah HT12E yang berfungsi untuk menghantar isyarat kepada *RF Transmitter module* yang berfrekuensi 315MHz. Isyarat yang dihantar oleh penghantar akan dikesan oleh antenna berarah sebagai penerima iaitu Yagi antenna yang direka pada frekuensi 315MHz dengan gain adalah 10.68dBi. Yagi antenna akan mengesan kuasa penerima menggunakan Anritsu Spectrum Analyzer. Data di kawasan berpokok renek dan kawasan dibandingkan dimana perbezaan tertinggi di antara dua kawasan adalah 10dBm manakala jarak yang paling jauh kuasa penerima dapat dikesan dalam kawasan berpokok renek adalah 67 meter manakala untuk kawan lapang adalah lebih daripada 70 meter. Hasil kajian ini mengesahkan Tamir model boleh digunakan dalam menjangkakan corak awal kuasa penerima dengan pertambahan jarak receiver dari transmitter.

## TABLE OF CONTENTS

<b>TITLE</b>	i
<b>DECLARATION</b>	ii
<b>DEDICATION</b>	iii
<b>ACKNOWLEDGEMENT</b>	iv
<b>ABSTRACT</b>	v
<b>ABSTRAK</b>	vi
<b>TABLE OF CONTENTS</b>	vii
<b>LIST OF FIGURES</b>	ix
<b>LIST OF TABLES</b>	xi
<b>LIST OF ABBREVIATIONS AND SYMBOLS</b>	xii
<b>LIST OF APPENDICES</b>	xiii
<b>CHAPTER 1 INTRODUCTION</b>	1
1.1 Overview	1
1.2 Problem Statement	4
1.3 Objectives	4
1.4 Scope	4
<b>CHAPTER 2 FUNDAMENTAL OF ANIMAL</b>	
<b>TRACKING SYSTEMS</b>	6
2.1 Introduction	6
2.2 Radio Frequency (RF)	6
2.3 Spectrum Management in Malaysia	7

2.4 Modulation Technique (ASK)	8
2.5 RF Transmitter Module 315 MHz	10
2.6 Yagi Antenna	11
2.7 YagiCAD	16
<b>CHAPTER 3 LITERATURE REVIEW</b>	17
<b>CHAPTER 4 METHODOLOGY</b>	22
4.1 Transmitter	22
4.2 Yagi Antenna Design	23
4.3 Data collection	29
<b>CHAPTER 5 RESULT AND DISCUSSION</b>	33
5.1 Introduction	33
5.2. Free Space area	33
5.3. Vegetation area	37
5.4. Differences between Free space and vegetation area	40
<b>CHAPTER 6 CONCLUSION</b>	41
<b>REFERENCES</b>	43
<b>APPENDIX</b>	46
<b>VITA</b>	

## LIST OF FIGURES

2.1	A Transmitting station in Terengganu	8
2.2	RF Transmitter module	10
2.3	Configuration for a general Yagi-Uda antenna	11
2.4	Measured gain in dBd of a dipole and reflector element for different spacings $S_R$	12
2.5	Gain of a typical Yagi-Uda antenna versus the total number of elements	13
2.6	Design curves for Yagis in Table 2.3	14
2.7	Graph showing effect of supporting metal boom on the length of Yagi	14
3.1	Geometry of the Yagi–Uda dipole array antenna	19
3.2	Calculated radiation patterns of a 14-element Yagi–Uda dipole array antenna. The outer curve is the H-plane pattern; the inner curve is the E-plane pattern. The array is positioned vertically, with the directors on the top.	20
3.3	Adaptation of Tamir’s concept of lateral wave for irregular terrain and Canopy, with the most significant propagation path indicated (dashed line)	21
4.1	Transmitter circuit on PCB	23
4.2	A transmitter with 315MHz frequency	23
4.3	Use of design curves in determining elements lengths of $0.8\lambda$ Yagi	25
4.4	A YagiCAD6 for Yagi antenna design with a calculation parasitic length	26
4.5	A power pattern of Yagi antenna design for calculation parasitic length	26



4.6	A YagiCAD6 for Yagi antenna design after optimized of parasitic length	27
4.7	A power pattern of Yagi antenna design for calculation parasitic length	27
4.8	A Yagi antenna design displayed graphically	28
4.9	A copper parasitic elements with different lengths	28
4.10	A Yagi Antenna for 315Hz	29
4.11	VHF Triangulation. (a) The user obtains a bearing to the transmitter, using a directional receiver.(b) The user moves to a different location and obtains another bearing to the transmitter. (c) Knowing the locations where the fixes were taken, the user	30
4.12	A signal from transmitter will be detect at receiver using spectrum analyzer.	31
4.13	A study done around Bukit Bauk Area (with a yellow dot circle)	31
5.1	A power received for free space area (football field)	35
5.2	A data measurement for difference distance (10m,13m,14m,19m,21m)	35
5.3	A data measurement for difference distance (22m,25m,28m,29m,34m,39m)	36
5.4	A data measurement for difference distance (42m,45m,47m,48m,51m,55m)	36
5.5	A power received for Vegetation area	38
5.6	A data measurement for difference distance (7m,9m,13m,48m,20m,22m)	38
5.7	A data measurement for difference distance (26m,28m,30m,32m,36m,42m)	39
5.8	A data measurement for difference distance (64m,67m)	39
5.9	Power received between open area and vegetation area	40

## LIST OF TABLES

2.1	Table of Frequency Allocations ("Malaysian Table')	8
2.2	Specification of the RF Transmitter Module	10
2.3	Optimized Lengths of Parasitic Dipoles for Yagi-Uda Array Antennas	15
4.1	Ground-based radio-tracking methods and their application	29
4.2	A power received data collection	32
5.1	Power Received between transmitter and receiver at football field area	34
5.2	Power Received between transmitter and receiver at Vegetation Area	37

## LIST OF ABBREVIATIONS AND SYMBOLS

VHF - Very High Frequency

UHF - Ultra High Frequency

ASK - Amplitude Shift Keying

RF - Radio Frequency

$P_r$  - Power Received

OOK - On Off Keying



PTTA UTHM  
PERPUSTAKAAN TUNKU TUN AMINAH

**LIST OF APPENDICES**

<b>APPENDIX</b>	<b>TITLE</b>	<b>PAGES</b>
A	Picture of Collecting Data at Vegetation Area	46
B	Picture of Tracking System (Yagi antenna, Transmitter and Spectrum Analyzer	47
C	Picture of Study Site (Vegetation and Field Area)	48
D	Data Sheet for HT12E	49



PTTA UTHM  
PERPUSTAKAAN TUNKU TUN AMINAH

## CHAPTER 1

### INTRODUCTION

#### 1.1 Overview

To determine the behavior and location of wild animal, they need to be monitored in some way. Typically, to be able to detect animals remotely, an electronic tracking device is tagged on the animal. After many years searching a new method of tracking animal, finally scientist found a new ways to track or determine a movement of animal by using a radio tracking system. Radio tracking systems have been used today can be divided into three types; VHF Radio Tracking, Satellite tracking and Global Positioning System (GPS) Tracking. Each types of system have advantages and disadvantages.

A radio tracking system using VHF tracking, first used in 1963 [1]. In order to use a VHF radio tracking, once a radio transmitter is placed on animal, it begins periodically emits a signal to a radio antenna and receiver. If we want to locate an animal using radio tracking, we must be close enough to the animal with the radio antenna so a signal from a radio transmitter on the animal can be detect. But no signal will be detected if a receiver is out of a range or a far away.

While Satellite tracking is similar with VHF radio tracking but instead of radio signal being sent to receiver a radio signal from transmitter on animal is sent directly to a special satellite. Particularly, satellite tracking using the AGROS system (launched in 1978 [2]), which allow researchers to automatically determine the position of animals anywhere in the world [3]. Therefore, a researcher can be picks up a signal without stay close with the animal and it can be track using computer. It mean that, position is inferred from the Doppler shift of the carrier wave received at the

satellite while from the data, approximate can be determined. A tracking device must be larger than VHF tag due to a signal has to be strong enough to be received in space. In additional, ARGOS tags are expensive and have to be paid annually. An accuracy of location determines using satellite tracking is quite poor, often with errors in a few hundred meters [2]. Therefore, it is suitable being used for migratory species.

And the newest technology being used to track animal is GPS tracking [4]. A difference between two types before, a radio receiver, not a transmitter is placed on animal and it picks up a signal from special satellite. A computer at the receiver will calculate a location and animal activities then it will be sent to another satellite and the data will be analysis after received it from second set of satellite. GPS tracking has had a significant impact on wildlife research by enabling the acquisition of detailed location information anywhere in the world with excellent accuracy. A GPS receiver is able to acquire locations on demand, something which is impossible with satellite tracking, due to the sparsely of satellite coverage. The locations obtained by GPS tracking are much more accurate than satellite tracking (typical accuracy for GPS is 5 m, whereas the best satellite tracking accuracy is in the order of 100 m).

A great advantage of GPS tracking in comparison to VHF tracking is that minimal time is needed in the field. As the GPS unit calculates its position itself, the labour costs associated with GPS tracking are substantially lower. In addition, the possibility of bias introduced through disturbing the habitat of the subject being studied is greatly reduced. VHF tracking also has very limited coverage – it is not suitable for wide ranging animals, as the maximum range that an animal can be detected is 8 – 10km (or 15 – 30 km from air ). GPS on the other hand is a global tracking system.

The main drawback of GPS tracking in comparison to VHF tracking is the power consumption of the GPS receiver. For this reason, GPS receivers are duty-cycled such that they spend the majority of their time in low power sleep mode. As a (simple and optimistic) example, a GPS receiver acquiring locations every 10 minutes, with an average time-to-first-fix (TTFF) of 20 s, consumes an average power of 3.3 mW, if the power consumption when the receiver is active is 100 mW. In comparison, a VHF beacon transmitting at a power of 10 mW every second for 30 ms at an efficiency of 40% will consume an average power of 0.75mW. Thus, for the same lifetime, the GPS unit must have more than four times as much battery capacity as for the VHF unit. As the majority of the weight of the unit is due to the energy source, this

has the implication that the GPS unit will weigh approximately four times more than the VHF unit. Due to their complexity, GPS collars are more expensive than VHF beacons. A typical VHF transmitter costs in the region of U\$100 – U\$200 [5], whilst a GPS collar will cost in the region of U\$2500–U\$4500, depending on which options (such as satellite upload) are installed [6]. It is much costing, therefore more discussion will be focus on VHF radio tracking in this study.

A conventional VHF radio tracking system consists of transmitting and receiving systems. Therefore several aspects of the way radio-waves behave to be consider such as attenuation by trees and dense vegetation, reflection, diffraction and a last is polarization of receiving antenna whether it may be horizontally or vertically polarized and the best signal reception the element on a receiver antenna (e.g Yagi Uda) should be in the same orientation.

VHF tracking is a simple, relatively low cost method of tracking animals. A typical transmitter tag (depending on options) costs in the range of U\$100 to U\$200 [5]. Because of the low transmitter power and duty cycle of the VHF tags, battery capacities do not have to be large. The smallest VHF transmitters available weigh approximately 0.2 g, but these have a limited output power and a very short lifetime (two – three weeks) [7]. For longer studies, a tracking collar that weighs approximately 500 g can transmit an RF signal for over 4 years [5]. VHF tracking is applicable to a wide range of animal species, from very small animals (and even insects [7]) to large mammals. The main disadvantage of VHF tracking is the labour (and costs associated with labour) involved in triangulation, leading to a paucity of fixes [8].

Although the cost of the equipment is the lowest of the three tracking methods (being VHF, satellite and GPS tracking), the cost per fix is very high – one study found that the cost per fix for VHF was U\$65 in comparison to U\$8 for GPS [9]. Although a cost per fix is high but VHF tracking is better for overall costing.

In order to detect signal from an animal, there are a lot of antenna have been used such as Adcock (H), or loop antenna but the most commonly used antenna is the Yagi Antenna [10]. This antenna looks the most like the typical TV antenna. It is the most popular, in spite of its huge, unwieldy size, because it is the most directional. A Yagi Antenna pinpoints the direction the signal is coming from better than most. Still, with a Yagi, the loudest signal will cover a range of about 60 degrees [11]. It is best to record the direction at which this loud signal begins and ends and then to calculate the

midpoint for use in analysis. If the signal covers more or less than 60 degrees, it needs to adjust the gain (decrease or increase, respectively).

## **1.2 Problem Statement**

For many years the only way to track wildlife was to simply follow and observe the movement and habits of animal or to capture an animal and put a tag on it and hope that at sometime in the future the same animal would be captured.

But today, scientists have new tools like a radio tracking system to determine an animal's behavior. One of the types of radio tracking systems used today is VHF Radio Tracking. By using this technology, animals can be track easily but how a system can operate in a different distance at various area and weather conditions. Therefore, a study in this research focus on a pattern of received radio signal from a radio transmitter tagged on animal in a different weather. Consideration of distance and surrounding condition will be calculated in order to have a pattern of animal's activities in that area.

## **1.3 Objectives**

The objective of my research is to study a concept of radio tracking for wildlife

1. To design and fabricate a wild animal tracking system consisting of an RF transmitter system and a receiver for animal tracking.
2. To study patterns of received radio signal to approximate animal's position and distance at various area.

## **1.4 Scope**

1. To design an RF transmitter operated at 315 MHz with power received between -0dBm into -120dBm.



2. To design and fabricate a directional antenna (e.g Yagi Uda) for detection purposes.
3. Tracking mechanism is based on the received signal strength amplitude measured using spectrum analyzer (Model Anritsu).
4. Studies will be done around Bukit Bauk area, Dungun.



## **CHAPTER 2**

### **FUNDAMENTAL OF ANIMAL TRACKING SYSTEMS**

#### **2.1 Introduction**

Wildlife tracking involves acquiring information about the behavior of animals in their natural habitat. The purposes of this information is used both for scientific and conservation. The primary form of information that needs to be obtained is the location of the animal (such as mousedeer, fox etc.) at certain points in time and this is generally referred to as tracking or radio-tracking

Basically, an animal tracking system can be divided into parts such as radio transmitter, receiver and directional antenna as receiving antenna ( Yagi antenna).

#### **2.2 Radio Frequency (RF)**

Radio frequency (RF) is a frequency or rate of oscillation within the range of about 3 Hz to 300 GHz. This range relates to frequency of alternating current electrical signals used to produce and detect radio waves. Then most of this range is beyond the vibration rate that most mechanical systems can respond to, RF usually refers to oscillations in electrical circuits. Different range of oscillation will have different wavelength, which determine the power of the transmission. For example, at ultrahigh frequency (UHF-300–3000MHz), wavelength is 1–10 m which can travel in the range of hundreds of kilometers is suitable applied in FM broadcasting, broadcast television, GPR, amateur radio, aviation, MRI and etc.. In other word, RF is considered long range wireless communication technology. Radio frequency (RF) offers greater range

and penetrating power compare to other wireless communication technology. VHF signals will have better penetration of vegetation and buildings than UHF, which is a significant reason why they're popular for outdoor "fox hunting" and animal tracking etc.

## **2.3 Spectrum Management in Malaysia**

The International Telecommunications Union ('ITU'), a specialized agency under United Nations, is responsible for the harmonization on the global use of the spectrum including Malaysia. The ITU Radio regulations ('Radio Regulations') is an international treaty that contains the world's frequency allocation table (see 'ITU Allocation Table'). This table is important as it forms the framework for international, regional and national spectrum planning, allocations and assignments.

Malaysia is a signatory to the Constitution and Convention of the ITU and the Radio Regulations which are reviewed or revised at the ITU World Radio communications Conference ('WRC'), held every three or four years. The structure of Malaysia's Spectrum Plan is based on the ITU Allocation Table contained in the Radio Regulations. For easy reference, the ITU Allocation Table has been reproduced in this Spectrum Plan together with the relevant accompanying footnotes.

This Spectrum Plan divides the spectrum in Malaysia into a number of frequency bands and specifies the general purposes for which the bands may be used and this process is referred to as the allocation of frequency bands to the identified radio communication services. The Malaysian allocations listed herein sets out the Malaysian Table of Frequency Allocations ('Malaysian Table'). Accompanying Malaysian footnotes (denoted as MLA) and international footnotes have been included, where necessary, to assist in the understanding of matters which are relevant to Region 3 and Malaysian specific conditions. Table 1 shown ITU Allocation Table for frequency 315 MHz have been used in this project.

Table 2.1 Table of Frequency Allocations ("Malaysian Table")

Frequency Band (MHz)	ITU Allocations			Malaysian Allocations
	Region 1	Region 2	Region 3	
312-315	FIXED MOBILE Mobile-satellite (Earth-to-space) 5.254 5.255			FIXED MOBILE Mobile-satellite (Earth-to-space) 5.254 5.255 MLA3 MLA14 MLA94
315-322	FIXED MOBILE 5.254			FIXED MOBILE 5.254 MLA3 MLA14 MLA94

The Malaysian Table allocates the spectrum between 9 kHz and 420 THz. It should be noted that although the Malaysian Table is generally aligned with the Article 5 of the Radio Regulation for Region 3, some differences do exist. This is because, where necessary, variations have been incorporated to reflect Malaysian domestic requirements. Nevertheless, any variation undertaken is subject to the conditions contained in the Radio Regulations that the associated radio installations do not cause harmful interference to the radio services or communications in the jurisdiction of the rest of the ITU member states that operate in accordance with the provisions of the Radio Regulations.

Terengganu is one of a state in Malaysia and have a lot of transmitting station including Bukit Bauk which a transmission coverage a Dungun area shown in figure 2.1

Terengganu							
Stesen Pemancar Transmitting Station	Kawasan Liputan Transmission Coverage	RTM TV 1	RTM TV 2	Media Prima TV 3	Media Prima ntv 7	Media Prima 8 tv	Media Prima tv 9
Bukit Besar	Kuala Terengganu	VHF 5	VHF 8	VHF 11			UHF 36
Bukit Jerung	Kuala Terengganu				UHF 28		
Bukit Bauk	Dungun	VHF 6	VHF 9	UHF 27			
Bukit Bintang	Besut	VHF 7	VHF 12				
Bukit Durian Mas	B.M. Shah	UHF 21	UHF 25				

Figure 2.1 A Transmitting station in Terengganu

## 2.4 Modulation Technique (ASK)

Modulation is a process where a Radio Frequency (RF), amplitude, frequency or phase is changed in order to transmit intelligence. The characteristics of the carrier wave are instantaneously varied by another "modulating" waveform. The main

purpose of modulation is to overcome any inherent incompatibilities between the electromagnetic properties of the modulating signal and those of the transmission medium. In most applications of modulation the carrier signal is a sine wave, which is completely characterized by its amplitude, its frequency, and its phase relative to some point in time.

The modulation technique consists of analog modulation in which the modulating signal is analog and digital modulation in which the modulating signal is digital. There are three types of analog modulation techniques such as amplitude modulation (AM), frequency modulation (FM) and phase modulation (PM). In digital modulation, the three types basic of digital modulations technique are known as Amplitude Shift Keying (ASK), Frequency Shift Keying (FSK) and Phase Shift Keying (PSK).

The fundamental properties of the carrier signal are varied in accordance with the digital base band information signal. Digital modulation provides more information capacity, compatibility with digital data services, higher data security, better quality communications, and quicker system availability.

Digital modulation schemes have greater capacity to convey large amounts of information than analogue modulation schemes. Frequency Shift Keying (FSK) and Phase Shift Keying (PSK) used a constant amplitude carrier and the information in phase or frequency variations while Amplitude Shift Keying (ASK) transmits the information in carrier amplitude variations. For this project, it focused on Amplitude Shift Keying (ASK) [12]

Amplitude Shift Keying (ASK) refers to the digital modulation technique which the amplitude of the carrier is varied in accordance with the binary source. Amplitude Shift Keying (ASK) is also known as On-Off Keying (OOK). The carrier is turned ON and OFF for every  $n$  seconds. The ON state represents binary 1 and the OFF state represent binary 0. OOK usually use in the ISM Bands to transfer data between computers. Beside that, OOK also is related with Morse code. It commonly used by amateur radio operators to transmit Morse code over radio frequencies.

## 2.5 RF Transmitter Module 315 MHz

These RF Transmitter Modules are very small in dimension but have a wide operating voltage range (3V-12V). There are 2 types of RF Transmitter Modules, either 315MHz or 433MHz. The RF Transmitter module used in this project is 315MHz. Figure 2.2 shows the RF Transmitter module.

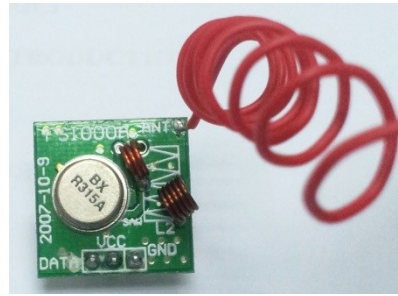


Figure 2.2 RF Transmitter module

The low cost RF Transmitter can be used to transmit signal up to 100 meters. However, it is also depends on the antenna design, working environment and supply voltage which will seriously impact the effective distance. When the voltage is higher, the range becomes greater. It is good for short distance and device's battery power development. It uses the ASK Transmitter Module, where it is based on SAW resonator and accepts digital inputs, which can operate from 3 to 12 Volts-DC. This feature makes the RF enabled products very easy to build. It has benefits of the device in deep sleep mode when data pin is grounded. The specification of the RF Transmitter Module is shown in Table 2.2 below.

Table 2.2 Specification of the RF Transmitter Module

No	Specification	RF transmitter Module
1	Operating voltage	3v-12v
2	Operating current Max	$\leq 40\text{mA}$ (12V), $\text{Min} \leq 9\text{mA}$ (3V)
3	Oscillator SAW	(Surface Acoustic Wave) oscillator
4	Frequency	315MHz~433.92MHz
5	Frequency error	$\pm 150\text{kHz}$ (max)
6	Modulation	ASK/OOK
7	Transfer rate	$\leq 10\text{Kbps}$
8	Transmitting power	25mW (315MHz@12V)
9	Antenna length	24cm (315MHz), 18cm (433.92MHz)

## 2.6 Yagi Antenna

An array antennas can be used to increase directivity. The arrays we examined had all elements active, requiring a direct connection to each element by a feed network [13]. Array feed networks are considerably simplified if only a few elements are fed directly. Such an array is referred to as a parasitic array. The elements that are not directly driven (called parasites) receive their excitation by near-field coupling from the driven elements. A parasitic linear array of parallel dipoles is called a Yagi-Uda antenna, a Yagi-Uda array, or simply "Yagi." Yagi-Uda antennas are very popular because of their simplicity and relatively high gain. In this section, the principles of operation and design data for Yagis will be presented.

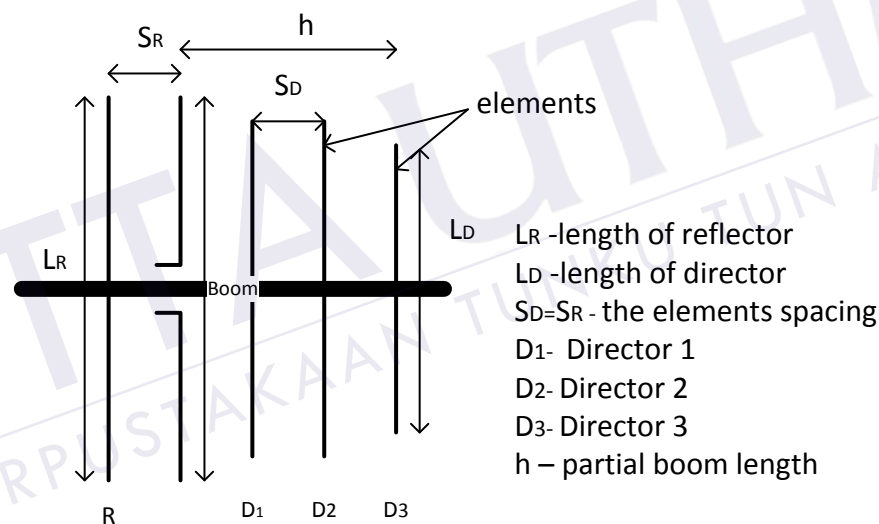


Figure 2.3 Configuration for a general Yagi-Uda antenna

The basic unit of a Yagi consists of three elements. Therefore, to understand the principles of operation for a three-element Yagi, let begin with a driven element (or "driver") and add parasites to the array.

The general Yagi configuration is shown in Figure 2.3. The maximum directivity obtainable from a three-element Yagi is about 9 dBi or 7 dBd while the optimum reflector spacing  $S_R$  (for maximum directivity) is between 0.15 and 0.25 wavelengths as shown in Figure 2.4.

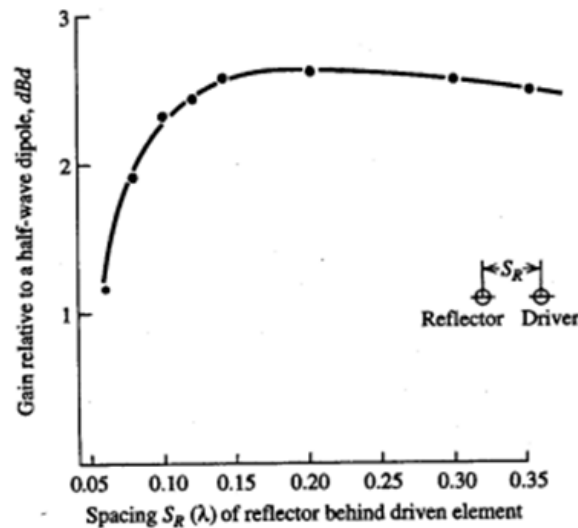


Figure 2.4 Measured gain in dBd of a dipole and reflector element for different spacings  $S_R$

Note that the gain above an isolated dipole is more than 2.5 dBd, whereas if a flat plate were used, instead of a simple wire-like element, the gain would be 3 dBd. Thus, a single wire-like reflector element is almost as effective as a flat plate in enhancing the gain of a dipole.

Director-to-director spacings are typically 0.2 to 0.35 wavelengths, with the larger spacings being more common for long arrays and closer spacings for shorter arrays. Typically, the reflector length is  $0.5\lambda$  and the driver is of resonant length when no parasitic elements are present. The director lengths are typically 10 to 20% shorter than their resonant length, the exact length being rather sensitive to the number of directors  $N_D$  and the inter director spacing  $S_D$ .

The gain of the Yagi is related to its boom length as our study of uniform line sources in the previous chapter suggests, but for a parasitic array such as the Yagi, there is a smaller increase in gain per element as directors are added to the array (if we assume  $S_D$  is fixed) since the Yagi is not uniformly excited.

In fact, the addition of directors up to about 5 or 6 provides a significant increase in gain expressed in dB, whereas the addition of more directors is beyond the "point of diminishing returns" as figure 2.4 shows.



## REFERENCES

1. W. W. Cochran and R. D. Lord, "A radio-tracking system for wild animals," *Journal of Wildlife Management*, vol. 27, p. 9–24, 1963.
2. "ARGOS. Overview of the argos system.," [Online]. Available: <http://www.argos-system.org/>.
3. W. S. Seegar, P. N. Cutchis, M. R. Fuller, J. J. Suter, V. Bhatnagar, and J. G. Wall, "Fifteen years of satellite tracking development and application to wildlife re-search and conservation".
4. Huang et al., "Rapid Prototyping for Wildlife and Ecological Monitoring," *IEEE SYSTEMS JOURNAL*, vol. 4, no. 2, 2010.
5. "BioTrack Telemetry," [Online]. Available: <http://www.biotrack.co.uk>.
6. "Sirtrack Wildlife Tracking Solutions, New Zealand.," [Online]. Available: [online] Available :<http://www.sirtrack.com>.
7. B. Naef-Daenzer, "Miniaturization (0.2·g) and evaluation of attachment techniques of telemetry," *The Journal of Experimental Biology*, pp. 4063-4068, 2005.
8. W. W. Cochran, D. W. Warner, J. R. Tester, and V. B. Kuechle, "Automatic radio-tracking system for monitoring animal movements," *BioScience*, pp. 98-100, 1965.

9. F. Lindzey, H. Sawyer, C. Anderson, and B. Banulis, "Performance of Store-on-Board GPS Collars on Elk, Mule Deer and Mountain Lions in Wyoming, USA," in *Tracking animals with GPS: An International conference* , Aberdeen, Scotland, 2001.
10. D. M. Pozar, "Beam Transmission of Ultra Short Waves:An Introduction to the Classic Paper by H. Yagi," 1997.
11. H. A. O. Raheez Reppal, "Radio Telemetry Antenna Design System For Tracking Small And Slow Moving Objects," *IEEE*, 2010.
12. H. Kolimbris, *Digital Communications Systems*, Prentice Hall, 2000.
13. W. L. Stutzman and G. A. Thiele , *Antenna Theory and Design*, John Wiley & Sons, Inc., 1998 .
14. L. David Mech and Shannon M.Barber, "A Critique Of Wildlife Radio-Tracking And Its Use In National Parks," The U.S. National Park Service, 2002.
15. W. W. C. a. R. D. Lord, "A radio-tracking system for wild animals," *Journal of Wildlife Management*, vol. 27, p. 9–24, 1963.
16. L. D. Mech, *A Handbook Of Animal Radio-tracking*, Univ. of Minn. Press, 1983, p. 108.
17. Cederlund et al, *Radiotracking techniques and the reliability of systems used for larger birds and mammals*, Liber Tryck, Stockholm, 1979, p. 102.
18. V. B. Kuechle, "State of the art of biotelemetry in North America," in *Telemetric Studies of Vertebrates*, London, U.K, Academic Press, 1982, pp. 1-18.

19. Fabian Körner et al, "Autonomous Airborne Wildlife Tracking Using Radio Signal Strength," *IEEE, International Conference on International Conference on*, October 2010.
20. M. H. C. Dias, "Path Loss Measurements of HF/VHF Land Links in a Brazilian Atlantic Rainforest Urban Site," *IEEE ANTENNAS AND WIRELESS PROPAGATION LETTERS*, vol. 10, 2011.
21. M. A. K. Melo, "On the Use of Tamir's Model for Site-Specific Path Loss Prediction of HF/VHF Systems in Forests," *IEEE*, 2011.
22. F. Christine, "SOP 13.4 - Ground-based radio-tracking," August 2009. [Online]. Available: [www.dec.wa.gov.au](http://www.dec.wa.gov.au).
23. C. Veness, 2002-2012 . [Online]. Available: <http://www.movable-type.co.uk/scripts/latlong.html>.
24. T. S. Rappaport, *Wireless Communications: Principles and Practice*, IEEE Press - Prentice-Hall PTR , 1996.
25. C. M. Horwitz, "Optimization of Radio Tracking Frequencies," *IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION*, Vols. VOL. AP-21, no. NO. 3, MAY 1979.
26. Y.-Y. C. Y.-T. H. P.-Y. L. Y.-C. C. Y.-F. L. S.-C. Y. Jyh-How Huang, "Rapid Prototyping for Wildlife and Ecological Monitoring," *IEEE SYSTEMS JOURNAL*, vol. 4, p. 2, 2010.
27. W. S. Seegar, "JOHNS HOPKINS APL TECHNICAL DIGEST,," *Fifteen years of satellite tracking development and application to wildlife research and conservation*, vol. 17, 1996.