

DESIGN AND SIMULATION OF LOW POWER CONSUMPTION POLYMERIC
BASED MMI THERMO-OPTIC SWITCH

NORIDAH MOHD RIDZUAN

A project report submitted in partial
fulfillment of the requirements for the award of the
Degree of Master of Engineering (Electrical)

Faculty of Electrical & Electronic Engineering
Universiti Tun Hussein Onn Malaysia

FEBRUARY 2013



PTT AUTHM
PERPUSTAKAAN TUNKU TUN AMINAH

ABSTRACT

In optical communication system, optical cross connect devices particularly an optical switch has become the main attraction for research due to its ability to route optical data signals without the need for conversion to electrical signals. Thus, it is important to develop optical devices such as optical switch with low power consumption and crosstalk for Wavelength Division Multiplexing (WDM) lightwave communication system. This project aims towards the design and simulation work of a polymeric based thermo-optic switch using Multimode Interference (MMI) structure to achieve low switching power capability and reduce crosstalk figure. The optical switch is designed on the 2x2 MMI cross coupler architecture of optical switch based on the general interference mechanism. Light propagation and thermal distribution through the optical switch is modeled using Finite Difference Beam Propagation Method (FD-BPM). Photosensitive SU-8 epoxy polymeric based waveguide material at core layers with PMGI at upper and lower cladding layer were chosen due to its low thermal conductivity and high thermo-optic coefficient. Further analysis has been performed by exploring the effect of heater's structure and its placement in order to reduce switching power. It is observed that by applying well-designed of heater's structure and suitable placement of heater, low power consumption as low as 9.05 mW with crosstalk level of -36.52 dB can be achieved.



ABSTRAK

Di dalam sistem perhubungan optik, peranti perhubungan silang optik seperti suis optik menjadi tarikan utama dalam bidang penyelidikan kerana kebolehannya menghalakan isyarat data optik dari masukan ke keluaran yang dikehendaki tanpa perlu melibatkan penukaran ke isyarat elektrik. Sehubungan itu, adalah penting untuk membina satu peranti optik seperti suis optik yang mempunyai penggunaan kuasa pensuisan dan cakap silang yang rendah dalam multipleks pembahagi panjang gelombang (WDM) bagi sistem perhubungan gelombang cahaya. Projek ini bermatlamat untuk mereka bentuk dan membuat simulasi suis optik berasaskan bahan jenis polimer melalui kaedah kesan kawalan haba dan menggunakan struktur pengganding gangguan berbilang mod (MMI) bagi mencapai penggunaan kuasa pensuisan yang rendah serta mampu mengurangkan kadar cakap silang. Suis optik ini direka bentuk di atas senibina 2x2 pengganding silang MMI berasaskan mekanisma gangguan umum. Perambatan cahaya dan taburan haba menerusi suis optik telah dimodelkan menggunakan kaedah perbezaan terhingga-perambatan alur (FD-BPM). Bahan pandu gelombang yang berasaskan polimer peka cahaya, SU-8 epoxy di lapisan teras manakala PMGI di lapisan pelindung atas dan bawah dipilih bersesuaian dengan kekonduksian habanya yang rendah dan pekali termalnya yang tinggi. Analisis lebih lanjut telah dibuat dengan mengkaji kesan struktur pemanas dan kedudukannya bagi mengurangkan kuasa pensuisan. Dapat diperhatikan bahawa melalui penggunaan rekabentuk struktur pemanas yang baik dan kedudukannya yang sesuai, penggunaan kuasa serendah 9.05 mW dengan cakap silang -36.52 dB dapat dicapai.

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	TITLE	i
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENTS	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	x
	LIST OF FIGURES	xi
	LIST OF ABBREVIATIONS	xiii
	LIST OF SYMBOLS	xiv
	LIST OF APPENDICES	xvi
1	INTRODUCTION	
	1.1 Background of Project	1
	1.2 Problem Statement	6
	1.3 Objective of the Project	6
	1.4 Scope of the Project	7
	1.5 Project Methodology	7
	1.6 Project Outline	10



2 OPTICAL WAVEGUIDE THEORY

2.1	Introduction	11
2.2	Basic configuration of optical waveguide	11
2.3	Planar Slab Optical Waveguide	13
2.4	Channel Optical Waveguide	15
2.5	Wave equation in optical waveguide	15
2.6	Effective Index Method (EIM)	18
2.7	Finite Difference Method (FDM)	19
2.8	Beam Propagation Method (BPM)	20
2.9	Previous works of MMI Thermo-optic switch	21
2.10	Conclusion	26

3 MULTIMODE INTERFERENCE THEORY AND THERMAL ANALYSIS

3.1	Introduction	27
3.2	Multimode Waveguide	28
3.3	Self-imaging Principle	30
3.3.1	General Interference	33
3.3.2	Restricted Interference	34
3.3.2.1	Paired Interference	34
3.3.2.2	Symmetric Interference	35
3.4	Thermo-optic Effect	36
3.5	Heat Transfer	37
3.6	Induced Temperature Distribution	38
3.7	Induced Refractive Index Change	40
3.8	Conclusion	41



4 DESIGN AND SIMULATION OF POLYMERIC BASED MULTIMODE INTERFERENCE THERMO-OPTIC SWITCH

4.1	Introduction	42
4.2	Design of Single Mode Waveguide	43
4.3	Design of Multimode Interference Cross Coupler	44
4.4	Design of Heater Electrode	50
	4.4.1 Heater Electrode	52
	4.4.2 Heater Optimization	54
4.5	Conclusion	57

5 CONCLUSION AND FUTURE WORK

5.1	Conclusion	58
5.2	Recommendation for Future Works	59

REFERENCES

60

APPENDICES A-B

65

VITA

68



PTTA UTHM
PERPUSTAKAAN TUNKU TUN AMINAH

LIST OF TABLES

TABLE NO.	TITLE	PAGE
1.1	Summarization of published optical switch	4
4.1	Refractive indices of material used in the switch design	43
4.2	Optical power at Pout bar	46
4.3	Optical power at Pout cross	46
4.4	Measured crosstalk of optical switch	47
4.5	Thermal properties of material used in the proposed MMI optical switch	51
4.6	TO MMI switch with a straight heating electrode result simulation and measured crosstalk	55



PTTAUTHM
PERPUSTAKAAN TUNKU TUN AMINAH

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	Project methodology flow chart	9
2.1	Basic optical waveguide structure	12
2.2	Layers in planar slab optical waveguide	12
2.3	-x and -y view for the most common geometries for channel waveguide (a) Buried channel waveguide (b) Strip-loaded waveguide (c) Ridge waveguide (d) Rib waveguide	13
2.4	Planar slab optical waveguide structure and guiding layer (a) Symmetric dielectric waveguide (b) Wave propagation in planar slab waveguide	13
2.5	Effective index method diagram	18
2.6	Schematic of the MMI optical switch	22
2.7	Schematic diagram of the MMI based optical switch	23
2.8	Schematic diagram of the MMI-MZI switch	25
3.1	Cross section view of multimode waveguide structure	29
3.2	(a) Slab optical waveguide (b) Characteristic of step-index waveguide	30
3.3	Waveguide cross section with heat source	38
4.1	Cross section of the MMI based cross coupler	44
4.2	Layout of the MMI cross coupler	44
4.3	Configuration of the TO MMI switch	45
4.4	Crosstalk versus MMI cross coupler width for various MMI cross coupler length	47



PTTA UTHM
PERPUSTAKAAN TUNKU TUN AMINAH

4.5	Design of MMI cross coupler in multi-pane mode	48
4.6	Layout 3D of the MMI cross coupler in BeamProp	48
4.7	The computed index profile at $Z=0$	49
4.8	The computed index profile at $Z=700$	49
4.9	BPM analysis for operation of MMI cross coupler	50
4.10	Configuration of the TO MMI switch with a straight heating electrode.	52
4.11	Cross section of the TO MMI switch with a straight heating electrode	53
4.12	Design of MMI cross coupler with heater electrode in multi-pane mode	53
4.13	Temperature distribution plot for straight heater analysis when power applied is 9.05mW.	54
4.14	Crosstalk versus the several strip width of straight heater electrode	55
4.15	Driving power versus the several strip width of straight heater electrode	56
1-A	Division of the solution region into grid point for finite difference calculation.	65
2-B	A finite element subdivision in solution region	67



PTTA UTHM
 PERPUSTAKAAN TUNJUKU AMINAH

LIST OF ABBREVIATIONS

TEM	-	Transverse electromagnetic
TE	-	Transverse electric
TM	-	Transverse magnetic
MMI	-	Multimode interference
WDM	-	Wavelength division multiplexing
MPA	-	Mode propagation analysis
TO	-	Thermo-optic
FDM	-	Finite difference method
FEM	-	Finite element method
DC	-	Directional coupler
MZI	-	Mach-Zehnder interferometer
CT	-	Crosstalk
IL	-	Insertion loss
ER	-	Extinction ratio
EIM	-	Effective index method
BPM	-	Beam propagation method



PTTA UTHM
PERPUSTAKAAN TUNKU TUN AMINAH

LIST OF SYMBOLS

SYMBOLS	DESCRIPTION
R	- Resistance
E	- Electric field
H	- Magnetic field
J	- Current density
ρ	- Charge density
σ	- Conductivity
D	- Electric flux density
B	- Magnetic flux density
ϵ	- Dielectric permittivity of the medium
μ	- Magnetic permeability of the medium
n	- Refractive index
λ	- Wavelength
k	- Wave number of a medium
N	- Effective index of the mode
β	- Wave propagation constant
ω	- Angular frequency
v	- Wave velocity
ν	- Mode number
T	- Waveguide thickness
L_{π}	- Beat length of the two lowest-order modes
c_v	- Field excitation coefficient
$E(y,z)$	- Field profile
L_{MMI}	- Multimode waveguide length



PTT ALU THM
PERPUSTAKAAN TUNJUKU AMINAH

W_{MMI}	-	Multimode waveguide width
p	-	Periodic number of the imaging along the multimode waveguide
\dot{Q}'''	-	Distributed thermal source per unit volume
C	-	Specific heat
t	-	Time
k	-	Thermal conductivity
P	-	Supply power
w	-	Heater width
h	-	Heater length
I	-	Current through the heater electrode
dn/dT	-	Thermo-optic coefficient
Δn	-	Refractive index difference
ΔT	-	Temperature rise



LIST OF APPENDICES

APPENDIX	TITLE	PAGE
A	Finite Difference Method (FDM)	61
B	Finite Element Method (FEM)	63



PTTA UTHM
PERPUSTAKAAN TUNKU TUN AMINAH

CHAPTER 1

INTRODUCTION

1.1 Background of Project

As developments in optical fiber communications and integrated optical electronics scale up, the popularity for research work in this area increased as well. The enhancement in telecommunication system leads to the demand for increasing bandwidth capacity. Besides that, the world needs telecommunications system that can fit on the flexibility and re-configurability. Therefore, the implementation of optical communication system as a medium to transmit data signal has become major concern in telecommunication field due to its remarkable advantages on the performance.

The transmission and processing of signals carried by optical beams has been a topic of great interest since the early 1960s, when the development of first laser provided a stable source of coherent light for such application. Thus, the concept of integrated optics emerged in which the conventional electric integrated circuits are replaced by the Photonic Integrated Circuits (PIC). Photonics Integrated Circuit (PIC) has its own significant advantages such as low power consumption, low transmission loss, higher bandwidth and immunity to electromagnetic interference.



PTTA UTHM
PERPUSTAKAAN TUN ABDUL RAZAK

Consequently, the field step forward onto the development of semiconductor optical devices which permitted very efficient and compact optoelectronic devices. These developments yield a rich variety of passive or active components such as optical splitters, optical coupler, variable optical attenuator, waveguide cross-couplers, optical switches and modulators.

In order to accomplish the current world demand, Wavelength Division Multiplexing (WDM) system which multiplexes multiple optical carrier signals on a single optical fiber by using different wavelength was introduced. In the WDM systems, signal routing and coupling devices such as optical switch are required to obtain large bandwidth.

Therefore, high speed and high capacity optical switch are crucially needed in current optical networks system. For this, it is necessary to research for good and tolerable performances of optical switch. Furthermore, it is important to develop optical devices that have low power consumption and crosstalk.

There are various optical switching technologies available today, such as Micro Electromechanical System (MEMs) (Dobbelaere et al., 2002, Leow et al., 2004), Electro optic switch (Lee et al., 2005, Wang et al., 2004 and Xiao et al., 2009), Thermo optic switch which originates from the temperature dependency of material's refractive index (Keil et al., 1996, Wu et al., 2006 and Al-Hetar et al., 2008) and Liquid Crystal Switch (Papadimitriou, 2003, Vazquez et al., 2003 and Shih et al., 2009). Thermo optic effects are one of the tuning effects that can change the refractive indices and modulate the propagation of light. Compared with electro optic effect, thermo optic effect is simpler and more flexible. Besides that, thermo optic effect can be found in all transparent materials (Nishihara et al., 1989)

There are also several types of structure for optical switch which have been developed such as Directional coupler (DC) based switch (Supa'at, 2004, Beggs et al., 2009), Mach-Zehnder interferometer (MZI) based switch (Inoue et al., 1992, Wong et

al., 2005), Y-branch based switch (Yeo et al., 2006), multimode interference (MMI) based switch (Wang et al., 2006, Al-Hetar et al., 2008, Yin, 2008 and Jia et al., 2007) and combination of MMI-MZI based switch. Among these technologies, an MMI based switch has its own popularity due to their excellent performance and more than that, MMI structure is the most fabrication tolerance device. In addition, MMI devices owing to its advantages such as ultra-compact size, low loss and polarization insensitive (Soldano and Penning, 1995). In this work, MMI optical switch based on thermo-optic (TO) control is proposed due to its simplicity and flexibility.

Material research for optoelectronic application has been started extensively few decades back since there is great demand for components that meet performance criteria as well as economic requirements. Few materials with different advantages have been explored and used for the fabrication of optical waveguides, as well as the integrated components. These materials include III-V compound semiconductors, silica, LiNbO₃, sol-gel material and polymer. These materials have their own advantages and disadvantages as compared to their counterpart. For example, the III-V semiconductors are unique in monolithic integration among waveguides, light sources and detectors. However, the complexity of fabrication due to high cost of III-V growth technology, high fiber to chip coupling and waveguide loss are present challenges for its practical applications in OEICs. Polymeric materials in other hand have been extensively being used in optical switch development due to the potential of added optical functionality and able to be produce at low cost (Yao et al., 2002). Furthermore, polymeric devices have a potential of integrating multifunctional devices and cost effective mass production (Hida et al., 1993). It is believed that the combination of suitable material like polymer and superior type of structure like MMI structure will definitely lead to low power consumption and low crosstalk value. A review on published optical switches is listed in Table 1.1.



Table 1.1 Summarization of published optical switch

Switch Configuration	Port N X M	Material	Technology	Power/ Voltage/ Current	CT (dB)	Switching Time	IL (dB)
MMI (Wu <i>et al.</i> , 2006)	1×2	Sol-gel	Thermo-optic	84 mW	-	-	-
MMI (Wang <i>et al.</i> ,2006)	1×2	Polymer	Thermo-optic	22 mW	-20	4 ms	-
MMI-MZI (Gao <i>et al.</i> ,2009)	2×2	Polymer	Thermo-optic	7.5 mW	-37	400 μ s	-
MMI (Yin <i>et al.</i> , 2008)	1×2	GaAs/AlGaAs	Thermo-optic	110 mA	-33	-	-
MMI (Xie <i>et al.</i> ,2009)	2×2	Polymer	Thermo-optic	8.9 mW	-23	-	10
MMI-MZI (Al-hetar <i>et al.</i> ,2011)	2×2	Polymer	Thermo-optic	1.85 mW	-28.6	0.7 ms	0.88
MZI-MMI (Xia <i>et al.</i> , 2004)	2×2	Silicon on insulator	Thermo-optic	235 mW	-	60 μ s	12
MZI-MMI (Lai <i>et al.</i> , 1998)	2×2	Silica	Thermo- optic	110 mW	-	150 μ s	1

Switch Configuration	Port N X M	Material	Technology	Power/ Voltage/ Current	CT (dB)	Switching Time	IL (dB)
MMI (May-Arrijoja <i>et al.</i> ,2006)	2×2	InGaAsP	Electro-optic	-	-20	-	-
Y-branch (Yeo <i>et al.</i> , 2006)	1×2	Hybrid polymer-silica	Thermo-optic	70 mW	-35	-	-
MZI-MMI (Liu <i>et al.</i> ,2005)	2×2	Silicon on insulator	Thermo-optic	145 mW	-	8 ± 1 μs	-
MZI with 3 dB DC (Sohma <i>et al.</i> , 2002)	2×2	Silica	Thermo-optic	45 mW	-	3 ms	-
MMI (Nagai <i>et al.</i> , 2002)	2×2	InGaAsP	Electro-optic	-	-13	-	-

Notes:

CT – Crosstalk

IL – Insertion loss

N – Number of input port

M – Number of output port

1.2 Problem statement

Optical switches are crucial components in optical networks. The ability to reconfigure optical switches with low power consumption has become a significant issue and is highly desirable. Furthermore switches with a small footprint are important for space, satellite and flight based applications. Therefore, the employment of Multimode Interference (MMI) thermo-optic switch in integrated optical circuit are required since they offer small size, robustness, good power balance, low polarization sensitivity, low insertion loss and ease of fabrication. In this project, the effect of single heater electrodes in terms of structure and placement will be analyzed to achieve low switching power consumption and crosstalk.

1.3 Objective of the project

This project aims to design a polymeric based thermal-optical switch using Multimode Interference (MMI) structure to achieve low switching power capability and reduce crosstalk figure. The optical switch will be designed on the 2x2 MMI cross coupler architecture of optical switch based on the general interference mechanism. The research objectives can be specified as follows:

1. To design a 2×2 MMI cross coupler as basic architecture of optical switch.
2. To implement a polymer based thermo-optic (TO) effect in designing MMI optical switch.
3. To investigate the effect of heater electrode in terms of structure and placement towards power consumption and crosstalk.

1.4 Scope of the project

In order to realize the research objectives which have been stated in previous sub section, the corresponding works to be carried out in this research have been identified as follows:

1. Design and optimization of MMI waveguide structure and dimension.
2. Design and optimization of heater electrode to the waveguide in terms of size and position to determine the optimum heater design for low switching power and crosstalk.

1.5 Project Methodology

This research begins with literature studies on MMI effect. The operation of optical MMI device is based on self-imaging effect principle. According to the self-imaging effect principle, an input field in a multimode waveguide is reproduced at periodic intervals along that waveguide. There are two types of interference mechanism, which are general interference and restricted interference. The restricted interference can be further divided into paired interference and symmetric interference. The optical switch in this project will be designed based on the general interference mechanism. Literature studies also included waveguide modeling techniques which are finite difference method (FDM), effective index method (EIM) and beam propagation method (BPM). These methods are adopted in solving the wave equation.

In order to develop MMI optical switch, a cross coupler has been adopted as the basic architecture of switch structure. The simulation work will be based on BeamProp™ platform for a single design with multiple width and length combination of cross coupler. Further refinement on the proposed MMI optical switch will be required

in order to obtain a cross coupler structure with high extinction ratio, low insertion loss and polarization-insensitive.

The following phase of the project will be on the studies of thermo-optic (TO) effect. This phase is required to understand the relationship of the parameters that governing the functionality of the device. Thus, heat distribution in the optical waveguides can be obtained and eventually, better placement of heater electrodes can be designed in order to ensure excellent performance of the optical switch.

The crucial step in this project is to determine placement of the heater electrodes. It was found that optical switch with low power consumption can be achieved by considering the size, shape and number of the heating electrode, as well as the distance between heating electrode and core layer. In order to achieve the design objectives, which are low power consumption and wide attenuation range, further simulation will be based on BeamProp software from RSoft® due to its versatility. From the simulation result, analysis will be carried out to obtain low switching power capability and low crosstalk. The final stage of this project is thesis writing which include the findings, results and discussion. The methodology of this work is summarized in the following flow chart.



PTIA UTHM
PERPUSTAKAAN TUNJUKU TUN AMINAH

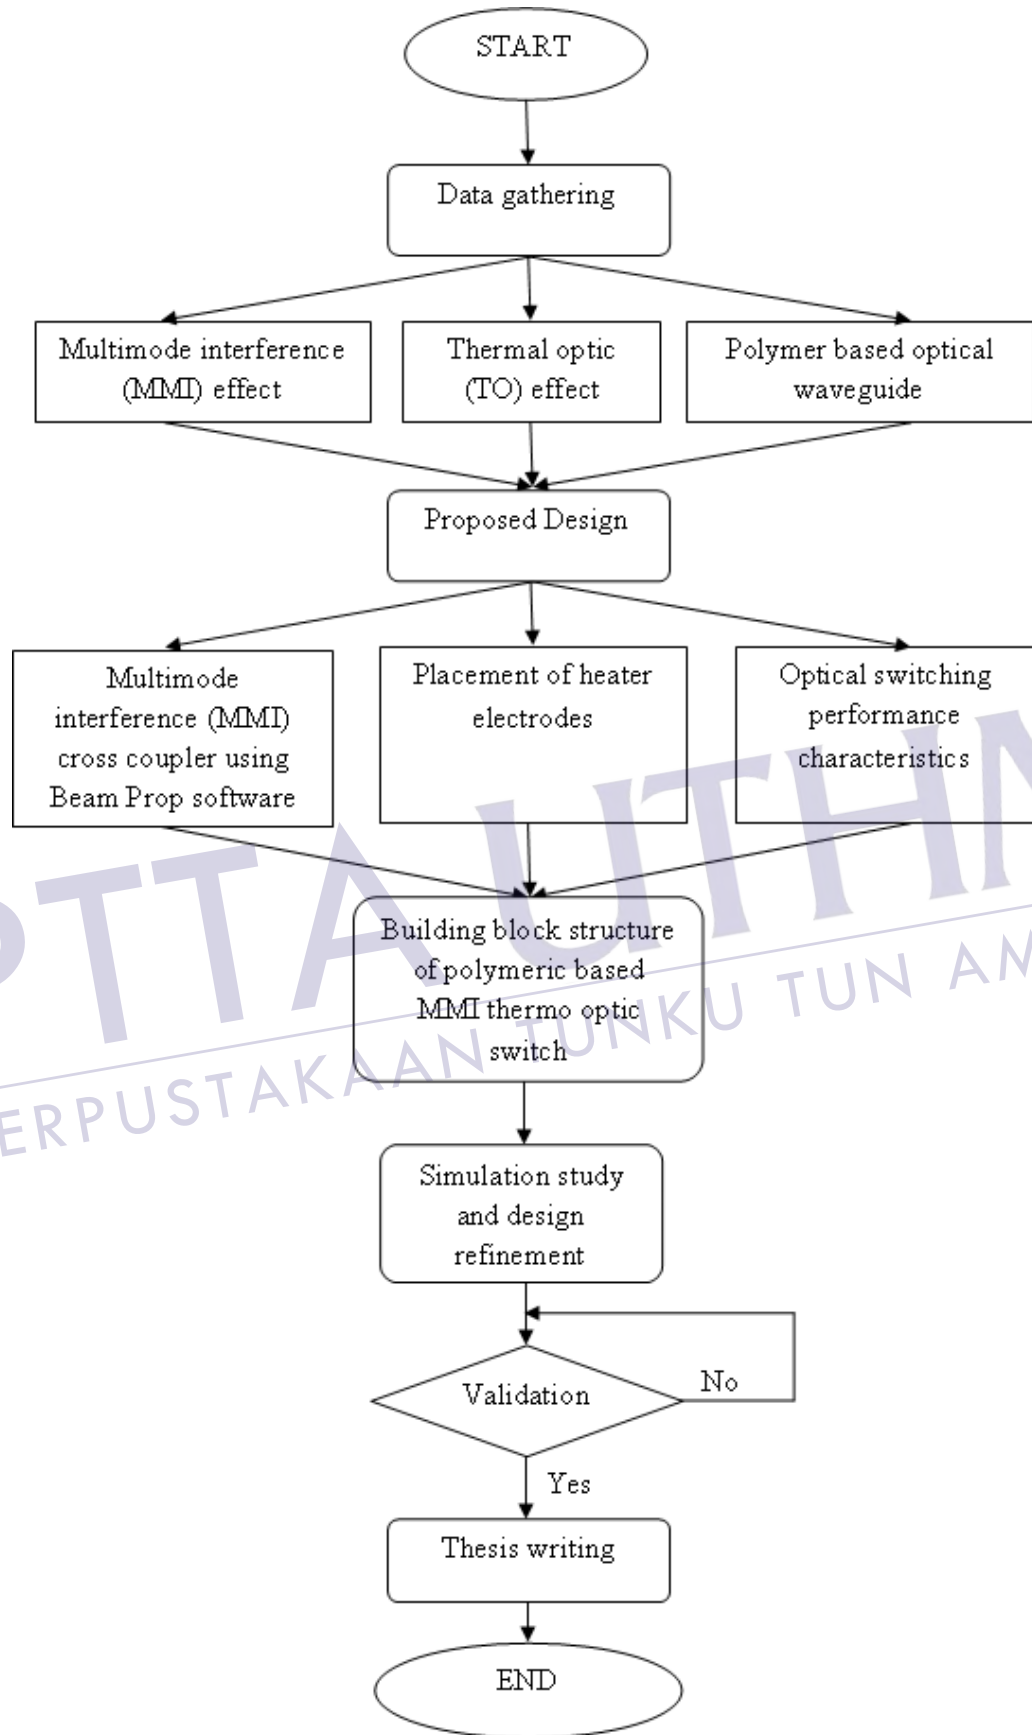


Figure 1.1 Project methodology flow chart

1.6 Project outline

Chapter 1 presents an introduction of optical devices development in optical communication networking. The objective and the scope of this research study are presented as well.

Chapter 2 discusses the main principles of optical waveguide theory. The general wave equation which describes the propagation of light in the optical waveguide is derived using Maxwell's equation. The eigenvalue function for slab waveguide has been obtained using the ray-optics approach. The modeling techniques of channel waveguides have been discussed in detail, which include, the Effective Index Method, Finite Difference Method and Beam Propagation Method.

Chapter 3 explains the multimode interference (MMI) theory which is based on self-imaging principle. Classification on imaging mechanism into general interference and restricted interference has been explained in detail. The mathematical formulations that differentiate the properties of these interference mechanisms are briefly described. This chapter also covers the thermal analysis which is the fundamental aspect in designing the optimum heater structure. The temperature profiles of thermo-optic (TO) waveguides are analyzed by Finite Difference Method (FDM) and Finite Element Method (FEM).


Chapter 4 emphasizes on the simulation and optimization of the MMI TO switch. The optimization step starts from optimizing the MMI cross coupler. In order to design a TO switch and further analysis on heater's structure, the simulation was performed by employing BeamProp software from RSoft® due to its versatility.

Chapter 5 remarks the overall conclusions research contributions of this project and discuss possibilities for further development of this work.

CHAPTER 2

OPTICAL WAVEGUIDE THEORY

2.1 Introduction



This chapter presents the fundamental and the brief concepts of optical waveguide theory and techniques applied. The optical waveguide are defined using the electromagnetic theory of light from Maxwell's equation while the techniques that have been employed for optical waveguide modeling are based on Effective Index Method (EIM), Finite Different Method (FDM) and Beam Propagation Method (BPM).

2.2 Basic configuration of optical waveguide

Optical waveguide is a basic structure for confinement and transmission of light which light is guided into a specific direction.

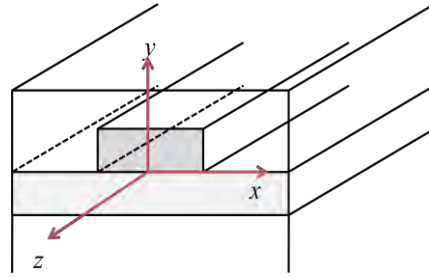


Figure 2.1 Basic optical waveguide structures (Koshibu, 1992)

Figure 2.1 shows the basic structure of optical waveguide, where the thin film has higher refractive index than either substrate or the upper cladding. Basically, there are two basic configurations of optical waveguide which are planar slab optical waveguide and channel optical waveguide.

Planar slab optical waveguide or 2-dimensional (2D) optical waveguide has optical confinement in only one transverse direction of thickness ($-y$ direction) in the thin film. On the other hand, channel optical waveguide or 3-dimensional (3D) optical waveguide allow the light propagate in both direction ($-x$ and $-y$ direction).

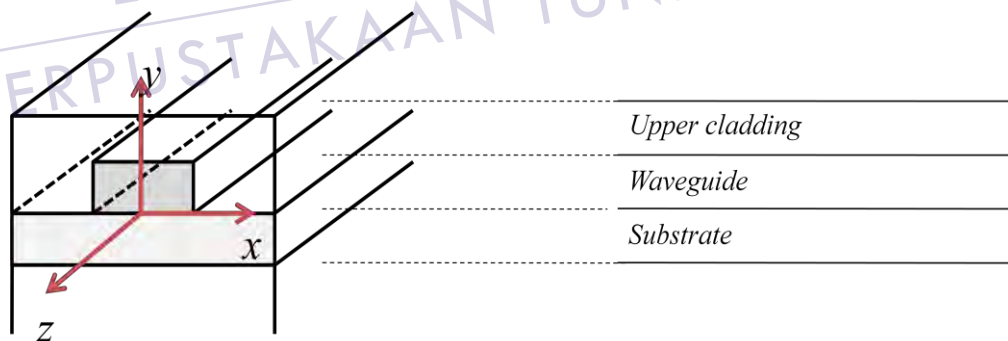


Figure 2.2 Layers in planar slab optical waveguide (Koshibu, 1992)

Figure 2.2 shows the planar slab optical waveguide layer. The optical waveguide is called symmetric if the upper clad and substrate layer materials have the same refractive index. Otherwise the waveguide is called asymmetric optical waveguide. Further analysis on planar slab optical waveguide will be explained in Section 2.3.

Figure 2.3 below shows $-x$ and $-y$ view for the most common geometries for channel optical waveguide. Channel optical waveguide structures are usually analyzed with the approximate technique namely; *Effective Index Method (EIM)* which will be described further in Section 2.4.

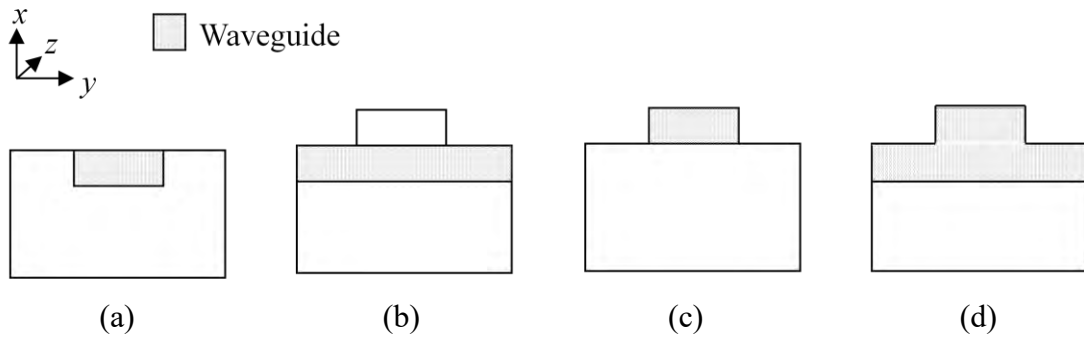


Figure 2.3 $-x$ and $-y$ view for the most common geometries for channel waveguide

- (a) Buried channel waveguide (b) Strip-loaded waveguide (c) Ridge waveguide
(d) Rib waveguide (Zappe, 1995).

2.3 Planar Slab Optical Waveguide

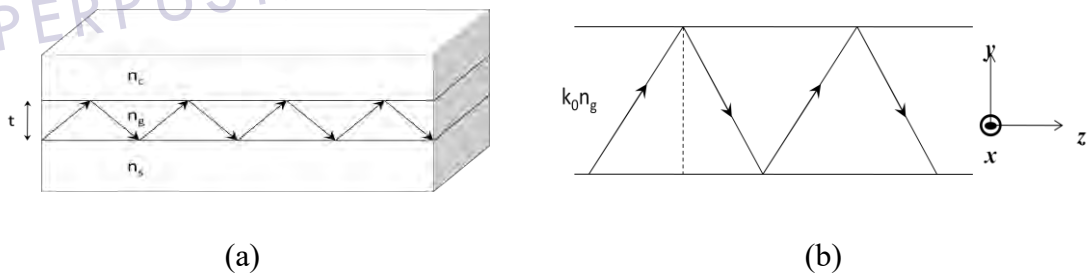


Figure 2.4 Planar slab optical waveguide structure and guiding layer

- (a) Symmetric dielectric waveguide (b) Wave propagation in planar slab waveguide
(Reed G. T. and Knight A. P., 2004)

Figure 2.4(a) shows the planar slab optical waveguide structure where the waveguide layer (or core layer) has a refractive index n_g , the lower cladding layer n_s and the upper cladding layer is n_c .

In order to obtain the mode propagation, the total internal reflection (TIR) is required and for this it needs any angle greater than critical angle, θ_c . For the two borders, θ_c are;

$$\theta_{c(\text{substrate})} = \sin^{-1} \left(\frac{n_s}{n_g} \right) \quad (2.1 -a)$$

$$\theta_{c(\text{upper})} = \sin^{-1} \left(\frac{n_c}{n_g} \right) \quad (2.1 -b)$$

Thus, the propagation can be described as the direction of wavenormal where the waves propagate along the z -direction with wavevector k where $k = k_0 n_l$ as illustrated in Figure 2.4 (b). The wavevector k can be divide in y direction and z direction component particularly which gives;

$$k_z = n_g k_0 \sin \theta_1 \quad (2.2 -a)$$

$$k_y = n_g k_0 \cos \theta_1 \quad (2.2 -b)$$

As can be seen above, the wavevector in z direction indicate the rate at which the wave propagates. The wavevector k_z is frequently replaced by the variable β . By defining the effective refractive index of the mode is N , thus gives;

$$N = n_g \sin \theta_1 \quad (2.3)$$

Therefore the equation (2.2-a) becomes;

$$k_z = \beta = N k_0 \quad (2.4)$$

The guided modes that propagate along the z direction without „zig-zag“ back and forth with refractive index, N make the corresponding range of N is

$$n_c < N < n_s \quad (2.5)$$

2.4 Channel Optical Waveguide

A channel waveguide or 3D confinement waveguide is the most practical structure for integrated optics. This type of structure allows the flexible routing of light around the waveguide surface (Zappe, 1995). Mathematical analysis has been performed in order to find the propagation constants and field profiles of all the modes in the waveguide. Nevertheless, it is complex matter to define the intended solution for channel waveguide compared with slab waveguide. Therefore, there are few methods that exist to simplify the calculations such as, Effective Index Method (Knox, 1970) and Method of Field Shadows (Zappe, 1995). The effective index method is simple and fast approach to determine the propagation constant and effective index channel (3D) waveguide (Zappe, 1995). The work conducted for this research, implement an effective index method.

2.5 Wave equation in optical waveguide

The optical waveguide are defined using wave equation which is origin from the Maxwell's equation. Maxwell's equations are set of four partial differential equations to show an electromagnetic wave. The following equations are simplified sets of Maxwell's equation (Sadiku, 2001);

$$\nabla \cdot D = \rho \quad (2.6-a)$$

$$\nabla \cdot B = 0 \quad (2.6-b)$$

$$\nabla \times E = -\frac{\partial B}{\partial t} \quad (2.6-c)$$

$$\nabla \times H = J + \frac{\partial D}{\partial t} \quad (2.6-d)$$

where,

E	=	Electric field (V/m)
H	=	Magnetic field (A/m)
ρ	=	Charge density (C/m ³)
J	=	Current density (A/cm ²)

Assuming that dielectric slab waveguide is formed from materials which are linear, isotropic and source free; the current density, J and charge density, ρ will equal to zero. In order to apply Maxwell's equation into wave equations analysis, it is necessary to specify the relations between D , E , H and B . The basic relation of electromagnetic theory for both electric and magnetic field states that;

$$B = \mu H \quad (2.7)$$

$$D = \varepsilon E \quad (2.8)$$

where ε and μ are the permittivity and permeability of the waveguide medium. Both define as;

$$\mu = \mu_R \mu_0 \quad (2.9)$$

$$\varepsilon = \varepsilon_R \varepsilon_0 \quad (2.10)$$

where,

μ_0	=	permeability of free space
μ_R	=	relative permeability of medium
ε_0	=	permittivity of free space
ε_R	=	relative permittivity of medium

In order to derive the wave equation from Maxwell's equation, take the curl of equation (2.6-c) which then gives;

$$\nabla \times \nabla \times E = -\mu \frac{\partial}{\partial t} (\nabla \times H) \quad (2.11)$$

Equation (2.11) can be rewrite by plugging into equation (2.6-d) which will express the equation as follows;

$$\nabla \times \nabla \times E = -\mu \left[\frac{\partial J}{\partial t} + \frac{\partial^2 D}{\partial t^2} \right] \quad (2.12)$$

By applying the vector identity,

$$\nabla \times \nabla \times E = \nabla(\nabla \cdot E) - \nabla^2 E \quad (2.13)$$

to the left hand-side of equation 2.12, where $\nabla \cdot E = 0$, which gives;

$$\begin{aligned} \nabla^2 E &= \nabla \times \nabla \times E \\ &= \mu \left[\frac{\partial J}{\partial t} + \frac{\partial^2 D}{\partial t^2} \right] \end{aligned} \quad (2.14)$$

By assuming the moment of $\mathbf{J} = 0$ and by substituting equation 2.8 into equation 2.14 yields the wave equation;

$$\nabla^2 E = \epsilon \mu \frac{\partial^2 E}{\partial t^2} \quad (2.15)$$

The derivation of wave equations is formulated by equation 2.15 which is required to be solved, subject to the requirements that fields decay away from the guiding region and satisfy appropriate boundary conditions at any discontinuity interface.

2.6 Effective Index Method (EIM)

Consider the channel (3D) waveguide with the rib type as shown in Figure 2.3(d). In effective index method, 3D optical waveguide is divided into region I, II and III as shown in Figure 2.5(a). Each region is then considered as 2D slab waveguide homogeneous in the y direction as shown in Figure 2.5(b). The effective index is then obtained by solving the eigenvalue function in x direction to produce N_{eff1} , N_{eff2} and N_{eff3} for region I, II and III, respectively. Using the obtained effective index, the system can be further modeled as new 2D slab waveguide homogeneous in x direction as shown in Figure 2.5(c). By solving the eigenvalue function in y direction, the final effective index, N can be obtained. The propagation constant, β can be calculated by using equation (2.4).


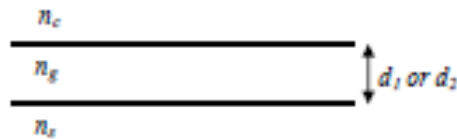
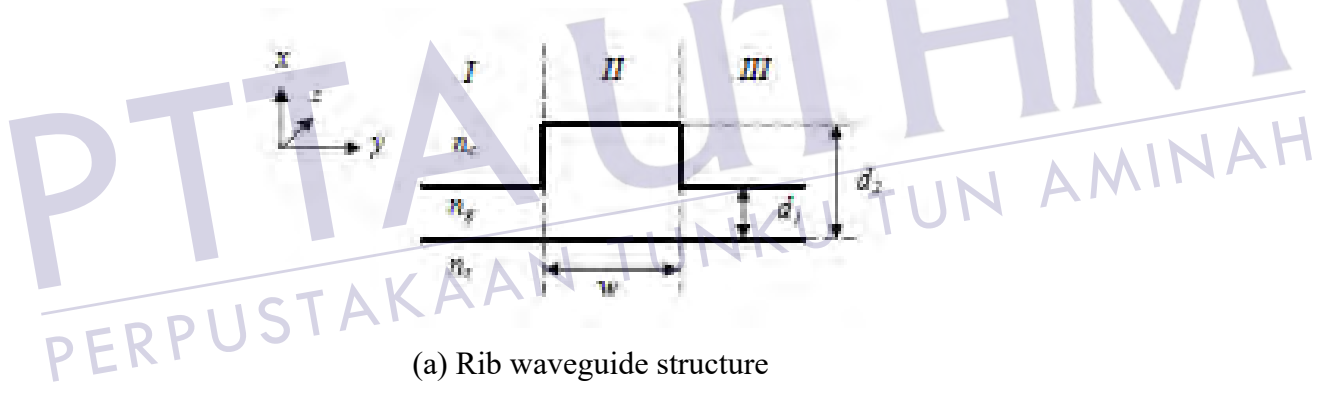


Figure 2.5 Effective index method diagram (Reed G. T. and Knight A. P., 2004)

2.7 Finite Difference Method (FDM)

Waveguide modeling can be divided into analytical and numerical technique. One of numerical technique is finite difference method (FDM). This method is popular due to its simplicity in the discretization procedure and the relative ease of implementation into a computer code. In the finite difference method, the governing equations are approximated by a point-wise discretization scheme where derivatives are replaced by difference equations that involve the value of the solution at the nodal point (Majumdar, 2005). Finite difference method illustration can be seen in Figure 1-A (Appendix A). Finite difference equation can be derived by using several approaches, which include Taylor series method or control volume method. The three point finite difference formula for the second derivatives can be state as follows:

$$\frac{d^2 E}{dx^2} = \frac{E(i+1, j) - 2E(i, j) + E(i-1, j)}{\Delta x^2} \quad (2.16)$$

By adopting equation (2.16), the scalar wave equation (2.15) can now be written in basic discretized form as (Ibrahim, 2007)

$$E(i, j) = \frac{E(i+1, j) + E(i-1, j) - 1}{2 \left(1 + \left(\frac{\Delta x^2}{\Delta y^2} \right)^2 \right) - \Delta x^2 (k_0 n^2(i, j) - \beta^2)} \quad (2.17)$$

where i and j represent the mesh point corresponding to x and y direction respectively.

If Equation (2.17) is multiplied with E and operating double integration towards x and y , the Rayleigh Quotient will be obtained (Ibrahim, 2007)

$$\beta^2 = \frac{\iint E_y \left(\left(\frac{d^2 E_y}{dx^2} + \frac{d^2 E_y}{dy^2} \right) + k_0 n^2 E_y \right) dx dy}{\iint E_y^2 dx dy} \quad (2.18)$$

Thus, the propagation constant of the mode and electric field distribution in the waveguide can then be solved using numerical method based on equation (2.18).

2.8 Beam Propagation Method (BPM)

The Beam Propagation Method (BPM) has been one of the most popular methods used in the modeling and simulation of electromagnetic wave propagation in dielectric waveguide. The advantages of BPM methods are (Baets *et al.*, 1990);

- (a) Optical field can be propagated over a large distance (thousands of wavelengths) with negligibly small errors,
- (b) The computer code is simple and can be adapted to more complex simulation problem

Then considering the 3-D scalar wave equation;

$$\frac{\delta^2 E}{\delta x^2} + \frac{\delta^2 E}{\delta y^2} + \frac{\delta^2 E}{\delta z^2} + k^2 n^2(x, y, z) E = 0 \quad (2.19)$$

The TE field will then separated into two parts; the axially slowly varying envelope term of $\Phi(x, y, z)$ and another one is the rapidly varying term of $\exp(-jk_0 z)$. Thus $E(x, y, z)$ can be expressed by,

$$E(x, y, z) = \Phi(x, y, z) \exp(-jk_0 z) \quad (2.20)$$

By substituting equation (2.20) in equation (2.19) gives;

$$\nabla^2 \Phi - j2kn_0 \frac{\delta \Phi}{\delta z} + k^2(n^2 - n_0^2)\Phi = 0$$

where;

$$\nabla^2 = \frac{\delta^2}{\delta x^2} + \frac{\delta^2}{\delta y^2} \quad (2.21)$$

Assume the weakly guiding condition, we can approximate $(n^2 - n_0^2) \approx 2n_0(n - n_0)$, in equation 2.21, that would result the equation to be as follows;

$$\frac{\delta \Phi}{\delta z} = -j \frac{1}{2kn_0} \nabla^2 \Phi - jk(n - n_0)\Phi \quad (2.22)$$

When $n=n_0$, the first term will remain in right hand side of the above equation. Therefore, it is known that the first term of equation 2.22 represents free space propagation in the medium have refractive index of n_0 . While the second term of 2.22 represents the guiding function or influence of the region having refractive index $n(x,y,z)$. Both side of equation 2.22 affect the light propagation simultaneously. In spite of this, for BPM analysis, the two terms are assumed can be separated and that each term affects the light propagation separately and alternately in the axially small distance in z -direction (Feit *et al*, 1978).

2.9 Previous works of MMI Thermo-optic switch

There is increasing work for optical switch design due to its demand for low power consumption and crosstalk figure. Xie *et al.* (2009) demonstrates a compact, very low power consumption, and low crosstalk of multimode interference 2x2 coupler-based polymer thermo-optic photonic switch.

The fabricated thin-film small-area heater confirmed the simulation results with operating power consumption as low as 8.9 mW. The switching crosstalk obtained was less than -23 dB.

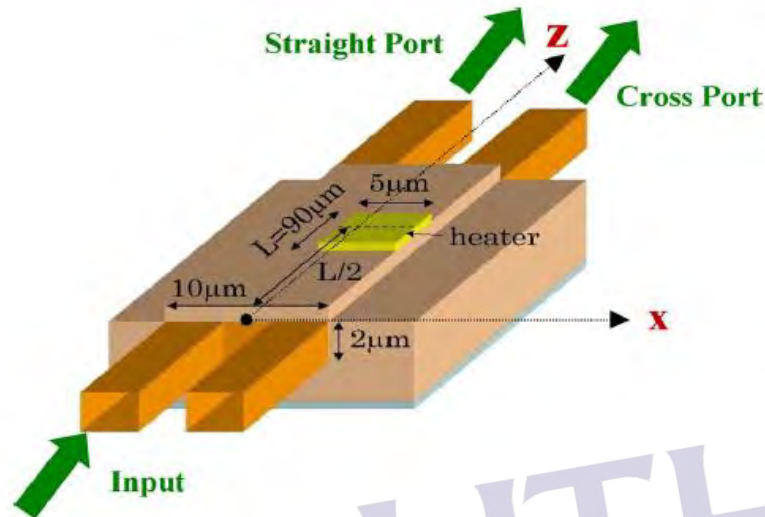


Figure 2.6 Schematic of the MMI optical switch (Xie *et al.*, 2009)

The polymer switch consists of thin polymer core/cladding layers, commercially available standard SU-8 epoxy/polymethyl-glutarimide (PMGI), coated on top of Si substrate with a thin-film heater placed above the device. The polymer refractive indexes are 1.575 and 1.480, respectively, at a wavelength of 1550 nm. A schematic structure of the MMI polymer switch is illustrated in Figure 2.6.

An optical switch based on the multimode interference (MMI) coupler is also demonstrated by Wang *et al.* (2006). The device is designed and fabricated on polymeric materials. Thermo-optic (TO) effect of polymers with negative TO coefficient is employed to change the self-imaging effect of a side-heated MMI coupler and realize optical switching.

The polymeric materials used in the experiments are ZPU series from Zen Photonics, Inc. The refractive index of the polymers used for the core and cladding are 1.464 and 1.459, respectively. The size of the single-mode channel waveguide is $7 \times 7 \mu\text{m}^2$. The width and length of the MMI region are $48 \mu\text{m}$ and 3.6 mm , respectively. To realize the $250\text{-}\mu\text{m}$ separation at the input–output ends of the device chip, bends are designed in the input–output access sections, as shown in Figure 2.7.

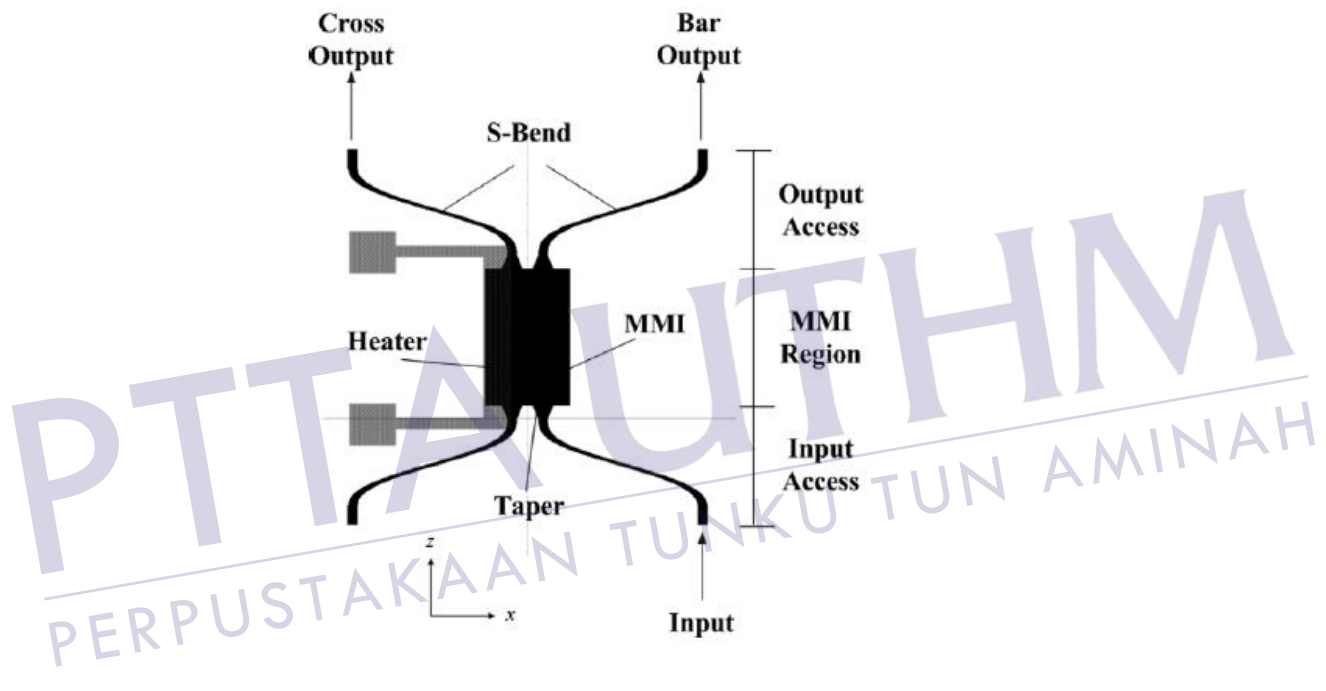


Figure 2.7 Schematic diagram of the MMI based optical switch (Wang *et al.*, 2006)

A glass wafer is used as the substrate. After a $20\text{-}\mu\text{m}$ -thick polymer film is coated on the substrate as the lower cladding layer, a $7\text{-}\mu\text{m}$ -thick film is spun, patterned and then etched to form the core structure of the component, which is then coated by an upper cladding layer with a thickness of $15 \mu\text{m}$. The switching power is about 22 mW and the measured crosstalk is about -20 dB .

The 2x2 MMI-MZI polymer thermo-optic switch in a high refractive index contrast (0.102) with a new structure design is realized by Al-hetar *et al.* (2011). A strongly guiding ridge waveguide with deep etching in the lower cladding has been used. In addition, ridge silicon is extended from the silicon substrate to the lower cladding and between heater electrodes. The main purpose behind this change in substrate layer is to localize the heating at a heated region and limit the heat diffusion elsewhere.

The experimental results show that the 2x2 MMI-MZI polymer thermo-optic switch has low switching power of less than 1.85 mW, a crosstalk at two states of less than -28.6 dB. The core and cladding are ZPU12-480 and LRF378 with their refractive indexes are 1.48 and 1.378, respectively at a wavelength of 1550 nm. Figure 2.8 shows the structural schematic of 2x2 MMI-MZI thermo-optic switch that has been proposed.



PTTA UTHM
PERPUSTAKAAN TUNKU TUN AMINAH

REFERENCES

- Al-hetar A.M., Yulianti I., Supa'at A.S.M., Mohammad A.B. (2008). Thermo-optic Multimode Interference Switch With Air And Silicon Trenches. *Optics Communication*, 281: 4653-4657.
- Al-hetar A.M., Mohammad A.B., Supa'at A.S.M., Shamsan Z.A., (2011). MMI-MZI Polymer Thermo-Optic Switch With a High Refractive Index Contrast. *Journal of Lightwave Technology*, Vol. 29, No. 2: 171-178
- Besse P.A., Bachmann M., Melchior H., Soldano L. B., Smit M. K., (1994). Optical Bandwidth and Fabrication Tolerance of Multimode Interference Couplers. *Journal of Lightwave Technology*. Vol.12, No.6: 1004-1009.
- Bryngdahl, O. (1973). Image Formation Using Self-Imaging Technique. *Journal of the Optical Society of America*. 63(4): 416-419.
- Dai D., Yang L., Sheng Z., Yang B., and He S. (2009). Compact Microring Resonator With 2×2 Tapered Multimode Interference Couplers. *Journal of Lightwave Technology*. Vol. 27, No. 21:4878-4883.
- Diemeer, M.B.J. (1998). Polymeric Thermo-Optic Space Switches for Optical Communications. *Optical Materials*. 9:192-200.



PTTA UTHM
PUSAT TEKNOLOGI DAN TRANSFER APLIKASI UTM
AMINAH

Ibrahim M.H. (2007). *Polymer Based Multimode Interference Optical Devices*.
Universiti Teknologi Malaysia: PhD Thesis.

Ibrahim M.H., Lee S-Y., Chin M-K., Kassim N.M., Mohammad A.B. (2007). Single Mode Optical Waveguide Based On Photodefinable Benzocyclobutene (BCB 4024-40) Polymer. *Microwave and Optical Technology Letters*. Vol. 49, No. 2: 479 - 481.

Inoue Y., Katoh K. and Kawachi M. (1992). Polarization Sensitivity of a Silica Waveguide Thermo-optic Phase Shifter for Planar Lightwave Circuits. *IEEE Photonics Technology Letters*, Vol.4, No.1:36-38.

Keil N., Yao H.H., Zawadzki C., Lösch K., Satzke K., Wischmann W., Wirth J.V., Schneider J., Bauer J. and Bauer M. (2001). Hybrid Polymer/Silica Thermo-Optic Vertical Coupler Switch. *Applied Physics B- Lasers and Optics*. pp: 469-473.

Koshiba M. (1992). *Optical Waveguide Analysis*. McGraw-Hill, Inc.

Lei Gao, Jie Sun, Xiaoqiang Sun, Caiping Kang, Yunfei Yan and Daming Zhang (2009), Low switching power 2 x 2 thermo-optic switch using direct ultraviolet photolithography process, *Optics Communications* 282: 4091–4094

Liu J., Yu J., Chen S., Xia J. (2005). Fabrication And Analysis Of 2 × 2 Thermo-Optic SOI Waveguide Switch With Low Power Consumption And Fast Response By Anisotropy Chemical Etching. *Optics Communications* 245: 137–144.

Majumdar P. (2005). *Computational Methods for Heat Transfer*. New York: Taylor & Francis.

May-Arrijoja D.A., Bickel N., and Likamwa P. (2006). Robust 2×2 Multimode Interference Optical Switch. *Optical and Quatum Electronics*. 38:557-566.

Nagai, S., Morishima, G., Inayoshi, H., and Utaka, K. (2002). Multimode Interference Photonic Switches (MIPS). *IEEE Journal of Lightwave Technology*. 20(4): 675-681.

Nishihara H., Haruna M., and Suhara T., (1989). *Optical Integrated Circuits*. New York: McGraw-Hill Book Co.

Okamoto K. (2006). *Fundamental of Optical Waveguide*, 2nd Edition, Elsevier Academic Press, United States of America.

Papadimitriou G. I., Papazoglou C. Pomportsis A.S. (2007). *Optical switching*. Wiley-Interscience.

Reed G. T. and Knight A. P. (2004). *Silicon Photonics: An Introduction*. John Wiley & Son, Ltd.

Sadiku M. N. O. (2006). *Element of Electromagnetic*, 3rd Edition, Oxford University Press, New York.

Schott AG Optical Glass Datasheet

SeongKu Kim, DongHo Cha, Qibing Pei and Kevin Geary (2010), Polymer Optical Waveguide Switch Using Thermo-Optic Total-Internal-Reflection and Strain-Effect, *IEEE Photonics Technology Letters*, Vol. 22, No. 4: 197-199.

Sohma S., Goh T., Okazaki H., Okuno M, and Sugita A. (2002). Low Switching Power Silica-Based Super High Delta Thermo-Optic Switch With Heat Insulating Grooves. *Electronic Letters*. Vol. 38, No. 3:127-128.



PTTA UTHM
PERPUSTAKAAN TUNKU TUN AMINAH

Soldano L. B., Veerman F. B., Smit M. K., Verbeek B. H., Dubost A. H., and Erik C. M. Pennings E. C. M. (1992). Planar Monomode Optical Couplers Based on Multimode Interference Effects. *Journal of Lightwave Technology*. Vol. 10, No. 12: 1843-1850.

Soldano L.B. and Penning M.C. (1995). Optical Multi-Mode Interference Devices Based On Self-Imaging: Principle and Application. *Journal of Lightwave Technology*. Vol. 13.no 4: 615-627.

Supa^{at} A.S.M., Mohammad A. B. and Kassim N.M. (2004). Polymer Based Directional Coupler Thermo-optic Optical Switch. *Jurnal Teknologi* : 1-8.

Tocci C. and Caulfield H.J. (1994). *Optical Interconnection: Foundation and Application*. Artech House Publisher. Boston. London.

Ulaby. F.T. (1999). *Fundamentals of Applied Electromagnetic*. Prentice Hall, 1999 Edition.

Ulrich, R., and Ankele, G. (1975). Self-imaging in Homogeneous Planar Optical Waveguides. *Applied Physics Letters*. 27(6): 337-339.

Wang F., Yang J., Limei Chen L., Jiang X., and Wang M. (2006). Optical Switch Based on Multimode Interference Coupler. *IEEE Photonics Technology Letters*. Vol. 18, No. 2:421-423.

Wu X., Liu L., Zhang Y., Li D., Wang W., Xu L. (2006). Low Electric Power Driven Thermo-Optic Multimode Interference Switches With Tapered Heating Electrodes. *Optics Communications* 258: 135–143.



PTTA UTHM
PEPUSATKAN TUNKU TUN AMINAH

Xia J., Yu J., Wang Z., Fan Z. Chen S. (2004). Low Power 2×2 Thermo-Optic SOI Waveguide Switch Fabricated By Anisotropy Chemical Etching. *Optic Communication* 232: 223-228.

Xiao G.Z., Zhang Z., Grover C.P. (2004). A Variable Attenuator Based On a Straight Polymer-Silica Hybrid Channel Waveguide. *IEEE Photonics Technology Letter*. 16(11):2511-2513.

Xie N., Hashimoto T., and Utaka K. (2009). Very Low Power Operation of Compact MMI Polymer Thermo-optic Switch. *IEEE Photonics Technology Letters*, Vol. 21, No. 18: 1335-1337.

Yaacob M. (2010). *Benzocyclobutene Polymer in Glass Multimode Interference Thermo-optic Switch*. Universiti Teknologi Malaysia: Master Thesis.

Yeo D-M., Shin S-Y, (2006). Polymer-Silica Hybrid 1×2 Thermo-optic Switch With Low Crosstalk. *Optics Communications*. 267: 388-393.

Yin R., Teng J., Chua S. (2008). A 1×2 Optical Switch Using One Multimode Region. *Optics Communication* 281: 4616-4618.

Zappe H.P. (1995). *Introduction to Semiconductor Integrated Optics*. Artech House Publisher. Boston. London.

