

MULTI FINGERED ROBOT HAND IN INDUSTRIAL ROBOT APPLICATION
USING TELE-OPERATION

MUHAMMAD ATIF YAQUB

A thesis submitted in
fulfilment of requirement for the award of the
Degree of Master of Electrical Engineering



PTTAUTHM
PERPUSTAKAAN TUNKU TUN AMINAH

Faculty of Electrical and Electronics Engineering
University Tun Hussein Onn Malaysia

OCTOBER 2012

ABSTRACT

This research focuses on the working and development of wireless robotic hand system. In this research previously developed models have been studied. After analysis of those models, a better approach has been presented in this research. The objective of this research is to design and develop a tele-operated robotic hand system. The robotic hand is intended for providing solutions to industrial problems like robot reprogramming, industrial automation and safety of the workers working in hostile environments. The robotic hand system works in the master slave configuration where Bluetooth is being used as the communication channel for the tele-operation. The master is a glove, embedded with sensors to detect the movement of every joint present in the hand, which a human operator can wear. This joint movement is transferred to the slave robotic hand which will mimic the movement of human operator. The robotic hand is a multi fingered dexterous and anthropomorphic hand. All the fingers are capable of performing flexion, extension, abduction, adduction and hence circumduction. A new combination of pneumatic muscles and springs has been used for the actuation purpose. As a result, this combination reduces the size of the robotic hand by decreasing the number of pneumatic muscles used. The pneumatic muscles are controlled by the opening and closing of solenoid valves. A novel technique has been used in the robotic hand for tendon routing, which gives the ability of independence to all finger joints. The heart of all the control mechanism of the system is mbed microcontroller. The designed system was tested at different module levels. The results show the successful establishment of communication between master and slave at a rate of 10 packets per second, which was sufficient for smooth motion of the system. The amount of torque produced at all the joints in the robotic hand has been presented in this research. The posture tests have been performed in which two fingers were actuated which followed the master. This system has achieved motion of fingers without any tendon coupling problem. The system is able to replace the human industrial workers performing dexterous tasks.



CONTENTS

ACKNOWLEDGEMENT	V
ABSTRACT	VI
LIST OF PUBLICATIONS AND AWARDS	VII
CONTENTS	IX
LIST OF FIGURES	XIV
LIST OF TABLES	XVIII
LIST OF APPENDICES	XIX
CHAPTER 1	1
INTRODUCTION	1
1.1 Problem statement	2
1.2 Robot Reprogramming	3
1.3 Worker Safety	4
1.4 Objectives of the Project	6
1.5 Scope of the research	6
1.6 Thesis Structure	7
CHAPTER 2	9
LITERATURE REVIEW	9
2.1. Types of Robotic Hands	9
2.2. Techniques for Dexterity in Robotic Hands	10
2.3. History of Robotic Hands	11
2.3.1. MIT MH-1	12
2.3.2. Soft Gripper	12
2.3.3. Stanford/JPL Hand	14
2.3.4. Okada Hand	15
2.3.5. Utah/MIT Hand	16
2.3.6. Toshiba Hand	17
2.3.7. National Taiwan University (NTU) Hand	19
2.3.8. DIST Hand	20



PTIT UTHM

PERPUSTAKAAN TUNKU TUN AMINAH

2.3.9.	Robonaut Hand	22
2.3.10.	Distributed Touch Sensor Hand	23
2.3.11.	DLR Hand	25
2.3.12.	High Speed Catching Hand	27
2.3.13.	Hydraulic Hand	28
2.3.14.	Kanazawa Hand	30
2.3.15.	DEX Hand	31
2.3.16.	Shadow Hand	32
2.4.	Teleoperation	34
2.4.1.	Bluetooth	35
2.5.	Commercially available robotic hands	36
2.6.	Actuators	36
2.7.	Summary	37
CHAPTER 3		38
RESEARCH METHODOLOGY		38
3.1.	Research process	38
3.2.	Theoretical foundation of robotic hands	40
3.3.	Dynamic Hand Modelling	46
3.3.1.	Extension movement	48
3.3.2.	Deflection movement	49
3.3.3.	Spherical movement	50
3.4.	Mathematical Model	51
3.4.1.	Free body diagram	51
3.4.2.	Differential Equation	52
3.4.3.	Transfer Function	54
3.4.4.	Constant Parameters	55
3.4.5.	Sensor Gain/Model	56
3.4.6.	Step Response	57
3.4.7.	Ramp Response	57
3.5.	SolidWorks Design	58
3.6.	Fabrication of functional Model	59



3.7.	Fabrication of working Model	59
3.8.	Controller Design and Implementation	60
3.9.	System Integration	62
3.10.	Testing and results	63
3.11.	Data Analysis	63
3.12.	Summary	63
CHAPTER 4		64
MECHANICAL DESIGN		64
4.1.	Finger Design	65
4.1.1.	Distal Segment	66
4.1.2.	Middle Segment	67
4.1.3.	Proximal Segment	68
4.2.	Palm Design	71
4.3.	Hand Assembly	72
4.4.	Fabrication Process	73
4.4.1.	Rapid prototyping	74
4.4.2.	Aluminium fabrication using CNC machine	76
4.5.	Frame Construction	79
4.6.	Muscle Assembly	81
4.7.	Motion Mechanism	83
4.8.	Summary	86
CHAPTER 5		87
ELECTRONIC CONTROL DESIGN		87
5.1.	System Overview	87
5.2.	Master Glove Module	88
5.2.1.	Bend Sensor	89
5.2.2.	Analog to Digital Conversion	90
5.2.3.	Microcontroller	92
5.2.4.	Firmware Development	94
5.2.5.	Schematic and Assembly	97
5.3.	Robot Hand Module	99



PTFA UTHM
PERPUSTAKAAN TUNKU TUN AMINAH

5.3.1.	Bluetooth Module	101
5.3.1.1.	Bluetooth Radio Layer	102
5.3.1.2.	Baseband Layer	102
5.3.1.3.	Link Manager Protocol (LMP)	103
5.3.1.4.	Host Controller Interface (HCI)	103
5.3.1.5.	Logical Link Control and Adaptation Protocol (L2CAP)	103
5.3.1.6.	RFCOMM	104
5.3.2.	Solenoid Valves	104
5.3.3.	Feedback Sensors	107
5.3.4.	Microcontroller	108
5.3.5.	Firmware Development	110
5.3.6.	Schematic and Assembly	113
5.4.	Summary	117
CHAPTER 6		119
SYSTEM INTEGRATION		119
6.1.	System Initialization	119
6.2.	Communication Channel Establishment	120
6.3.	Debugging Terminal	120
6.4.	Modules Testing	122
6.4.1.	ADC Testing	123
6.4.2.	Connection Testing	123
6.4.3.	Output Expander Testing	124
6.4.4.	Darlington switch IC Testing	124
6.4.5.	System Testing	125
6.5.	Summary	126
CHAPTER 7		127
RESULTS AND DISCUSSION		127
7.1.	BendSensor Data	127
7.2.	ADC resultant data	129
7.3.	Connection establishment result	130
7.4.	Output Expansion results	132



7.5.	Darlington Switch results	133
7.6.	System Results	134
7.7.	Denavit-Hartenberg Model	138
7.8.	Torque Analysis and Modelling	148
7.9.	Summary	155
CHAPTER 8		156
CONCLUSION AND RECOMMENDATIONS		156
8.1.	Conclusion	156
8.2.	Recommendations	159
REFERENCES		161
APPENDICES		168



PTTA UTHM
PERPUSTAKAAN TUNKU TUN AMINAH

LIST OF FIGURES

Figure 1.1 Reprogramming Required for change in material	4
Figure 2.1 Soft Gripper 1	13
Figure 2.2 Soft Gripper 2	13
Figure 2.3 Soft Gripper 3	13
Figure 2.4 Stanford/JPL Hand	14
Figure 2.5 Okada Hand	16
Figure 2.6 Utah/MIT Hand	17
Figure 2.7 Toshiba Hand	18
Figure 2.8 NTU Hand	20
Figure 2.9 DIST Hand	21
Figure 2.10 Robonaut Hand	23
Figure 2.11 Hand with distributed touch sensor	24
Figure 2.12 DLR-Hand II	26
Figure 2.13 Latest version DLR-Hand	27
Figure 2.14 High Speed Catching Hand	28
Figure 2.15 Hydraulic Hand	29
Figure 2.16 Kanazawa Hand	30
Figure 2.17 Dexhand	32
Figure 2.18 Shadow Hand	33
Figure 3.1 Stepwise research process	39
Figure 3.2 Systematic teleoperation diagram	40
Figure 3.3 D-H reference frames	41
Figure 3.4 D-H parameters	42
Figure 3.5 D-H parameters for the robotic hand	43
Figure 3.6 Model for the hand	47
Figure 3.7 Movements of the finger	47
Figure 3.8 Extension movement of the finger	48
Figure 3.9 Deflection movement of the finger	49

Figure 3.10 Spherical movement of the finger	50
Figure 3.11 Free Body Diagram of the Plant	52
Figure 3.12 Sensor Model	56
Figure 3.13 Sensor Model Simplified	56
Figure 3.14 System Model using Transfer Function in MATLAB	57
Figure 3.15 Step Response of system with $K_p = 500$	57
Figure 3.16 SolidWorks Mechanical design	59
Figure 3.17 Controller design schemes	61
Figure 3.18 Control diagram of robotic hand	62
Figure 4.1 Parts of finger	65
Figure 4.2 Front, Right and Back view of Distal Segment	66
Figure 4.3 Front, Right and Back view of Middle Segment	68
Figure 4.4 Front, Right and Back view of upper proximal segment	69
Figure 4.5 Front, Right and Back view of lower proximal Segment	70
Figure 4.6 Front, Right and Back view of lower proximal Segment of thumb	70
Figure 4.7 Views for the front part of palm	71
Figure 4.8 Front and back views of robotic hand	73
Figure 4.9 Fabrication process	75
Figure 4.10 Comparison of human hand VS assembled Model	75
Figure 4.11 CNC machine processing the part	77
Figure 4.12 Fabricated parts using Aluminium	77
Figure 4.13 UTHM Hand Vs Human Hand	78
Figure 4.14 Assembled UTHM Hand	78
Figure 4.15 Top plate for stopping and holding the springs	79
Figure 4.16 Bottom plate for solenoid valve mounting	80
Figure 4.17 Pneumatic muscle used in project	81
Figure 4.18 Pneumatic muscles assembled in frame	82
Figure 4.19 Tendon Strings attached to pneumatic muscles	83
Figure 4.20 Tendon Strings Routing Mechanism	84
Figure 4.21 Tendon Strings Routing Mechanism for abduction and adduction	85
Figure 5.1 System block diagram	88



Figure 5.2 Master Glove Module block diagram	88
Figure 5.3 BendSensor and glove used in system	89
Figure 5.4 Location for sensors	89
Figure 5.5 BendSensor used in voltage divider	90
Figure 5.6 ADC Configuration	92
Figure 5.7 mbed microcontroller board	93
Figure 5.8 Flowchart of Firmware for Master Glove	96
Figure 5.9 Schematic of Master Glove Board	98
Figure 5.10 Operator wearing Master Glove	99
Figure 5.11 Robotic hand module block diagram	100
Figure 5.12 Closed loop system of robotic hand	101
Figure 5.13 Architecture for USB Bluetooth device	102
Figure 5.14 Solenoid Valve	105
Figure 5.15 Pulse width VS Flow rate	107
Figure 5.16 BendSensors mounted between and at the back of fingers	108
Figure 5.17 Output Expansion configuration	110
Figure 5.18 Flowchart of slave robotic hand module	112
Figure 5.19 Schematic of slave robotic hand module	115
Figure 5.20 Controller board mounted on the muscle assembly	116
Figure 5.21 Tee joint assembly	117
Figure 6.1 Starting screen of Tera Term Version 4.71	121
Figure 6.2 Serial port setup in Tera Term Version 4.71	122
Figure 6.3 Complete integrated system	126
Figure 7.1 BendSensor calibration data	128
Figure 7.2 Comparison of raw and filtered data	128
Figure 7.3 Serial output of ADC	129
Figure 7.4 ADC data from master glove	129
Figure 7.5 Angle of finger's joint while perform flexion and extension	130
Figure 7.6 Screenshot of Tera Term showing the listening status of the slave	131
Figure 7.7 Screenshot showing the connection request and acceptance	131
Figure 7.8 Serial input of output expansion chips	132



Figure 7.9 PWM signal from output expansion chips	132
Figure 7.10 High Power PWM signal	133
Figure 7.11 Index finger and middle finger bent under thumb	134
Figure 7.12 Ring finger and pinkie finger bent under thumb	135
Figure 7.13 Object holding test	136
Figure 7.14 Step response of distal segment of thumb	137
Figure 7.15 Ramp response of distal segment of thumb	137
Figure 7.16 Denavit-Hartenberg reference frames	138
Figure 7.17 Finger and joint labels	139
Figure 7.18 Comparison of joints angles of UTHM hand with human hand	142
Figure 7.19 Sensor locations for the master glove	149
Figure 7.20 Description of joint angles	149
Figure 7.21 Torque illustration	153
Figure 7.22 Torque on segment joint	153



LIST OF TABLES

Table 7-1 Denavit-Hartenberg parameters	140
Table 7-2 Table for kinematic structure details	141
Table 7-3 Torque produced at all joints	154



PTTA UTHM
PERPUSTAKAAN TUNKU TUN AMINAH

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
A	BendSensor Characteristics	169
B	ADC MCP3208 Guide	173
C	Expansion Chip MCP23S17 Guide	176
D	Quad Darlington Switches	178
E	Source Code for Master Glove	182
F	Source Code for Robotic Hand	186



PTTA UTHM
PERPUSTAKAAN TUNKU TUN AMINAH

CHAPTER 1

INTRODUCTION

Robots have become an integral part of modern human life. With every passing year the population of robots are being increased. The industry has replaced a large number of human workers with lesser number of robots on the grounds of economy and efficiency. A robot is a modern version of slave, which perform any task in its capacity satisfying the old human instinct to rule. A robot follows the command as ordered by the human master. Therefore the humans can still enjoy mastering a thoughtless, speechless but efficient slave under their authority.

Hands have been thought of being the key to the intelligence of humans. Aristotle and Anaxagoras had been discussing this matter hundreds of years ago [1]. Among all the creatures inhabiting this earth, humans are the only living being that have been gifted with this kind of hands. These hands are capable of doing many tasks in our daily routine like dexterously handling different things and even sensing. Human hand has been an area of interest and research since the advent of intellect and has been considered to be one of the reasons that human intelligence is superior to all living creature on Earth. It has been confirmed by the several findings of paleoanthropologists, showing that the mechanical dexterity of the human hand has been a major factor in allowing Homo sapiens to develop a superior brain.

Our hands are the most complicated and delicate part of our bodies, which consist of fifty four bones in a variety of size and hold the capacity to perform a great range of tasks. The research on humanoid robotic hand has been developed for the past



few decades which range from the simplest design of parallel jaw grippers to complex configurations of dexterous multi-fingered hands.

While the human hand's dexterity has been admired since the oldest times, it is still an unmatched standard for artificialists. There have been many artificial hands made till date that have been showed to be stronger and faster than the human hand but still in the broader spectrum of dexterous manipulations it cannot match the human hand. It is therefore natural for an engineer to take inspiration from such a design success, and set forth for himself the goal of building hands that achieve, though partially, such capabilities. The toolbox of Mother Nature containing actuators, sensors, and control elements is unmatched and superior to the resources of latest technology. Hence, the question whether artificial hands should look like those of humans is not quite settled. The answer is application specific and depends on what is expected from the hand. Because functions of human hands are multi faceted and variable, therefore there is no robotic hand that can compete with it. Only for specific application the robotic hands are more robust, strong and efficient.

In tele-operation normally the master-slave configuration is used. Master is a human operator that commands the slave robotic hand to do useful work. In this project the human operator will wear a master glove that will be embedded with sensors to detect the motion of the human operator. The data from the motion of the fingers of human operator will then be sent to robotic hand that will follow the motion.

1.1 Problem statement

Nowadays robots are present in automobiles industries, electronic equipment assembly line and other state of the art industries. They are faster and accurate than humans. But the robots have to be reprogrammed every time when their task has to be changed. For example, a robotic hand was programmed to pick a steel rod from one table and put it on another table. Now to perform the same task for a plastic pipe, the robotic hand has to be reprogrammed, because if it applies the same amount of force to grasp the plastic rod that it applied on steel rod, it will damage the plastic rod. Therefore



it can be seen that even for a little change, the robot has to go through lengthy reprogramming process. Solution for this problem is tele-operation in which the robot can be controlled by a human from a certain distance.

We have to design and develop an anthropomorphic dexterous multi-fingered hand, for the industrial purpose, in order to get the precise and accurate grasp. It should mimic flexibility and sensitivity of the actual human hand. Also as mentioned before, the reprogramming problem of robots must be overcome. There is lot of losses that the industry faces due to human errors so they have to discard a certain number of damaged products. The robotic hand will also overcome this problem as it will be precise in handling objects. Also there are certain places that are harmful for humans like very high temperature or any hostile environment where there is a risk of injury to the worker, so in these places our robotic hand will replace the human operator. As it will be controlled using tele-operation by a human therefore it will act like the worker is handling the objects in that hostile environment.

1.2 Robot Reprogramming

This robotic hand system also provides the solution for the robot reprogramming system. The robotic systems are programmed for their specific use. Therefore when there is a change in the task, the robotic system must be reprogrammed or replaced by new robot. To fix this problem, this project has used tele-operation.

Consider an assembly line where a robot hand is being used for pick and place operation. The robotic hand picks steel pipes and places them to another place. After some time plastic pipes are also added to the assembly line with same size and shape as steel pipes. But the robotic hand system is programmed to pick a steel pipe. When this robotic hand grips the plastic pipes with the same amount of force as it did for the steel pipes, the plastic pipes will be damaged as they cannot stand the force applied by the robotic hand to grip it as shown in Figure 1.1.



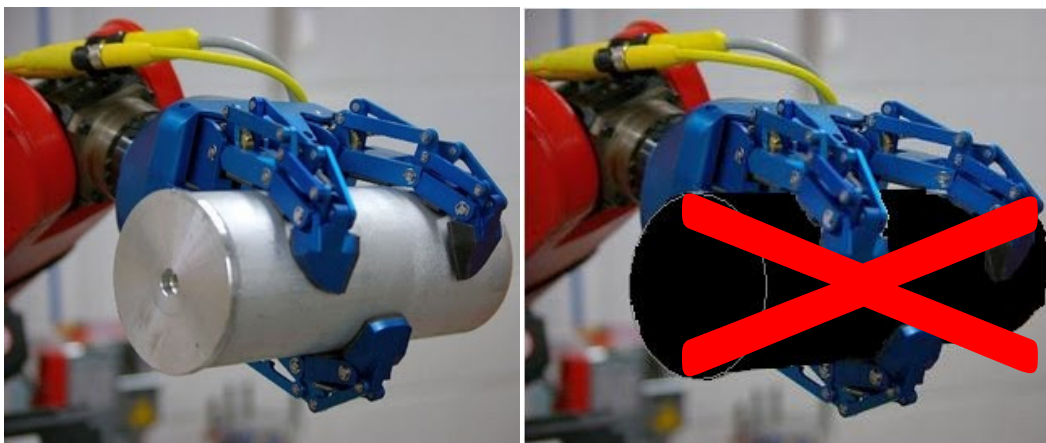


Figure 1.1 Reprogramming Required for change in material

In the last scenario only the material has been changed while the size and other features were kept constant, still there was a need for the reprogramming. This shows the severity of this problem. Even a small change can cause the assembly line to acquire a new robot or at least reprogramming of robot. But with this project as the information of gripping is provided in real time, therefore it can adjust the force applied by the hand. Therefore the robotic hand operated by tele-operation is providing a solution to the robot reprogramming problem faced by industry.

1.3 Worker Safety

The robot hand is intended to be used in the industrial applications. In industry there are workers who are working in hostile environments. They fulfil their tasks by putting their lives in danger. Every year there are many cases of industrial accidents in which the workers get injured, lost part of their body or in some cases get fatal accidents. The industries that have a high rate of accidents involve but not limited to;

- Metal melting industry
- Chemical industry
- Cutting industry

- Atomic reactors where high radiation levels are observed
- Space Exploration
- Mining

The metal melting industry puts workers in very high temperature environments. They deal with metals with very high temperature that can easily subject them to burning. In the chemical industry the workers are dealing with highly acidic chemicals and other highly reactive materials. The processes inside the chemical industry can produce harmful gases that the workers are subjected to inhale. In cutting industry the workers are using big and high speed blades and even lasers. They are subjected to the cutting injuries from the blades. In the atomic reactors the workers are subjected to high radioactive environments. The radioactivity can cause many health problems even cancer. In the space exploration the astronauts that are sent to the space require a lot of things to survive whereas a robot is independent. When the astronauts are working outside their shuttles in open space they are attached by a rope like link. If this link is broken they will be out of the reach of the world forever. In the mining industry the workers are subject to breathing problems because of the environment inside the mines. The workers are often subjected to the fatal accidents that are caused by the mine collapse. The list for this kind of industries and their hostile environments is too big to be covered here. This is just a brief summary of actual facts to prove the severity of problem.

With this tele-operated robotic system the worker can sit inside a safe room whereas the robotic hand can perform the workers tasks. The robotic hand is anthropomorphic as well as dexterous; therefore it is capable of doing the industrial tasks just like the worker. The worker will be wearing the master glove and dynamically control the robotic hand. Therefore the tele-operated robotic hand is also providing safety of the workers in hostile environments.



1.4 Objectives of the Project

The main objectives of this project are defined as follows:

1. Designing, fabricating and implementation for the robotic hand.
2. Design of the master glove that human operator will wear to guide the robotic hand movement.
3. Establishment of communication channel, between the master glove and the slave humanoid robotic hand, for the transfer of information about motion of master hand.

1.5 Scope of the research

The research work will focus on development of robot hand that works with master slave configuration. In this configuration master controls the slave movement. Master will be a glove that a human can wear and move the hand in the way he wants the slave robotic hand to be moved. The glove containing sensors will detect the movement and transfer that motion in the form of digital data to the robotic hand which will mimic that movement. The master slave communication will be through Bluetooth channel. The size of the robotic hand will be approximately similar to actual human hand. The anthropomorphic robotic hand will be used for gripping applications. SolidWorks 2010 is used to design and simulate the mechanical design of robotic hand. Mbed LPC 1768 rapid prototyping board is used to control robotic hand as well as the communication flow between the master and slave devices.

1.6 Thesis Structure

Chapter 1 provides brief description to the robotic systems. It describes the link between the hand and human brain. The chapter briefly compares the work of artificialists and Mother Nature. It introduces to the problem faced in this field and the objectives of this project. It describes about the system configuration and its scope.

Chapter 2 describes the literature review in the field of robotic hand and grippers. The analysis and discussions about the robotic hands made till date from the very beginning has been provided in this chapter.

Chapter 3 provides the information of the process of research and development used in this project. It builds the theoretical foundation of the project. It completely describes the flow of progress of this project.

Chapter 4 provides the information about the detailed mechanical design of the project. It depicts all the fingers and their joints with their motions. It describes the complete structure of the robotic hand and its motion mechanism. It also gives the detailed description of the pneumatic muscles used and their assembly. Finally it provides the mathematical modelling of the fingers according to their movements.

Chapter 5 provides the full information of all the electronics involved in the system. It describes the working of all the components used in the system. It establishes clear views of the working and flow of the firmware of both the master and slave. Finally it provides the mathematical modelling of the torque produced at the robotic hand.

Chapter 6 discusses the integration of complete system. It provides the information of the testing methods and the debugging tool. It also mentions the problem solved by the system in detail.

Chapter 7 provides the results and analytical discussion on the achieved results from the robotic hand system. It provides the modelling of the fingers and their motion. It also builds the model of finger positions according to the theoretical foundation established in chapter 3. It provides the torque analysis and forces applied by the fingers segments.

Chapter 8 presents the conclusions and recommendation after analysing the complete project.



CHAPTER 2

LITERATURE REVIEW

This chapter provides a detailed overview of different techniques used in developing the robotic hand. It will also help in understanding the different types of hand that were in use throughout the history of robotics and the problems that arise.

2.1. Types of Robotic Hands

There are different types of robotic hands, such as for industrial purpose, for rehabilitation and for the purpose of research to understand the human structure and functioning of hand. The focus in this project study will be on the anthropomorphic hands and grippers. If the system is to use the same interface with the environment that was designed for the human hand (such as handles, consoles, tools etc.), then an anthropomorphic hand can best fit the task. Anthropomorphic hand is one that mimics an actual human hand. So anthropomorphic hands are dexterous in nature as they have the tendency to dexterously manipulate the objects they come in contact with.

Anthropomorphic design makes it easier for the human operator to map his natural manipulation behaviours and skills into commands for the device [2]. Planning and programming actions of kinematically complex robotic hands has always been a



PTTA UTHM
PERPUSTAKAAN TUNKU TUN AMINAH

difficult task, which contributed to the scarce penetration of robot hands in practical applications. On the contrary, an anthropomorphic machine hand can be taught directly by “demonstrating” the desired human behaviours in manipulation and grasping. In such systems, easily available sensorized gloves, or in some cases mechanical masters, are used to provide measurements of the master’s hand movements.

2.2. Techniques for Dexterity in Robotic Hands

For the object manipulation different techniques had been practised by researchers. One of the techniques is regrasping [3] and finger gaiting [4]. It comprises of a sequence of grasps until the object is held firmly in hand. But regrasping can be time consuming as there can be a need for grasping and releasing until the final firm grip. Also there can be problem when manipulating irregular shaped 3D objects which have quite little number of stables grasp position as the hand can leave the object during the process of regrasping.

Both the finger gaiting and regrasping involves kinematics and dynamics of manipulation, effect of gravity, slipping and the contact or detachment of one finer from the object. So this comprise of a hybrid system with some part event-driven and some part time driven. Thus the stability analysis and verification of these techniques are tricky.

The degree of flexibility of manipulation can be certainly increased if the hand is allowed to slide some contacts with the object. Humans also can be observed to do this kind of manipulation. People have been actively researching in this technique as this can very much enhance the manipulation capability of the robotic hand [5]. The prediction of occurrence of slippage is instrumental in order to use and control it. This implies the need for an accurate analysis of friction and slippage phenomena. In particular, in the case of combined torsion and shear loading, evaluating from sensor readings a “margin of stability” for the contact before slipping is a very important but rather difficult task, for which only partially satisfying solutions are known so far [6].

Another problem in this area is the synthesis of sets of contact locations for selectively preventing and allowing slippage motions of grasped objects. The modelling for this technique is also difficult as modelling the friction at different surfaces has always been a big challenge for researchers.

In tele-manipulation/tele-operation [7], [8], [9], [10] and [11] movements of the master hand are replicated by the anthropomorphic slave device. A feeling of “immersion” of the operator in the remote (possibly virtual) environment may be enhanced by the good match of the machine hand functions with the natural ones, although there exist examples of non strictly anthropomorphic hands intended also for remote operation.

In between the completely unstructured world and the perfectly defined environments, there is a whole gray scale of applications where the familiar flexibility/efficiency tradeoffs have to be sought for actively. This concept is well rooted in the robotics community. Design of devices for this class of problems usually obeys the good old engineering principle of minimalism: choose the simplest mechanical structure, the minimum number of actuators, the simplest set of sensors, etc., that will do the job, or class of jobs. For the complexity measure the number of actuators for manipulation in one robotic hand can be seen. The minimum number of actuators in the hand for dexterous manipulation is nine, but for a complex hand structure the number of actuators can go up to 32 [2].

2.3. History of Robotic Hands

The field of robotics is evolving day by day as new problems arise for automation. The history of robotic hands can be dated back to 1961 when Heinrich Ernst develops the MH-1 a computer operated mechanical hand at MIT [12]. From this date we can imagine how much grown up and mature is the field of robotic hands. People from a long time have been fascinated by the human hand and its ability of dexterous manipulation of objects.

2.3.1. MIT MH-1

In Heinrich's MH-1 a mechanical servo manipulator has been adapted for operation by the TX-0 computer [12]. The sensors on the mechanical hand gave information to the computer; the program processes this information, and the computer controls the motors that move the hand. The MH-1 system performs more than just the speed control and position control; it performs in accordance with a pre-recorded program that has been written by a programmer after a careful analysis of the real world with respect to the broad description of the tasks to be performed. Thus it could select appropriate routines by itself and find out what to do in unexpected situations for which the programmer has not provided an explicit instruction.

For example one program consisting of nine statements will make the hand do the following: Search the table for a box, remember its position, search the table for blocks, collect them and put them in a box. As a test of built-in mechanical intelligence if the box was taken away from the original position while the hand is searching for blocks, MH-1 will remember the new position of the box and continue to work with it as soon as it realized the change in the position by bumping into the box while searching for blocks.

2.3.2. Soft Gripper

After Heinrich's MH-1, Soft Gripper was reported to be developed by Hirose-Fukushima Lab at Tokyo Institute of Technology in 1976 [13]. The soft gripper was a snake-like mechanism that could flexibly grab an arbitrary shaped object. To flexibly grasp an object, it must be possible to create a uniform grasping force on all the gripper surfaces while wrapping around the object.



Figure 2.1 Soft Gripper 1



Figure 2.2 Soft Gripper 2



Figure 2.3 Soft Gripper 3

This gripping function is realized by means of a mechanism consisting of multi-links and series of pulleys. It was a mechanism in which the joints and pulleys were all connected to rotate independently, and the wire fixed to the head joint was pulled by coiling around all the pulleys. In that mechanism, when the wire was pulled, a bending moment proportional to the radius of the pulley was generated on each joint. For that reason, when the pulley radius is designed to change in terms of secondary functions and the wire coiling around the pulleys is pulled, then the uniform grasping is possible. The grip release motion was conducted by pulling the series of pulleys of the same radius in the opposite direction. When this was done, the device was housed by winding it up in a coil shape from the tip. Soft gripper 1 was the primary model developed which can grasp small objects like snake. Soft gripper 2 was a large scale model developed to hold up a human body from the assistance of human commands. The drive system for

vertical and horizontal grasps was also developed. Soft gripper 3 was a belt driven model with three fingers.

2.3.3. Stanford/JPL Hand

Salisbury and Mason 1985 showed first that theoretically the least number of degrees of freedom to achieve dexterity in a robotic hand with rigid, hard-finger, non-rolling and non-sliding contacts, is nine [14]. From this statement we can extract that there should be three fingers with each finger exhibiting three degrees of freedom for complete manipulation or gripping of an object. The practical demonstration of this work is the development of Stanford/JPL hand. The Salisbury or Stanford/JPL Hand was consequently designed to have nine joints, evenly distributed in each finger so as to optimize a measure of individual “manipulability” of the finger. Each finger had three DOF and is driven by four motors through tendon cables, two parallel axis joints provide rotation and the third proximal joint, perpendicular to the other joints, provides the sideward motion.

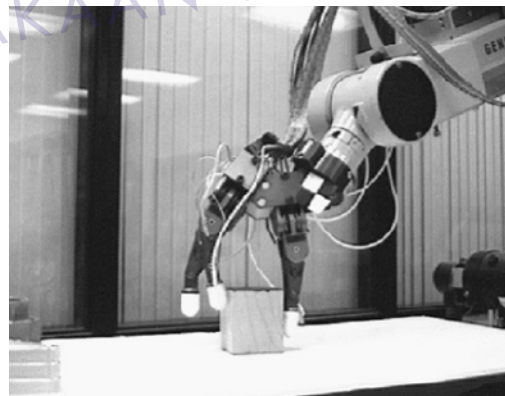


Figure 2.4 Stanford/JPL Hand

Due to large number of motors and strong coupling in the tendon configuration, the control system of JPL/Stanford hand was very complicated. In addition, it was also difficult to maintain calibration using the tension of four cables in a finger.

2.3.4. Okada Hand

Some researchers developed their version of hands by adding more degrees of freedom instead of just 3. By adding more degrees of freedom they can have more flexibility of use. Example of one successful design is from Tokyo, Japan in 1979 by Tokuji Okada [15]. He developed a three finger design but with different number of joints and hence different degrees of freedom in each finger. He added four joints in two fingers and one thumb with three joints. This hand also uses finger gaiting in the process of manipulating the held object. Finger gaiting is the technique in which one finger is repositioned on the surface of the object. By using this technique Okada hand can grip the objects more firmly.

To make the fingers flexible and to make the finger subsystem more compact, the cables, hoses, and signal lines of sensors were passed through the finger tubes. Each joint of the mechanical hand is driven by a dc motor. Motors for driving the finger joints are located within a trunk separated from the fingers. The bending angle of each joint and the corresponding torque were indirectly detected from a potentiometer and a value of the motor current in the trunk, respectively. The torque of the finger joint was controlled by changing the magnitude of a motor armature current, and the fingers were controlled flexibly by suitably changing the mode between position and torque control. This robotic hand was able to perform not only simple motions as bending and extending but also flexing motions as adduction and abduction. Cooperative motions among the fingers were easily realized by means of the hardware servo system. In an experiment of swing motion, cooperative motion based on a force control was accomplished between the right and left fingers without dropping the object. Bar turning and sphere turning were accomplished smoothly by a computer control in which control signals for finger joints are generated by interpolating a sequence of set points that has been stored in the computer in the teaching process.



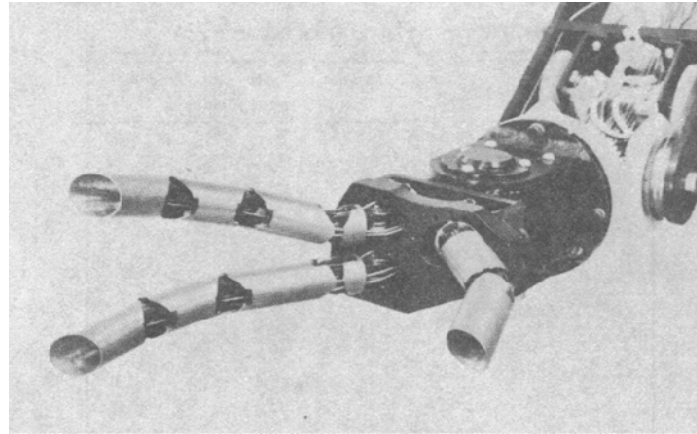


Figure 2.5 Okada Hand

2.3.5. Utah/MIT Hand

After the seminal work done with the Utah/MIT Hand [16], hands of this type have been built in several labs. The objectives of this hand were; firstly, it will permit the experimental investigation of basic concepts in manipulation theory, control system design and tactile sensing and secondly, it will expand understanding required for the future design of physical machinery and will serve as a “test bed” for the development of tactile sensing systems. The Utah/MIT had three fingers and one thumb each having four joints and in total having 16 degrees of freedom with 32 tendons. Two tendon cables for each joint were used and each tendon cable was attached to the tendon tension sensor to track the torque imposed on individual joints. The positioning and tension sensing of this anthropomorphic robotic hand was done by using magnetically sensitive Hall Effect sensors. The actuators for the robotic hand were placed outside of the hand due to space requirements. Complex actuation pneumatic system is used for the actuation consisting of actuating cylinder, adjustable pneumatic dampers and spring tensioning systems within cylinders. The Tendons are routed throughout the hand via sequences of pulley induced bends and axial twists.

The Low Level Control System included 16 variable-loop-gain position servos to operate finger joints and 32 variable-loop-gain tension servos to modulate actuator

behaviour such that tendon tensions were closely controlled. The system also provided all the analog outputs of all sensor signals generated within the hand. Many control inputs were supplied to the robot hand as 16 inputs for control of angular position, 32 inputs for control of desired tendon tension, 16 inputs to vary position servo loop gain and 32 inputs to vary tendon tension servo loop gain. The digital system consisted of five Motorola 68000 microprocessors, a multibus card cage, 40 channels of digital to analog conversion and 320 channels of analog to digital conversion.

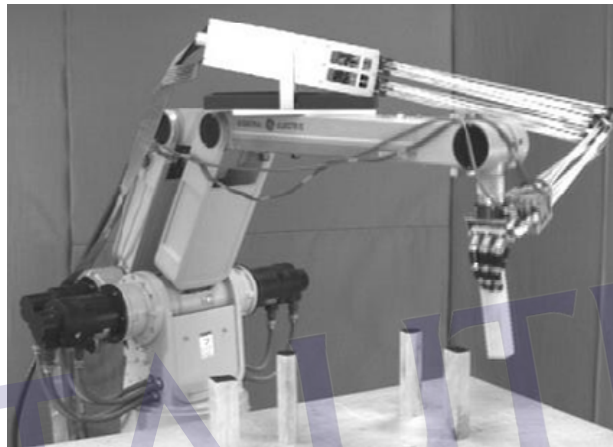


Figure 2.6 Utah/MIT Hand

2.3.6. Toshiba Hand

In 1993 Toshiba Corporation in Japan made a robotic hand with finger tactile sensors [17]. The hand consisted of four fingers each with four joints, which were actuated by dc motors, and had the tendency for abduction and adduction just like humans. In the developed hand, each DC motor unit consisted of a DC motor, a reduction gear and a tacho-generator, which was built in the back of the hand. By putting the actuators at the back of the hand the weight of the hand became 1.71 kg. Each finger had tactile sensors on their tip which had silicon rubber cap with cavity that was filled by an non-compressible fluid. The fluid transferred a contact force with an object to a semiconductor pressure gage. Using these sensors and potentiometers mounted at one

side of each finger joint, contact forces with an object and angles of the fingers are controlled.

The controller for this system was composed of 22 servo amplifiers (16 for fingers and 6 for arm) and a multiprocessor system. The multiprocessor system was composed of 6 single microprocessor boards (Motorola 68030 with 6SSS2 and 25MHz) and interface boards (three 32-channel A/D boards, two 12-channel D/A boards, two 3-channel UP/DOWN counter boards and two 64-channel DIO boards). Four computer boards were used for single finger control, one for task planning and making references, one for arm control, supervision of this computer system and man-machine interface.

This robotic hand showed that it can pick a pen and then manipulate the pen dextrously in order to make the pen in vertical position so that it can write some characters. The picking of pen was helped by an image processing system which guided the robotic system to the place and orientation of the pen.

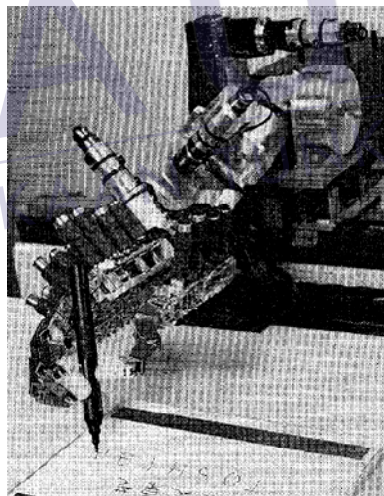


Figure 2.7 Toshiba Hand

2.3.7. National Taiwan University (NTU) Hand

A five finger anthropomorphic hand was developed by National Taiwan University in 1996 with seventeen degrees of freedom [18]. In contrast to previous tendon-driven robots, the NTU hand had an uncoupled configuration that allowed each finger and joint to be driven individually. Completely intrinsic design was developed by putting all the actuators, mechanical parts and sensors inside the robotic hand. The size of this hand is almost the same as human hand. Due to the small size this hand was suited for industrial as well as for rehabilitation purposes. The hand was easily mountable to the wrist of industrial arm or the casualty.

The actuators were micro motors but a lot of gearing were present in each finger. The design of all the fingers was same therefore all the fingers were independent and exchangeable making it easier for the maintenance and reducing the hand cost. The maintenance was simply replacing the damaged finger assembly without recalibration of whole system. The performance of the hand system was enhanced once the material for the hand was improved. The thumb and first finger had four joints while the remaining fingers had three. Each finger was equipped with the tactile sensor to detect the grasping force. Each finger segment, except the distal segment, contained one high performance micro motor that drove a set of specially arranged gear trains to rotate the previous finger segment. The assembling of these fingers was very complex as a lot of gearing was involved inside each finger segment. Due to the gear trains the accuracy of the joint position was a problem.



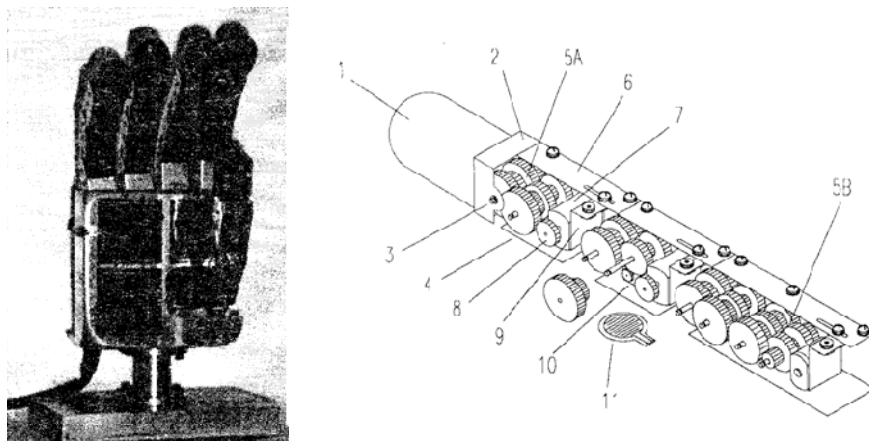


Figure 2.8 NTU Hand

2.3.8. DIST Hand

In 1998 University of Genova developed DIST hand [19] and [20]. The DIST-Hand was a four fingered mechanism with sixteen degrees of freedom with a high degree of dexterity. The main goal pursued during the development of the DIST-Hand was designing a small and lightweight dextrous gripper with anthropomorphic kinematics, which could be easily ported and installed even on small robot manipulators. The developers tried to develop with possible cheap off-the shelf components where available to reduce the overall cost of robotic hand.

Each finger had four joints each and each joint was able to move more than 90° according to the human hand. Each finger was actuated through 6 tendons made of polyester, routed through pulleys and driven by 5 DC motors. In particular, tendons 5 and 6 driving the first joint were actuated by a single motor. The routing of the tendons enables the decoupled motion of each finger joint, and the control of the fingertip stiffness. All the idle pulleys were mounted on miniature ball bearings as well as the joint supports in order to reduce the friction effects. The problem of tendon coupling was also present in this robotic hand as well. Due to the coupling problem the mapping of tendon tension and joint torques was also difficult.

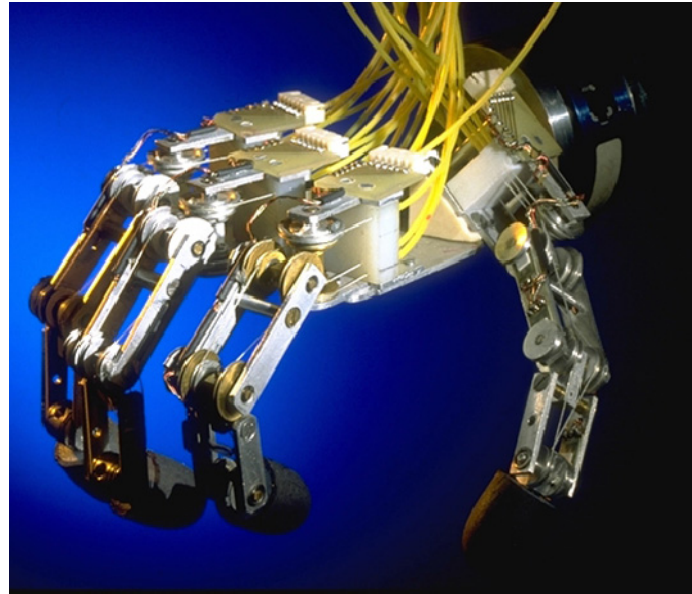


Figure 2.9 DIST Hand

The tendons and relative sheaths produced elastic perturbations in the position of the finger which made the control of the fingers' motions, using position and velocity feedback directly from the motor axes, critical. To address this problem, they developed ad hoc rotation sensors mounted on each joint. Using these sensors it was possible to implement servo loops around the perturbations due to the elasticity and in part to friction. The sensor was based on the use of a solid state Hall Effect transducer. The sensor was contactless therefore it does not affect the motion of the joints. Furthermore, it had a significant immunity to noise with respect to other transducers of comparable size (e.g. micro/mini potentiometers, encoders).

The control hardware was VME based and it included two Motorola 68040 based CPU boards and four IP modules for I/O purposes. Two IP Precision ADCs were used for sampling both hall sensors and potentiometers and two DENSE-DACs were used for sending torque commands to the various motors. The Simulink and Real Time Workshop MATLAB's Toolboxes jointly with the Wind River's TORNADO development environment were used to design and implement the real controllers. Later in 2003 they presented the control based on FPGA of the DIST-Hand (Casalino G. et.al. 2003). The controller adopted for the DIST-Hand presented a multi-layered hierarchical

structure. In that structure they had Medium Level Control (MLC), Low Level Control (LLC) and Very Low Level Control (VLLC). Each finger had LLC and VLLC. The VLLC directly interacted with the physical systems. Whereas the LLC provided input to VLLC in the form of joint position reference signal to drive the fingertip. The purpose of the MLC layer was to make all the fingers accomplish, in a cooperative way, an assigned common task (i.e. objects grasping or manipulation), without dealing with the dynamic and kinematic structure of the underlying robotic system. MLC also provided the cartesian position references to LLC according to the task performed. FPGA was mainly used to perform the hardware parallel processing to implement the complex algorithms requiring a number of matrix multiplications. The design and implementation of the real controller was made possible by the use of the System Generator, a tool developed by Xilinx in partnership with The Mathworks that enables designers to develop high-performance systems for Xilinx FPGAs using the popular MATLAB/Simulink environment.

2.3.9. Robonaut Hand

To meet the requirements for extra-vehicular activity (EVA) onboard the International Space Station (ISS), NASA developed and presented an anthropomorphic robotic hand [21]. Both power and dexterous grasp were the requirement for this space bound robot hand. As this hand was supposed to interact with the EVA crew tools, therefore it was required to perform dexterous manipulation by single or multiple fingers while grasping.

The Robonaut hand was closest in size and capabilities like kinematics and strength to a suited astronaut's hand and wrist. The hand along with the wrist had fourteen independent degrees of freedom. The hand alone has five fingers with twelve degrees of freedom. It consisted of a forearm in which the motors and drive electronics were placed, a two degree of freedom wrist, and a five finger, twelve degree of freedom hand. The forearm, which was four inches in diameter at its base and was approximately eight

inches long, contained all fourteen motors, 12 separate circuit boards, and all of the wiring for the hand. The finger drive mechanism consisted of brushless dc motor and planetary gear head.



Figure 2.10 Robonaut Hand

The hand itself was broken down into two sections; a dexterous work set which was used for manipulation, and a grasping set which allowed the hand to maintain a stable grasp while manipulating or actuating a given object. This was an essential feature for tool use. The motors were mounted outside the hand, and mechanical power was transmitted through a flexible drive train. The drive train consisted of flex shafts and leadscrew assemblies. By using this they avoided the use of tendon cables which required a complex system of pulleys.

The hand was equipped with forty-three sensors not including tactile sensing. Each joint was equipped with embedded absolute position sensors and each motor was equipped with incremental encoders. Each of the leadscrew assemblies as well as the wrist ball joint links were instrumented as load cells to provide force feedback.

2.3.10. Distributed Touch Sensor Hand

A control system for multi-fingered robotic hand with distributed touch sensor has also been proposed [22]. The hand along with the arm had twenty two DOFs while sixteen for the robotic hand alone. The hand was meant as a prototype for the control

and task execution system. The hand was anthropomorphic in nature as it had five fingers but the size was twice the size of normal human hand which made it controversial to be called as anthropomorphic. Each finger had four joints; the thumb had four DOFs while the other fingers had three only. The hand surface was covered with soft rubber sheet. The distributed touch sensor was placed under the soft rubber sheet. This sensor had more than 500 measuring points on overall surface. The actuators of all finger joints were the servo unit of radio control model and all arm joints were driven by AC servo motor. The weight of this robotic hand was about 2.5kg. The servo unit of each finger joint was able to exert enough torque to handle the object within 500g and its movable angle range was around 120 degrees.



Figure 2.11 Hand with distributed touch sensor

The distributed touch sensor used had 64 lines and 16 lines of electrodes, which were placed on the both side of the pressure sensitive conductive rubber sheet. The maximum number of pressure measure points was 1024 (64 times 16). The pressure of each point was acquired in 12 bits resolution through ADC board. The whole surface was scanned within 20ms.

In the hand control system, the position and force references of control points were transformed to the velocity references of corresponding control points. The velocity references of all control points were then transformed to the joint angular velocity reference vector by using the Jacobean matrix. The sampling period of the control system was 5ms but the processing time for calculation limits the number of control

REFERENCES

- [1]. Aristotle, *Di partibus animalium*: 687a 7, ca. 340 BC
- [2]. M. A. Farooqi, T. Tanaka, K. Nagata, Y. Ikezawa, and T. Omata, "Sensor based control for the execution of regrasping primitives on a multifingered robot," in *Proceedings of IEEE International Conference Robotics and Automation*, 1999.
- [3]. J. Hong, G. Lafferriere, B. Mishra, and X. Tan, "Fine manipulation with multifinger hands," in *Proceedings of IEEE International Conference Robotics and Automation*, 1990, pp. 1568–1573.
- [4]. A. A. Cole, P. Hsu, and S. S. Sastry, "Dynamic control of sliding by robot hands for regrasping," in *IEEE Transactions on Robotics and Automation*, vol. 8, pp. 42–52, Feb. 1992.
- [5]. S. Goyal, "Planar sliding of a rigid body with dry friction: Limit surfaces and dynamics of motion," Ph.D. dissertation, Cornell Univ., Ithaca, NY, 1989.
- [6]. A. Bicchi, "Hands for dexterous manipulation and robust grasping: A difficult road toward simplicity", in *IEEE Transactions on Robotics and Automation*, vol. 16, pp. 652 - 662, 2000.
- [7]. K. A. Farry and I. D. Walker, "Myoelectric teleoperation of a complex robotic hand," in *Proceedings of IEEE International Conference Robotics and Automation*, vol. 3, 1993, pp. 502–509.

- [8]. H. Hashimoto, H. Ogawa, T. Umeda, M. Obama, and K. Tatsuno, "An unilateral master-slave hand system with a force-controlled slave hand," in Proceedings of IEEE International Conference Robotics and Automation, 1995, pp. 956–961.
- [9]. Emeagwali I., Marayong P., Abbott J. J., Okamura A. M., "Performance analysis of steady-hand teleoperation versus cooperative manipulation", HAPTICS '04 Proceedings, 12th International Symposium on Haptic Interfaces for Virtual Environment and Teleoperator Systems, 2004, pp. 316- 322, March 2004
- [10]. Paul Michelman , Peter Allen, "Shared Autonomy in a Robot Hand Teleoperation System", Proceedings of the 1994 Conference On Intelligent Robotics Systems, pp. 253—259, 1994
- [11]. Haiying Hu, Jiawei Li, Zongwu Xie, Bin Wang, Hong Liu, Hirzinger G., "A robot arm/hand teleoperation system with telepresence and shared control" Proceedings 2005 IEEE/ASME International Conference on Advanced Intelligent Mechatronics, pp.1312-1317, July 2005
- [12]. Heinrich Arnold Ernst, MH-1 A Computer- Operated Mechanical Hand, D.Sc. Thesis 1961.
- [13]. Shigeo Hirose, Yoji Umetani, The development of soft gripper for the versatile robot hand, Mechanism and Machine Theory, Volume 13, Issue 3, 1978, Pages 351-359
- [14]. M. T. Mason and J. K. Salisbury, Robot Hands and the Mechanics of Manipulation, Cambridge, MA, M.I.T. Press, 1985



- [15]. T. Okada, "Object handling system for manual industry," IEEE Transactions on Systems, Man and Cybernetics, vol. SMC-9, no. 2, 1979.
- [16]. S. C. Jacobsen, J. E. Wood, D. F. Knutti, and K. B. Biggers, "The Utah-MIT dexterous hand: Work in progress," The International Journal of Robotics Research, vol. 3, no. 4, pp. 21–50, 1984.
- [17]. Hashimoto H., Ogawa H., Obama M., Umeda T., Tatuno K., Furukawa T., "Development of a multi-fingered robot hand with fingertip tactile sensors," Proceedings of the 1993 IEEE/RSJ International Conference on Intelligent Robots and Systems '93, IROS '93., vol.2, pp.875-882 26-30 Jul 1993.
- [18]. Li-Ren Lin, Han-Pang Huang, "Mechanism design of a new multifingered robot hand," Proceedings of IEEE International Conference on Robotics and Automation, 1996, vol.2, no., pp.1471-1476 vol.2, 22-28 Apr 1996
- [19]. Caffaz, A., Cannata, G. , "The design and development of the DIST-Hand dextrous gripper," Proceedings. 1998 IEEE International Conference on Robotics and Automation, 1998., vol.3, pp.2075-2080, 16-20 May 1998
- [20]. Casalino G., Caffaz A., Cannata G., Panin G., Messucco E., "The DIST hand, an anthropomorphic, fully sensorized, dexterous gripper", IEEE Workshop Humanoids 2000, Boston, pp. 588-604, 2000.
- [21]. Lovchik C. S., Diftler M. A., "The Robonaut hand: a dexterous robot hand for space," Proceedings. 1999 IEEE International Conference on Robotics and Automation, 1999, vol.2, pp.907-912, 1999
- [22]. Sugiuchi H., Watanabe S., Hasegawa Y., Nornoto M., "A control system for multi-fingered robotic hand with distributed touch sensor," Industrial



PT TAUHIM
PERPUSTAKAAN TUNJUNGINAH

Electronics Society, 2000. IECON 2000. 26th Annual Conference of the IEEE, vol.1, pp.434-439, 2000

- [23]. Butterfass J., Grebenstein M., Liu H., Hirzinger G., "DLR-Hand II: next generation of a dextrous robot hand" Proceedings 2001 IEEE International Conference on Robotics and Automation, ICRA 2001, vol.1, pp. 109- 114, 2001
- [24]. Erico Guizzo, "Building a Super Robust Robot Hand", IEEE Spectrum's robotics blog, January 25, 2011 Casalino G., Giorgi F., Turetta A., Caffaz A., "Embedded FPGA-based control of a multifingered robotic hand" Proceedings ICRA '03. IEEE International Conference on Robotics and Automation, 2003, vol.2, pp. 2786- 2791, 2003
- [25]. Namiki A., Imai Y., Ishikawa M., Kaneko M., "Development of a high-speed multi-fingered hand system and its application to catching", Proceedings. 2003 IEEE/RSJ International Conference on Intelligent Robots and Systems, 2003. (IROS 2003), vol.3, pp. 2666- 2671, 2003
- [26]. Xuan-Thu Le, Wn-Goo Kim, Byong-Chang Kim, Sung-Hyun Han, Jong-Guk Ann, Young-Ho Ha, "Design of a Flexible Multifingered Robotics Hand with 12 D. O. F and Its Control Applications," SICE-ICASE, 2006. International Joint Conference on Control, Automation and Systems, pp.3461-3465, 2006
- [27]. Xuan-Thu Le, Se-Bong Oh, Dong-Won Ha, Won-Il Kim, Sung-Hyun Han, "A Study On Robust Control Of Multifingered Robot Hand With 16 D.O.F," ICCAS '07. International Conference on Control, Automation and Systems, 2007, pp.62-65, Oct. 2007.



PTIA UTHM
PERPUSTAKAAN TUNJUKU TUN AMINAH

- [28]. L.Q. Tan, S.Q. Xie, I.C. Lin, T. Lin, "Development of a Multifingered Robotic Hand", ICIA '09. International Conference on Information and Automation, 2009, pp.1541-1545, June 2009
- [29]. Takeuchi Hiroki, Watanabe Tetsuyou, "Development of a Multi-fingered Robot Hand with Softness-changeable Skin Mechanism," 2010 41st International Symposium on Robotics (ISR), and 2010 6th German Conference on Robotics (ROBOTIK) , pp.1-7, June 2010
- [30]. Chalon Maxime, Wedler Armin, Baumann Andreas, Bertleff Wieland, Beyer Alexander, Butterfass Joerg, Grebenstein Markus, Gruber Robin, Hacker Franz, Kraemer Erich, Landzettel Klaus, Maier Maximilian, Sedlmayr Hans-Juergen, Seitz Nikolaus, Wappler Fabian, Willberg Bertram, Wimboeck Thomas, Hirzinger Gerd, Didot Frederic, "Dexhand: A Space qualified multi-fingered robotic hand", 2011 IEEE International Conference on Robotics and Automation (ICRA), pp.2204-2210, May 2011
- [31]. Shadow Dexterous Hand C6M, Technical Specification, Current Release August 2009. <http://www.shadowrobot.com/hand/techspec.shtml>
- [32]. Frank Daerden and Dirk Lefeber, " Pneumatic Artificial Muscles: Actuators For Robotics And Automation," European journal of Mechanical and Environmental Engineering, vol.47, pp.10-21, 2000.
- [33]. J. Denavit and R.S. Hartenberg, 1955, "A kinematic notation for lower-pair mechanisms based on matrices." Trans ASME J. Appl. Mech, 23:215–221.
- [34]. Hartenberg, R. S., and J. Denavit. "Kinematic Synthesis of Linkages" New York: McGraw-Hill, 1964.



PT TAAUTAHM
PERPUSTAKAAN FUNKU TUN AMINAH

- [35]. Dirman Hanafi, Amran Mohd Zaid, Ignatius Agung Wibowo, Mohd Najib Ribuan, Mohd Fauzi Zakaria, Sumaiya Mashori, Mohd Rizal Arshad, "Development of Multi-Finger Robot Hand Model for Dynamic Analysis", 2010 International conference on Manufacturing and Engineering Systems.
- [36]. Mathew H. M. Lee, Alex Moroz, "Normal Values for Range of Motion of Joints", The Merck Manual Online, Merck Sharp & Dohme Corp., a subsidiary of Merck & Co., Inc., Whitehouse Station, N.J., U.S.A., February 2009.
- [37]. Yuichi Kurita, Yasuhiro Ono, Atsutoshi Ikeda, Tsukasa Ogasawara, "Human-sized anthropomorphic robot hand with detachable mechanism at the wrist", Mechanism and Machine Theory, Volume 46, Issue 1, January 2011
- [38]. Seunghoon Shin, Sangchul Han, Kunwook Lee, Hyungpil Moon, Hyouk Ryeol Choi, Ja Choon Koo, "A design framework for dexterous robotic hand", 2011 8th International Conference on Ubiquitous Robots and Ambient Intelligence (URAI), Incheon, Korea, November 2011
- [39]. Shinji Matsubara, Shingo Okamoto and Jae Hoon Lee, "Prosthetic Hand Using Shape Memory Alloy Type Artificial Muscle", International Multi Conference of Engineers and Computer Scientists, Hong Kong, March 2012.
- [40]. Nozaki, Takahiro, Yusuke Suzuki, and Kouhei Ohnishi. "Transmission of Force Sensations by Hand of Multi-DOF Master-Slave Robot Using Tendon-Driven Mechanism." Ieee Transactions On Industry Applications (2011)
- [41]. Akihiro Yamaguchi, Kenjiro Takemura, Shinichi Yokota, Kazuya Edamura, "A robot hand using electro-conjugate fluid", Sensors and Actuators A: Physical, Volume 170, Issues 1–2, November 2011.
- [42]. Makoto Honda, Takanori Miyoshi, Takashi Imamura, Masayuki Okabe, Faisal M. Yazadi, and Kazuhiko Terashima. "Tele-operation between USA



and Japan using humanoid robot hand/arm". Proceedings of the 6th international conference on Human-robot interaction (HRI '11), 2011, ACM, New York, USA.

- [43]. Dongmok Kim, Jongwon Kim, Kyouhee Lee, Cheolgyu Park, Jinsuk Song, Deuksoo Kang, "Excavator tele-operation system using a human arm", *Automation in Construction*, Volume 18, Issue 2, March 2009.
- [44]. Lewis B., Sukthankar G., "Two hands are better than one: Assisting users with multi-robot manipulation tasks", *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2011, pp.2590-2595, Sept. 2011.
- [45]. Raymond A. Serway (1986). *Physics for Scientists and Engineers*, second ed. Saunders College Publishing. p. 202.



PTTA UTHM
PERPUSTAKAAN TUNKU TUN AMINAH