

WIRELESS CONTROL QUADCOPTER WITH STEREO CAMERA AND  
SELF-BALANCING SYSTEM

MONGKHUN QETKEAW A/L VECHIAN

A project report submitted in partial  
Fulfillment of the requirement for the award of the  
Degree of Master of Electrical Engineering

Faculty of Electrical and Electronics Engineering  
Universiti Tun Hussein Onn Malaysia

JULY 2012

## ABSTRACT

This research focused on develops a remotely operated Quadcopter system. The Quadcopter is controlled through graphical user interface (GUI). Communication between GUI and Quadcopter is done by using wireless communication system. The Quadcopter balancing condition is sensed by FY90 controller and IMU 5DOF sensor. For smooth landing, Quadcopter is equipped with ultrasonic sensor. All signals from sensors are processed by Arduino Uno microcontroller board. Output from Arduino Uno microcontroller board used to control Quadcopter propellers. GUI is designed using Visual Basic 2008 Express as interface between control base and Quadcopter. The experiment shows that Quadcopter can hover with maintain it balancing and stability. Quadcopter can accept load disturbance up to 250g during it hover condition. Maximum operated time of Quadcopter is six minutes using 2200mAh Lipo battery and operate time can be increase by using largest battery capacity.



PT. PUSTAKA TUUKU TUNJANGMINAH  
PERPUSTAKAAN TUUKU TUNJANGMINAH

## ABSTRAK

Penyelidikan ini memberi tumpuan membangunkan sistem Quadcopter yang dikendalikan secara jarak jauh. *Graphical user interface (GUI)* digunakan untuk mengawal *Quadcopter*. Komunikasi antara GUI dan Quadcopter menggunakan alat komunikasi tanpa wayar yang dikenali sebagai *Xbee*. Pengimbangan Quadcopter dikawal oleh *FY90* dan *IMU 5DOF*. *Quadcopter* dilengkapi dengan sensor *ultrasonic* bagi tujuan pendaratan. Semua isyarat daripada sensor diproses oleh mikropengawal *Arduino Uno*. Output dari mikropengawal *Arduino Uno* digunakan untuk mengawal pergerakan *Quadcopter*. GUI direka dengan menggunakan perisian Visual Basic 2008 berfungsi berinteraksi dengan XBee untuk tujuan komunikasi antara komputer dan *Quadcopter*. Eksperimen menunjukkan bahawa *Quadcopter* boleh berfungsi dengan mengekalkan keseimbangan dan kestabilan. *Quadcopter* boleh menerima beban sehingga 250g. Masa operasi maksimum *Quadcopter* ialah selama enam minit dengan menggunakan bateri berkuasa 2200mAh Lipo dan masa operasinya masih dapat ditingkatkan dengan menggunakan batteri yang kuasa lebih tinggi.



## CONTENTS

<b>TITLE</b>	<b>i</b>
<b>DECLARATION</b>	<b>ii</b>
<b>ABSTRACT</b>	<b>iii</b>
<b>CONTENTS</b>	<b>v</b>
<b>LIST OF TABLES</b>	<b>viii</b>
<b>LIST OF FIGURES</b>	<b>ix</b>
<b>CHAPTER 1 PROJECT INTRODUCTION</b>	<b>1</b>
1.1 Introduction	1
1.2 Problem statements	2
1.3 Project objectives	2
1.4 Project scopes / constrains	2
1.5 Report outline	3
<b>CHAPTER 2 LITERATURE REVIEW</b>	<b>4</b>
2.1 Introduction	4
2.2 Technology development	4
<b>CHAPTER 3 METHODOLOGY</b>	<b>9</b>
3.1 Introduction	9
3.2 Flow chart	9
3.3 Quadcopter movement	11

3.3.1	Take-off and landing motion	12
3.3.2	Forward and backward motion	14
3.3.3	Left and right motion	15
3.3.4	Hovering or static position	16
3.4	Quadcopter mathematical modeling	16
3.5	Component requirement	19
3.6	Schematic diagram and PCB layout	20
3.7	Quadcopter body design	26
3.7.1	Frame work	26
3.7.2	Mass properties of design Quadcopter frame	28
3.8	Quadcopter graphical user interface (GUI)	29
3.8.1	GUI comport setting	30
3.8.2	Throttle control GUI	31
3.8.3	Elevator control GUI	31
3.8.4	Aileron control GUI	32
3.8.5	Rudder control GUI	33
3.9	XBee wireless radio communication	34
3.9.1	XBee module interface with Arduino Uno	35
3.9.2	Setting source and destination address of XBee	36
3.10	FY90Q Quadcopter controller	39
3.11	Closed loop control FY90Q throttle input for Quadcopter altitude	40
3.12	Quadcopter built in wireless camera	40

<b>CHAPTER 4 RESULT AND ANALYSIS</b>	<b>42</b>
4.1 Introduction	42
4.2 Weight analysis of Quadcopter	42
4.3 Arduino Uno pulse position modulation (PPM) signal generate	45
4.4 Electronics speed control (ESC) PPM minimum and maximum point calibration	48
4.5 Quadcopter hover ability	49
4.6 Quadcopter power consumption	52
4.6.1 Test of Quadcopter operated time for different throttle range	53
4.7 Quadcopter pitch and roll axis disturbance test	54
4.7.1 Quadcopter roll axis disturbance test result and analysis	56
4.7.2 Quadcopter pitch axis disturbance test result and Analysis	60
4.7.3 Summarize of roll and pitch load disturbance test	64
4.8 Quadcopter wireless camera analysis	64
<b>CHAPTER 5 CONCLUSION</b>	<b>66</b>
5.1 Conclusion	66
5.2 Recommendation for further development	66
<b>REFERENCES</b>	<b>67</b>

**LIST OF TABLES**

2.1	Summarize and comparison of Quadcopter previous work	8
3.1	Component and Arduino Uno pin assign	23
3.2	XBee address setting parameter	37
4.1	Quadcopter major parts weight	44
4.2	Battery specification	52
4.3	Testing result of throttle range versus operate time	53
4.4	Disturbance test parameter	56
4.5	Summarize of result for roll and pitch load disturbance test	64



PTTA UTHAM  
PERPUSTAKAAN TUNKU TUN AMINAH

**LIST OF FIGURES**

2.1	Result of 3-DOF attitude control	4
2.2	Altitude control of Quadcopter	5
2.3	System structure	6
2.4	Control diagram using Fuzzy controller	6
2.5	Simulink model of PID controller	7
2.6	Test result of the Flying Experiment	7
3.1	Flow chart of Quadcopter design	10
3.2	Pitch direction of Quadcopter	11
3.3	Roll direction of Quadcopter	11
3.4	Yaw direction of Quadcopter	12
3.5	Take-off motion	13
3.6	Landing motion	13
3.7	Forward motion	14
3.8	Backward motion	14
3.9	Right motion	15
3.10	Left motion	15
3.11	Schematic of Quadcopter	16
3.12	Angle movement of Quadcopter	18
3.13	Major parts of Quadcopter	20



3.14	Flow chart of circuit board design	21
3.15	Schematic of Arduino Uno pin attach by ISIS	22
3.16	Schematic of brushless motor pin and led pin attach by ISIS	22
3.17	Schematic of IMU 5DOF and ping sensor pin attach by ISIS	23
3.18	Schematic of XBee pin attach by ISIS	23
3.19	PCB layout of circuit board using Proteus ARES (Top side)	24
3.20	PCB layout of circuit board using Proteus ARES (Bottom side)	25
3.21	Fabricated PCB with component	25
3.22	Sketch of Quadcopter top plate with dimension in millimeter	26
3.23	Sketch of Quadcopter bottom plate with dimension in millimeter	27
3.24	Sketch of Quadcopter top and bottom plate connected	27
3.25	Sketch of Quadcopter side view	28
3.26	Sketch of Quadcopter frame with top cover	28
3.27	Mass properties report of design frame by Solid Works	29
3.28	Quadcopter graphical user interface (GUI)	30
3.29	Com port setting	30
3.30	Throttle control GUI for attitude movement	31
3.31	Elevator control GUI for forward and backward movement	32
3.32	Aileron control GUI for forward and backward movement	33
3.33	Rudder control GUI for forward and backward movement	34
3.34	XBee series 1 module	35
3.35	XBee Starter Kit	35
3.36	XBee module and Arduino Uno connection	36

3.37	X-CTU software	36
3.38	X-CTU basic command for XBee address setting	37
3.39	XBee module 1 (Control Station) address setting	38
3.40	XBee module 2 (Quadcopter) address setting	38
3.41	FY90Q module	39
3.42	Block Diagram of Complementary Filter	39
3.43	Block diagram of Quadcopter altitude Closed loop control	40
3.44	Wireless camera	40
3.45	Wireless camera receiver	41
4.1	Motor performance at voltage source 11.1V	43
4.2	Weight of Quadcopter by mass properties simulation	44
4.3	Measurement of actual weight of the Quadcopter	45
4.4(a)	Minimum generated PPM signal (500 microseconds)	46
4.4(b)	Minimum generated PPM signal (500 microseconds)	46
4.5(a)	Maximum generated PPM signal (2400 microseconds)	47
4.5(b)	Maximum generated PPM signal (2400 microseconds)	47
4.6	Minimum ESC detected PPM signal (900 microseconds)	48
4.7	Maximum ESC detected PPM signal (2000 microseconds)	49
4.8	Arduino code for hover ability test	50
4.9	Quadcopter hover ability test platform	51
4.10	Quadcopter lifted completely from ground	51
4.11	Brushless motor specification	52
4.12	Graph of the Quadcopter operate time versus throttle range	54

4.13	Matlab code for read real time data from Arduino	55
4.14	Quadcopter roll axis disturbance test platform	55
4.15	Quadcopter pitch axis disturbance test platform	56
4.16	Roll disturbance test response (no disturbance)	57
4.17	Roll disturbance test response (100g disturbance)	58
4.18	Roll disturbance test response (150g disturbance)	58
4.19	Roll disturbance test response (200g disturbance)	59
4.20	Roll disturbance test response (250g disturbance)	59
4.21	Roll disturbance test response (300g disturbance)	60
4.22	Pitch disturbance test response (no disturbance)	61
4.23	Pitch disturbance test response (100g disturbance)	61
4.24	Pitch disturbance test response (150g disturbance)	62
4.25	Pitch disturbance test response (200g disturbance)	62
4.26	Pitch disturbance test response (250g disturbance)	63
4.27	Pitch disturbance test response (300g disturbance)	63
4.28	Video display by obstacle (without obstacle)	65
4.29	Video display by obstacle (with obstacle)	65



## CHAPTER 1

### INTRODUCTION

#### 1.1 Introduction

Research and development of unmanned aerial vehicle (UAV) and micro aerial vehicle (MAV) are getting high encouragement nowadays, since the application of UAV and MAV can apply to variety of area such as rescue mission, military, film making, agriculture and others. In U.S. Coast Guard maritime search and rescue mission, UAV that attached with infrared cameras assist the mission to search the target [1].

Quadcopter or quad rotor aircraft is one of the UAV that are major focuses of active researches in recent years. Compare to terrestrial mobile robot that often possible to limit the model to kinematics, Quadcopter required dynamics in order to account for gravity effect and aerodynamic forces [2]. Quadcopter operated by thrust that produce by four motors that attached to it body. It has four input force and six output states ( $x$ ,  $y$ ,  $z$ ,  $\theta$ ,  $\psi$ ,  $\omega$ ) and it is an under-actuated system, since this enable Quadcopter to carry more load [3].

Quadcopter has advantages over the conventional helicopter where the mechanical design is simpler. Besides that, Quadcopter changes direction by manipulating the individual propeller's speed and does not require cyclic and collective pitch control [4].

## 1.2 Problem statement

The main problem in Quadcopter is the balancing and stability system. Most of Quadcopter will be unbalance and lost stability in case there are disturbance direct on it such as wind. In this research, to solve above problem the full system of Quadcopter is design and construct. Graphical user interface (GUI) is design in this research to make control task of Quadcopter easier.

## 1.3 Project objectives

The objectives of this project are:

- (a) To design Quadcopter that can control wireless base on computer.
- (b) To design graphical user interface to communicate and control Quadcopter.
- (c) To equip Quadcopter with stereo camera to display video.
- (d) To test the performance of designed Quadcopter.

## 1.4 Project scopes / constrains

The scopes include the weather condition, distance and space:

- (a) Quadcopter only can operate in sunny day or dry condition.
- (b) Quadcopter operate distance not more than 100m in eye sight from the wireless receiver.
- (c) Quadcopter is control by Arduino base microcontroller.
- (d) Quadcopter is operated by brushless motor control by electronic speed controller.

## 1.5 Report outline

This report divided into six chapters. The first chapter is research introduction. This chapter will discuss about problem statement, research objective and scope. Chapter two is discuss the previous study of Quadcopter design and technology for controller that has been developed by researches in same field. In chapter three, it is discuss about methodology to design and construct of Quadcopter. Chapter four is discuss about result and analysis for this research. Conclusion and recommendation are discuss in chapter five of this thesis.



PTTA UTHM  
PERPUSTAKAAN TUNKU TUN AMINAH

## CHAPTER 2

### LITERATURE REVIEW

#### 2.1 Introduction

In order to run “Wireless Control Quadcopter with Stereo Camera and Self Balancing System” research, several theoretical and techniques are need review through previous related research report. The review includes the technology development and control method that used in Quadcopter.

#### 2.2 Technology development

Park *et.al.* (2001) studied on the 3-DOF attitude control free-flying vehicle. The characteristic to be heavily coupled with inputs and outputs, and the serious non-linearity appear in the flying vehicle and due to this non-linear control, multi variable control or optimal control for the attitude control of flying Quadcopter. This research result is illustrated in Figure 2.1.

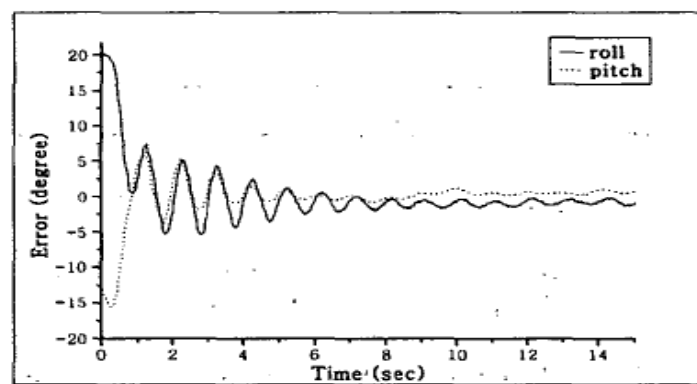


Figure 2.1: Result of 3-DOF attitude control

Ashfaq Ahmad Mian *et.al.*(2007) developed of nonlinear model and nonlinear control strategy for a 6-DOF Quadcopter aerial robot. The nonlinear model of Quadcopter aerial robot is based on Newton-Euler formalism. Model derivation comprises determining equations of motion of the Quadcopter in three dimensions and seeking to approximate actuation forces through modelling of the aerodynamic coefficients and electric motor dynamics. The respective of the applied control is described in Figure 2.2.

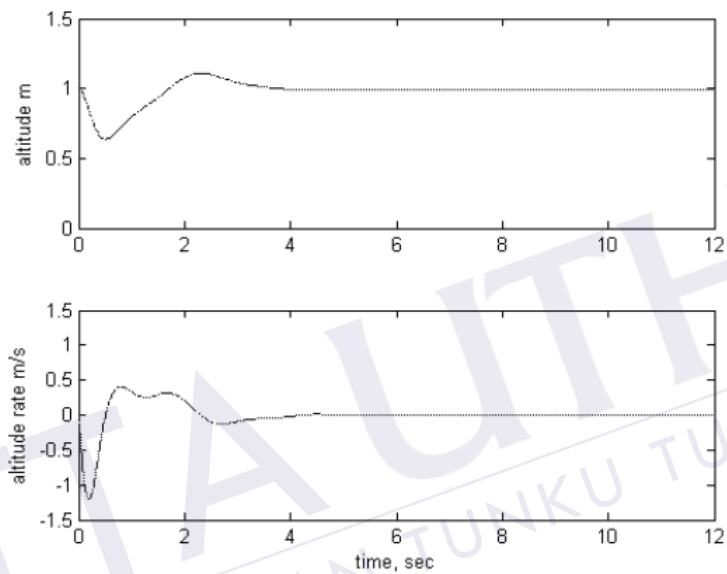


Figure 2.2: Altitude control of Quadcopter

Achtelik *et.al.* (2009) done research on control of Quadcopter by visual tracking using stereo camera. The motion of a Quadcopter is control based on visual feedback and measurement of inertial sensor. In this research, active markers were finely designed to improve visibility under various perspectives. The structure of Quadcopter controller used in this research is shows in Figure 2.3.



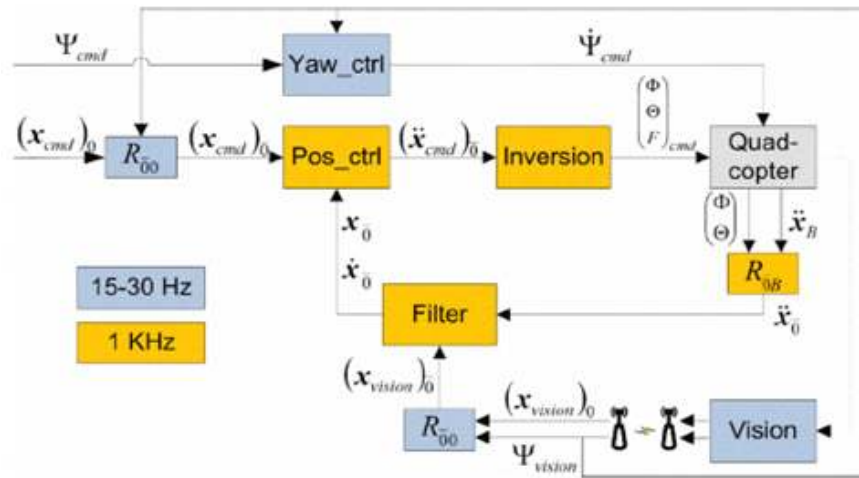


Figure 2.3: System structure

Santos *et.al.* (2010) works on intelligent fuzzy controller of Quadcopter. A fuzzy control is designed and implemented to control a simulation model of the Quadcopter. The inputs are the desired values of the height, roll, pitch and yaw. The outputs are the power of each of the four rotors that is necessary to reach the specifications. Simulation results prove the efficiency of this intelligent control strategy is acceptable. Figure 2.4 represented the fuzzy controller in this research.

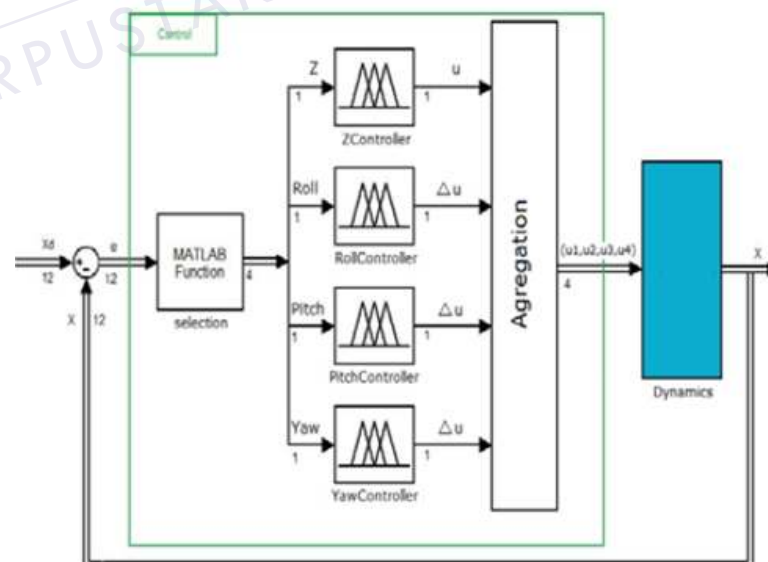


Figure 2.4: Control diagram using Fuzzy controller

Jun Li *et.al.* (2011) is done research to analyze the dynamic characteristics and PID controller performance of a Quadcopter. This paper is describe the architecture of Quadcopter and analyzes the dynamic model on it. Besides that, this paper also designs a controller which aim to regulate the posture (position and orientation) of the 6-DOF Quadcopter. Simulink model of PID controller and flying result done in this research are described in Figure 2.5 and 2.6. Summarizing and comparison of all previous work of Quadcopter are listed in Table 2.1.

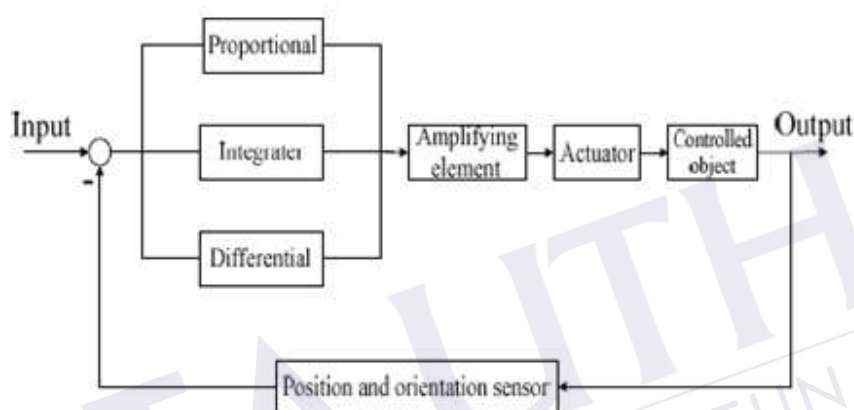


Figure 2.5: Simulink model of PID controller

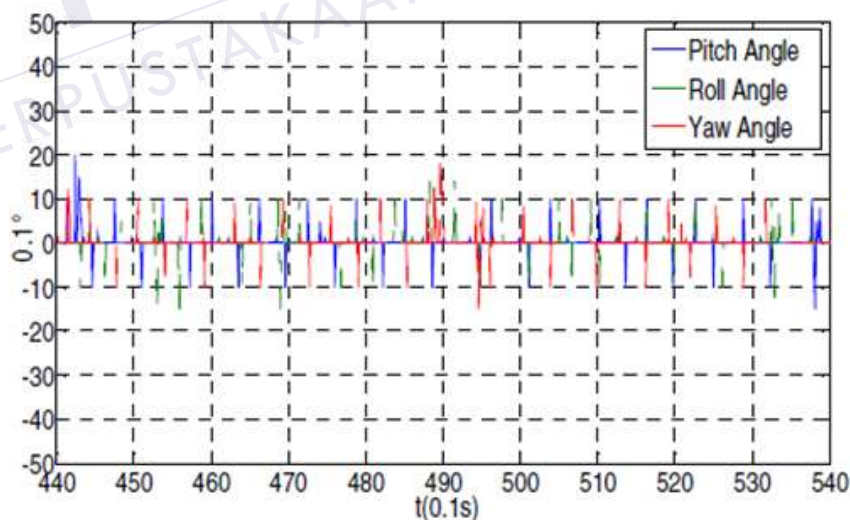


Figure 2.6: Test result of the Flying Experiment

Table 2.1: Summarize and comparison of Quadcopter previous work.

No.	Research Title	Advantages	Disadvantages
1.	3-DOF attitude control free-flying vehicle	Simple and basic of controller design.	Limited degree of freedom (Only 3-DOF applies).
2.	Nonlinear model and nonlinear control strategy for a 6-DOF Quadcopter aerial robot	Compensate the initial error, stabilize roll, pitch and yaw angles and maintain them at zero.	Only design for balancing during hover position of Quadcopter
3.	Control of Quadcopter by visual tracking using stereo camera	The tracking system is highly transportable, easy to set up.	Sensitive to light and not suitable to use at high illumination area
4.	Intelligent fuzzy controller of Quadcopter	Fuzzy controller has fast dynamic response and small overshoot	Controller design is too complex
5.	Analyze the dynamic characteristics and PID controller performance of a Quadcopter	Strong adaptive ability	The system will be unstable if the value of $K_p$ , $K_i$ and $K_d$ is not consistent.

## CHAPTER 3

### METHODOLOGY

#### 3.1 Introduction

This chapter will divide into two phases. The first phase is understanding the Quadcopter structure and its basic mathematical modeling. The last phase is deals with design and construction of the Quadcopter. It will be built by splitting the design into different component whereby each component will be tested to ensure its working properly. This step is to minimize the risk of accidents which will lead to increasing number of component cost.

#### 3.2 Flow chart

Designs of Quadcopter are divided into two stages that is part design in first stage and full interface at second stage. Flow chart of Quadcopter design is described in Figure below:

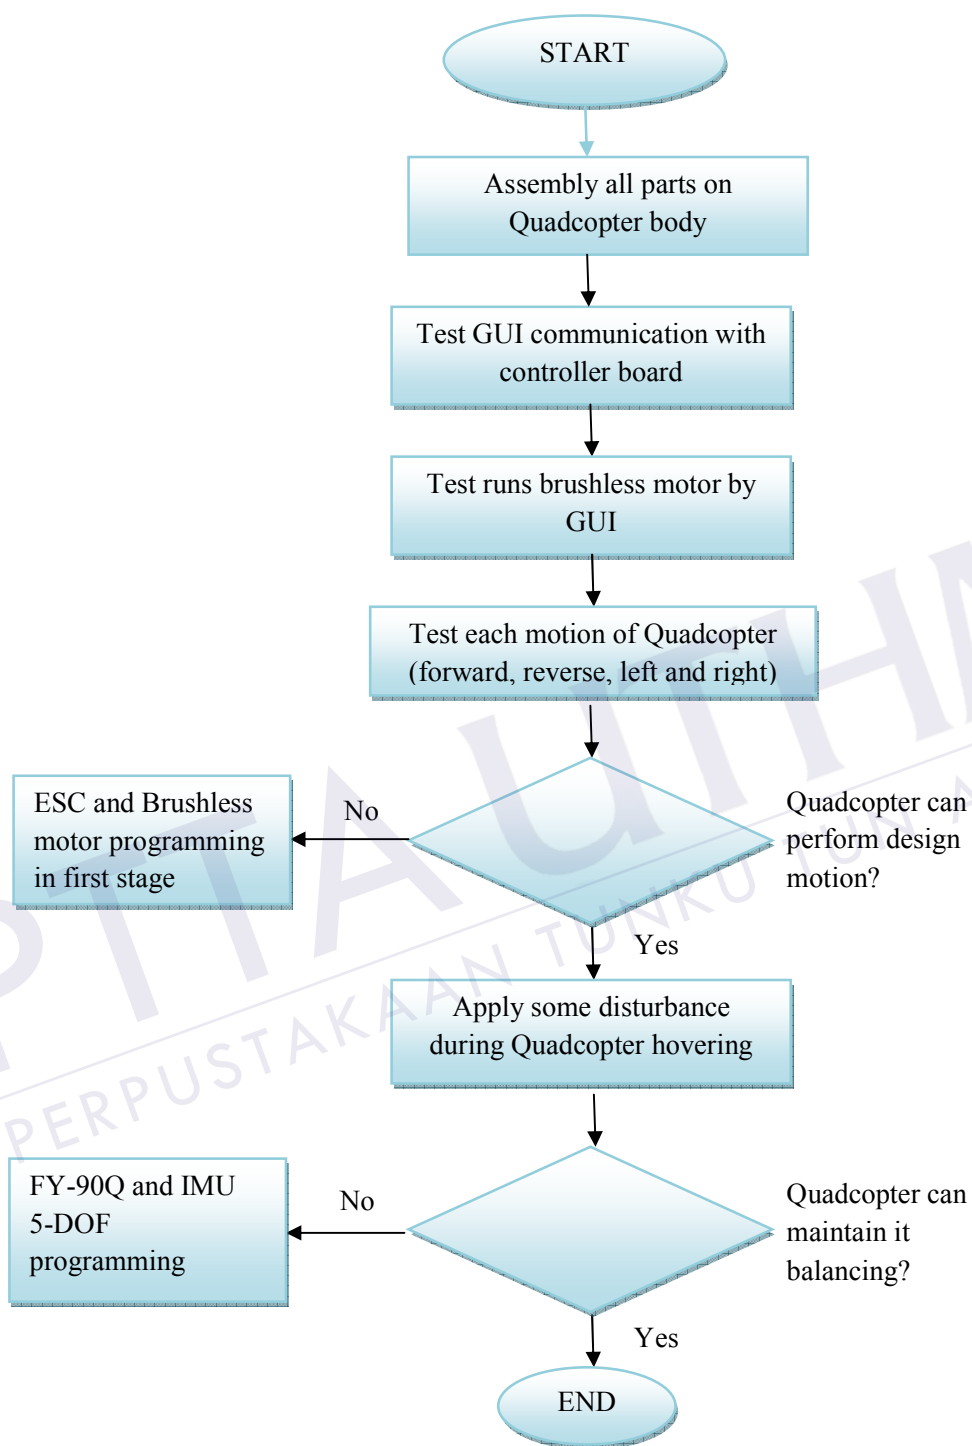


Figure 3.1: Flow chart of Quadcopter design

### 3.3 Quadcopter movement mechanism

Quadcopter can be described as a small vehicle with four propellers attached to a rotor located at the cross frame. This aim for fixed pitch rotors are used to control the vehicle motion. The speeds of these four rotors are independent. By independent, pitch, roll and yaw attitude of the vehicle can be controlled easily. Pitch, roll and yaw attitude of a Quadcopter are shown in Figure 3.2, 3.3 and 3.4.

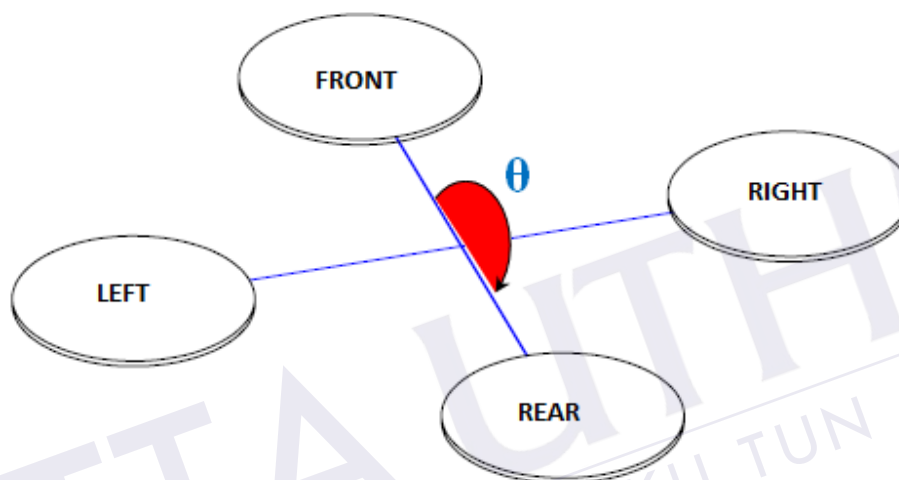


Figure 3.2: Pitch direction of Quadcopter

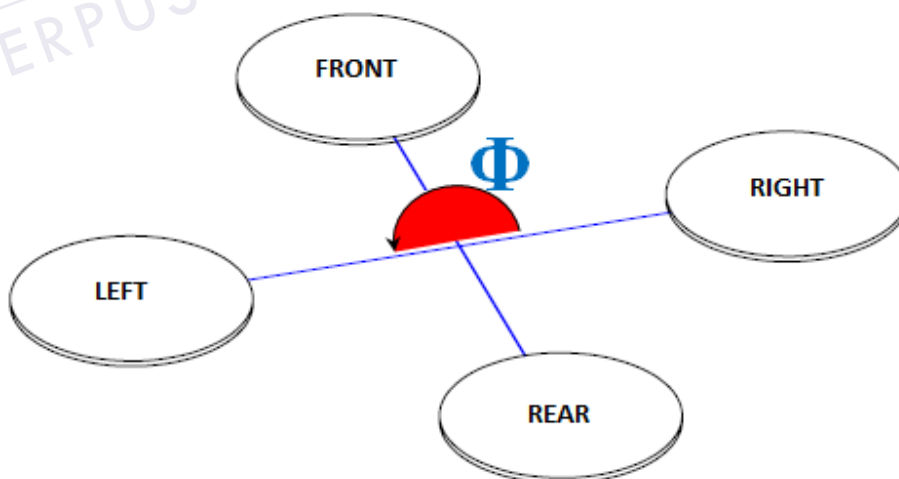


Figure 3.3: Roll direction of Quadcopter

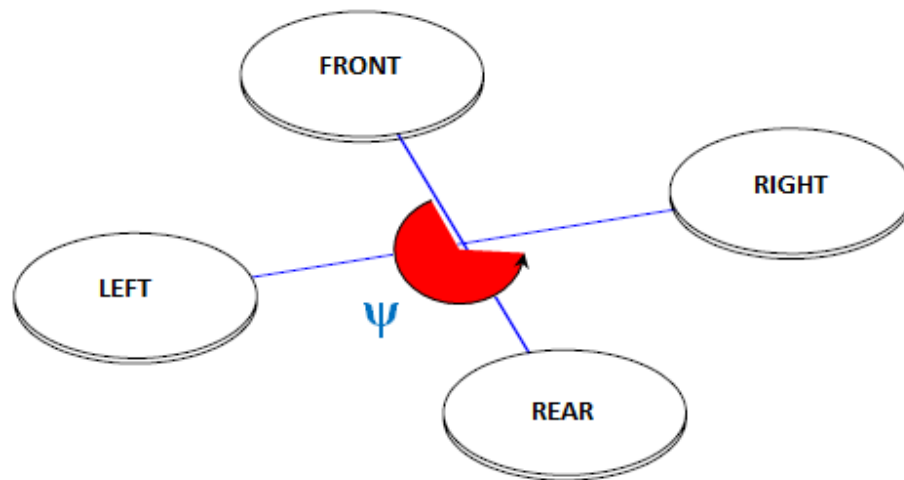


Figure 3.4: Yaw direction of Quadcopter

Quadcopter have four inputs force and basically the thrust that produced by the propeller that connect to the rotor. The motion of Quadcopter can control through fix the thrust that produced. These thrust can control by the speed of each rotor.

### 3.3.1 Take-off and landing motion mechanism

Take-off is movement of Quadcopter that lift up from ground to hover position and landing position is versa of take-off position. Take-off (landing) motion is control by increasing (decreasing) speed of four rotors simultaneously which means changing the vertical motion. Figure 3.5 and 3.6 illustrated the take-off and landing motion of Quadcopter respectively.

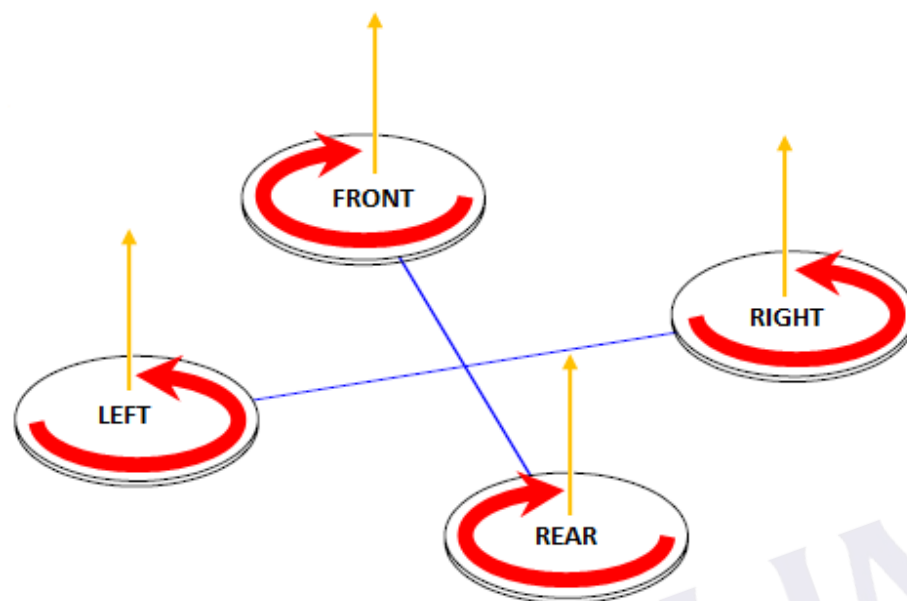


Figure 3.5: Take-off motion

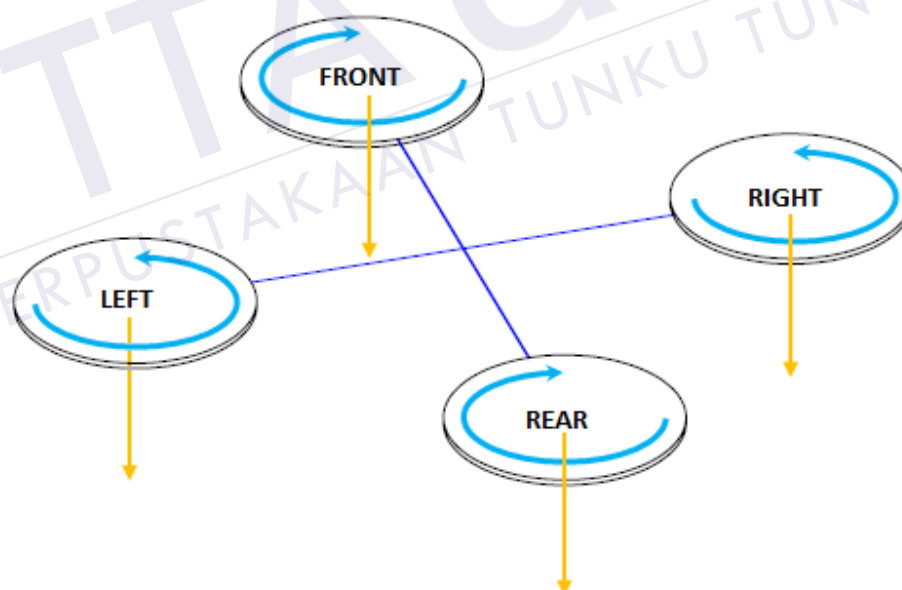


Figure 3.6: Landing motion



## REFERENCES

- [1] Allison Ryan and J. Karl Hedrick (2005). "A mode-switching path planner for UAV- assisted search and rescue." *44<sup>th</sup> IEEE Conference on Decision and Control, and the European Control Conference 2005*.
- [2] Atheer L. Salih, M. Moghavvemil, Haider A. F. Mohamed and Khalaf Sallom Gaeid (2010). "Flight PID controller design for a UAV Quadcopter." *Scientific Research and Essays Vol. 5(23), pp. 3660-3667, 2010*.
- [3] A. Zul Azfar and D. Hazry (2011). "Simple GUI Design for Monitoring of a Remotely Operated Quadcopter Unmanned Aerial Vehicle." *2011 IEEE 7<sup>th</sup> International Colloquium on Signal Processing and its Applications*.
- [4] Kong Wai Weng (2011). "Quadcopter" *Robot Head To Toe Magazine September 2011 Volume 3, pp. 1-3*.
- [5] Duckgee Park, Moon-Soo Park, Suk-Kyo Hong (2001). "A Study on the 3-DOF Attitude Control of Free-Flying Vehicle." *ISIE 2001, Pusan, KOREA*
- [6] Ashfaq Ahmad Mian, Wang Daobo (2007). "Nonlinear Flight Control Strategy for an Underactuated Quadrotor Aerial Robot" *2007 IEEE Journal*
- [7] Markus Achtelik, Tianguang Zhang, Kolja Kuhnlenz and Martin Buss (2009). "Visual Tracking and Control of a Quadcopter Using a Stereo Camera System and Inertial Sensors." *Proceedings of the 2009 IEEE Conference on Mechatronics and Automation*.
- [8] Matilde Santos, Victoria López, Franciso Morata (2010). "Intelligent Fuzzy Controller of a Quadrotor" *2010 IEEE Journal*.
- [9] Jun Li, YunTang Li (2011). "Dynamic Analysis and PID Control for a Quadrotor" *2011 International Conference on Mechatronics and Automation*.

- [10] Frank Hoffman, Niklas Goddemeier, Torsten Bertam (2010). "Attitue estimation and control of Quadcopter" *2010 IEEE/RSJ International Conference on Intelligent Robots and Systems*.

