

VOLTAGE TRACKING OF A DC-DC CUK CONVERTER USING NEURAL NETWORK CONTROL

MOHAMED NOOR AZMAN BIN BIDIN

A project report submitted in partial fulfillment of the requirement for the award of
the Master of Electrical Engineering

Faculty of Electrical and Electronic Engineering
Universiti Tun Hussein Onn Malaysia

JULY, 2012

For my beloved mother, father, wife, sons and daughter



ACKNOWLEDGEMENT

First and foremost, I would like to thank the Almighty God Allah s.w.t for His blessings. guidance and granting me the opportunity to accomplish my master's project successfully.

I am deeply indebted to my enthusiastic supervisor Dr. Wahyu Mulyo Utomo for his guidance, encouragement, prompt feedback, constructive comments, interest in my work and time devoted to our discussions. With such fully of knowledge, experience, patience and dedication, he provided strong direction which led me to the right track to complete this project.

My sincere loves and thanks to my wonderful parents, abah Bidin bin Jaafar and mak Zaleha bt Tahir, for their loves and support throughout my life and education. Sincere loves and thanks also goes to my beloved wife, Shamsuria binti Mohd Ariffin for her invaluable patience, comfort and support when I needed it most. To all my beloved sons, Mohd Uzair, Mohd Umair, Mohd Zubair and my daughter Ummu Aqilah for making my life so enjoyable and meaningful. Without their encouragement and support, it would be quite tough for me to complete this thesis.

Highest appreciation and warmest thanks to all my friends for boosting an extraordinary level of encouragement and assistance while I worked on this project. These unique and affectionate friends have added their valuable contributions, offering feedback and criticism. May Allah bless them all.

Finally, I also wish to thank all postgraduate member, all staff in Faculty of Electrical and Electronic Engineering and Postgraduate Centre for their support, cooperation and contribution all the way. Thank you so much. Universiti Tun Hussein Onn Malaysia (UTHM) is gratefully acknowledged.

ABSTRACT

This paper presents a control scheme of a neural network for a DC-DC Cuk converter. The proposed neural network control (NNC) strategy is designed to produce regulated variable DC output voltage. The mathematical model of Cuk converter and artificial neural network algorithm is derived. Cuk converter has some advantages compared to other type of converters. However the nonlinearity characteristic of the Cuk converter due to the switching technique is difficult to be handled by conventional controller such as proportional-integral-derivative (PID) controller. To overcome this problem, a neural network controller with online learning back propagation algorithm is developed. The NNC designed tracked the converter voltage output and improve the dynamic performance regardless load disturbances and supply variations. The proposed controller effectiveness during dynamic transient response is then analyze and verified using MATLAB-Simulink. Simulation results confirm the excellent performance of the proposed NNC, exhibits better dynamic performance compared to the classical PID controller.

ABSTRAK

Kertas ini membentangkan satu skim kawalan jaringan saraf untuk penukar arus terus (AT-AT) jenis Cuk. Pengawal jaringan saraf yang dicadangkan (NNC) direkabentuk untuk menghasilkan keluaran voltan AT yang teratur. Model matematik bagi penukar Cuk dan algoritma jaringan saraf tiruan (ANN) diterbitkan. Penukar Cuk mempunyai beberapa kelebihan berbanding penukar AT yang lain. Bagaimanapun ciri-ciri ketidaklelurusan penukar Cuk disebabkan oleh teknik pensuisannya amat sukar ditangani oleh pengawal konvensional seperti pengawal jenis pembezaan–kamiran–berkadaran (PID). Untuk mengatasi masalah ini, pengawal jaringan saraf dengan teknik pembelajaran dalam talian berdasarkan algoritma penyebaran belakang dibangunkan. Pengawal jaringan saraf yang dibangunkan akan memperbaiki prestasi dinamik tanpa dipengaruhi oleh perubahan masukan atau gangguan beban. Keberkesanan pengawal yang dibangunkan semasa sambutan transient dinamik dianalisa dan disahkan menggunakan simulasi MATLAB-Simulink. Keputusan simulasi mengesahkan prestasi cemerlang pengawal jaringan saraf yang dibangunkan, mempamerkan prestasi dinamik yang lebih baik berbanding pengawal konvensional PID.

CONTENTS

TITLE	i
DECLARATION	ii
DEDICATION	iii
ACKNOWLEDGEMENT	iv
ABSTRACT	v
CONTENTS	vii
LIST OF TABLES	x
LIST OF FIGURES	xi
LIST OF SYMBOLS AND ABBREVIATIONS	xiii
LIST OF APPENDICES	xv

CHAPTER 1	INTRODUCTION	1
1.1	Project Background	1
1.2	Problem Statement	3
1.3	Project Objectives	4
1.4	Project Scopes	4
1.5	Thesis Organization	5
CHAPTER 2	LITERATURE REVIEW	6
2.1	Controller Development	6
2.2	Cuk converter	8
2.2.1	Cuk converter analysis	9
2.2.1.1	When switch S is 'on', $0 < t < DT$	10
2.2.1.2	When switch S is 'off', $DT < t < T$	12
2.2.2	Cuk waveforms	13
2.3	Operating Modes	15
2.3.1	Discontinuous Conduction Mode (DCM)	15
2.3.2	Continuous Conduction Mode (CCM)	16
2.3.3	Steady State Operation	17
2.3.3.1	Component selection	17
2.4	Artificial Neural Network (ANN)	21
2.4.1	Back Propagation Algorithm	23
CHAPTER 3	METHODOLOGY	25
3.1	Introduction	25
3.2	Mathematical model	26
3.2.1	State space representations	26
3.2.2	Control-to-output transfer function	32
3.3	The proposed neural network controller for voltage tracking of a DC-DC Cuk converter	35

CHAPTER 4	RESULT AND ANALYSIS	41
4.1	Simulation results	41
4.1.1	Uncontrolled Cuk converter	41
4.1.2	Cuk converter controlled by PID controller	46
4.1.3	The proposed NNC controller	47
4.1.4	Voltage tracking of the proposed NNC controller	48
4.1.5	The output voltage transient response to reference voltage changes.	52
CHAPTER 5	CONCLUSION AND FUTURE WORK	54
5.1	Conclusion	54
5.2	Future Works	55
REFERENCES		56
APPENDICES		58



LIST OF TABLES

4.1	Specifications and parameters of cuk converter	43
4.2	Transient response analysis of uncontrolled Cuk converter	45
4.3	Comparison of PID controller and proposed NNC transient performance	52



PTTA UTHM
PERPUSTAKAAN TUNKU TUN AMINAH

LIST OF FIGURES

2.1	Cuk converter circuit	9
2.2	Current in inductor L	10
2.3	Cuk converter equivalent circuit when S is on	10
2.4	Cuk converter equivalent circuit when S is off	12
2.5	Cuk converter waveforms	14
2.6	Inductor current waveform of converter: (a) DCM, (b) CCM	17
2.7	Cuk converter waveforms (a) Capacitor current (b) Capacitor ripple voltage (c) Inductor current	18
2.8	A feed-forward perceptron network with three layers	23
3.1	Block diagram of the proposed NNC of Cuk converter	25
3.2	Cuk converter small signal circuit	26
3.3(a)	Mode 1 - switch S is 'on'	28
3.3(b)	Mode 2 - switch S is 'off'	29
3.4	Flow chart of modelled Cuk converter in CCM	34
3.5	Architecture of the proposed neural network controller	35
3.6	Block diagram of proposed NNC with BPA	38
3.7(a)	The flow chart of back propagation training process	39
3.7(b)	Flow chart of back propagation training process in neural network	40
4.1	Cuk converter simulation diagram	42
4.2	Block diagram of modelled Cuk converter	42
4.3(a)	The output voltage transient response when duty cycle, $D = 0.25$.	43
4.3(b)	The output voltage transient response when duty cycle, $D = 0.4$.	44
4.3(c)	The output voltage transient response when duty cycle, $D = 0.57$	45
4.4	Block diagram of modelled Cuk converter with PID controller	46
4.5	Block diagram of the proposed NNC controller	47
4.6	Block diagram of PID and proposed NNC	48

4.7	The output voltage transient response of the converter starting-up at 4 volt	49
4.8	The output voltage transient response of the converter starting-up at 8 volt	50
4.9	The output voltage transient response of the converter starting-up at 16 volt	51
4.10	The output voltage transient response to reference change from 0-12 volt and to 12-24 volt	52
4.11	The output voltage transient response to reference change from 12 to 24 volt	53



LIST OF SYMBOLS AND ABBREVIATIONS

SYMBOLS

Δ	Small constant value
C	capacitance
D	Duty cycle
D_s	Diode
f	Frequency
f_s	Switching frequency
i_C	Capacitor current
i_D	Diode current
i_L	Inductor current
k_p, k_I, k_d	Proportional gain and integral gain of PID controller
L	Inductance
Q	Charge
R	Load resistance
S	Controllable switch
T_s	Switching time
u	Control input
v_0	Output voltage
v_C	Capacitor voltage
v_{in}	Input voltage
v_L	Inductor voltage
V_{ref}	Reference voltage
x	State vector
ω	weight

ABBREVIATIONS

ANN	Artificial Neural Network
BPA	Back Propagation Algorithm
CCM	Continuous Conduction Mode
DC	Direct Current
DCM	Discontinuous Conduction Mode
EW	Error Weight
FNN	Feedforward Neural Network
FNNC	Fuzzy-Neural Network Controller
FNSM	Fuzzy-Neural Sliding Mode
HVDC	High Voltage Direct Current
KVL	Kirchoff Voltage Law
NNC	Neural Network Control
PD	Proportional Derivative
PI	Proportional Integral
PID	Proportional Integral Derivative
PWM	Pulse Width Modulation

LIST OF APPENDIX

A	Neural Network Programming
---	----------------------------

58



CHAPTER 1

INTRODUCTION

1.1 Project Background

The role of power conversion is to facilitate the transfer of power from the source to the load by converting voltages and currents from one magnitude and/or frequency to another. This function of power processing is performed through an analog power circuit known as the power converter. A controller is required for the management of this power transfer process. The ultimate aim of the entire conversion process is to have as high efficiency as possible, while achieving as closely as possible the desired conversion and control functions. Reliable and sustainable sources in power electronic are vital to adhere the continuous power supply.

Basic configurations of DC–DC converters, namely, the buck, boost, buck-boost, and Cuk converters. Cuk converters are widely used in many industries such as aerospace, electric trains and modern control in HVDC power supply. Cuk converter has many advantages which exhibit the characteristics of higher efficiency because of low input and output current ripple, minimal radio frequency interference, thus resulting

smaller in size and weight. In fact, by careful adjustment of the inductor values, the ripple in either input or output can be nulled completely.

However, operation of the switching devices causes the Cuk converter inherent the nonlinear characteristics. Nonlinear system requires a controller with higher degree of dynamic response. In linear system model, the Proportional-Integral-Differential (PID) controller parameters are easy to determine and resulting good control performances. PID controllers commonly used in industries because of their simplicity verified by M.Y.Hassan & G. Khotapali (2010).

A study by Rubaai A., I. Burge & Garuba (2008) shows that PID controller is unable to adapt and approach the best performance when applied to nonlinear system. It will suffer from dynamic response, produces overshoot, longer rise time and settling time which in turn will influence the output voltage regulation of the Cuk converter. In order to improve control performance of the Cuk converter, many studies on several intelligence controllers such as fuzzy logic control have been reported in (Rubaai, A. *et al.*, 2008) and Evgueniy Entchev & Libing Yang (2007), neural network controller by (Mahdavi, J. *et al.*, 2005) and hybrid neuro-fuzzy control methods for Cuk converter by K. Mehran, D. Giaouris & B. Zahawi (2010). Furthermore, the implementations of the neural network control (NNC) have been proposed recently in (Utomo, W. *et al.*, 2011).

In addition, the NNC also have been applied for several power sources applications such as solar photovoltaic (PV) modules with voltage tracking properties. A study by M. Vaigundamoorthi & R. Ramesh (2011) shows that Cuk converter resulting in high conversion efficiency at high-frequency operation, improved transient, steady state response without significant increase in voltage and current stresses on switches.

Some researchers have developed learning back propagation scheme to improve the effectiveness of nonlinear system. A study by (Utomo, W. *et al.*, 2011) shows that learning back propagation scheme improves the performance of the NNC by improving the dynamic response and minimizing the steady state error.

In this project, neural network controller (NNC) scheme with back propagation algorithm is proposed for the voltage tracking of a DC-DC Cuk Converter using MATLAB Simulink. The developed NNC reacted as an adaptive controller that has an

ability to learn instantaneously and updated the control parameters based on external disturbance and internal variation of the converter with minimum steady state error, overshoot and rise time of the output voltage.

1.2 Problem Statement

Most of the common DC-DC converters such as Buck, Boost and Buck-Boost converter which is capable to step-up or step-down the output voltage produce higher current ripple. This will influenced and decreased the output voltage regulation and efficiency of the converter. These weaknesses can be overcome by Cuk converter which exhibit low input and low output current ripple. Thus the efficiency of the converter will be increased. These factors will contribute to minimise the radio frequency interference, thus the converter size becomes smaller and lighter (compact).

However the switching technique of the Cuk converter causes the converter system to be nonlinear system. Nonlinear system requires a controller with higher degree of dynamic response. Proportional-Integral-Differential (PID) controllers has an advantages in term of simple structure and low cost. However, PID controllers unable to adapt to the external disturbances and internal variations parameters and suffer from dynamic response of the system. PID controllers will produce higher overshoot, longer rise time and settling time which in turn will decreased the output voltage regulation of the Cuk converter.

Since the Cuk converter is a nonlinear system, the neural network control (NNC) method will be developed to improve the voltage tracking of the converter. The developed NNC has the ability to learn instantaneously and adapt its own controller parameters based on external disturbances and internal variation of the converter. Thus this NNC can overcome the problems stated to obtain the required output voltage with better performances; decreasing overshoot and oscillation, faster rise time, faster settling time and minimised steady state error of the system.

1.3 Project Objectives

The objectives of this project are;

- i. To model and analyse a DC-DC Cuk converter and simulate using MATLAB Simulink.
- ii. To develop voltage tracking of a DC-DC Cuk converter using Neural Network Control (NNC) method.
- iii. To analyze the impact of Neural Network Controller (NNC) on voltage tracking DC-DC Cuk converter performances (reducing over shoot, rise time and steady state error).

1.4 Project Scopes

The scopes of this project is to simulate the proposed method of voltage tracking of non-isolated Cuk converter by using Neural Network Controller (NNC) with MATLAB Simulink software. The proposed NNC architecture with 1-3-1 neurons structure; the input layer consists of input neurons, three neurons at the hidden layer followed by an output layer. Analysis of the converter will be done for continuous current mode (CCM) only. Analysis in this mode of operation use a state-space averaged model of the Cuk converter with small signal analysis. The PID controller will be developed to compare the effectiveness of the proposed controller.

1.5 Thesis Organization

This thesis is organized as follows: Chapter 2 discusses the basic concept of a Cuk converter and describes the development of dynamic modelling. An introduction to concept and design of learning back propagation algorithm of neural network control is also detailed. Mathematical model of the Cuk converter is derived in Chapter 3 and the proposed Neural Network Controller for voltage tracking of a DC-DC Cuk converter is developed. Chapter 4 shows the simulation results of the NNC controller and the dynamical responses. Finally, conclusions are summarized in Chapter 5.



PTTA UTHM
PERPUSTAKAAN TUNKU TUN AMINAH

CHAPTER 2

LITERATURE REVIEW

2.1 Controller Development

Switching control techniques of the nonlinear DC-DC converter has been great issues in power conversion system. Usually, the control problem consists in defining the desired nominal operating conditions and regulating the circuit so that it stays close to the nominal, when the system is subject to external disturbances and internal variations. Modeling errors also can cause its operation to deviate from the nominal value. Many approaches for designing controller for Cuk converter has been deeply studied and conducted to obtain high quality and reliable power conversion system.

In the past decade, basically switching control enlightened towards the applications of Proportional-Integral (PI); enhanced to Proportional-Integral-Derivative (PID) controllers. A study by A.J. Forsyth and S.V. Mollow (1998) shows that these classical control methods are very efficient when the converter model is well-known; the working-point of the load is well defined. If the dynamics of the whole converter is more complex, varying and/or uncertain, advanced control laws have to be introduced.

The controller must keep the DC-DC converter within a certain percentage of the specified nominal operating points in the presence of disturbances and modeling errors.

Unfortunately, PID controller does not always fulfill the above mentioned control specifications, especially when disturbance rejection and transient response time requirements are concerned, due to the highly nonlinear characteristics of the converter. PID will suffer from dynamic transient time response; higher overshoot and longer rise time reported by Loic Michel, I. Cedric Join and Michel Fliess (2010).

A large number of possible intelligence controllers among others, fuzzy logic control, neural network control and hybrid neuro-fuzzy control have been reported in M. Milanovic and D. Gleich (2005). Many types of controllers have been proposed on the previous papers.

By referring to the (K.H. Cheng, *et al.*, 2007), the research focused on an efficient simulation model of Cuk converter by applying the fuzzy-neural sliding mode control (FNSM) as the controller. The simulation model of FNSM developed improved the dynamic characteristics of Cuk converter. The fuzzy logic controller is designed purposely to ensure the converter system is able to reach the steady state condition in a short time. The result obtained from fuzzy logic controller will compared with the PID controller. The result shows that the fuzzy logic controller is better performance compared with PID controller.

Development of Proportional-Derivative and Integral (PD-I) type Fuzzy-Neural Network Controller (FNNC) based on Takagi-Sugeno fuzzy model is proposed for Cuk converter to achieve satisfied performance under steady state and transients conditions presented in (K. Mehran. *et al.*, 2010). The PD-FNNC is activated during transient states and the PI-FNNC is activates in steady state region.

After the pioneering studies done by (Loic Michel, *et al.*, 2010), a great deal of research has been directed at developing techniques for averaged modeling of different classes of switching converters (S.R. Sanders, *et al.*, 2009) and for an automatic generation of the averaged models. The motivation of such studies was the simplest possible selection of continuous models adequate to capture all the main features of the switching converters in term of stability, dynamic characteristics, and effectiveness of the design.

Rapid technologies discover intelligent controls of neural network controllers (NNC) has great capability to adapt by updating its learning process using back propagation and sensitivity adjustment. Therefore it is suitable for nonlinear control system. NNC found to be improving the dynamic characteristic of the converter compared with the conventional method. Voltage tracking of Cuk converter using NNC demonstrates the results in achieving the minimum error between regulated DC output voltage and reference voltage injected to the system. This has been verified in (Utomo, W. *et al.*, 2011). From the simulation results, it shows that when the proposed NNC is trained with back propagation algorithm, the overshoot has been greatly decreased and the Cuk converter output voltage can reach its steady state faster. In the case of load disturbances, the NNC can shorten the settling time compared with ordinary PID control with a better tracking performance.

2.2 Cuk converter

The Cuk converter is a type of step-down/step-up converter based on a switching boost-buck topology. Essentially, the converter is composed of two sections, an input stage and an output stage. The schematic of the Cuk converter is presented in Figure 2.1, where V_{in} is input voltage source, V_o is output voltage, input inductor L_1 , controllable switch S , energy transfer capacitor C_1 , diode D_1 , filter inductor L_2 , filter capacitor C_2 , and load resistance R . An important advantage of this topology is a continuous current at both the input and the output of the converter. Disadvantages of the Cuk converter are a high number of reactive components and high current stresses on the switch, the diode, and the capacitor C_1 .

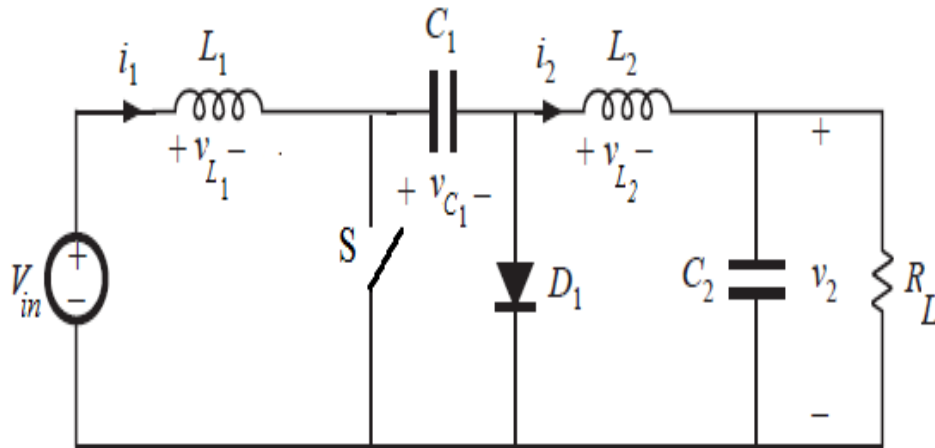


Figure 2.1: Cuk converter circuit

2.2.1 Cuk converter analysis

Analysis for Cuk converter operation using a state-space averaged model developed as described by the inventor, Slobodan M., Cuk, 1977. These analyses involve the use of steady-state and dynamic small signal models of the converter to determine the responses of the converter when operating in the operational continuous current mode (CCM). In the subsequent, parasitic resistances are negligibly small, and all elements are assumed ideal. During the operation, the switch S switches on and off by an externally applied control signal at a switching frequency ' f_s ', and duty ratio ' D ' within the period T . CCM operation implies that inductor currents do not fall to zero at any instant within the period. The operation of the converter within the period T can be divided into two states for CCM operation where duty cycle of the converter is $D = T_{on}/T$ and $D' = 1 - D$.

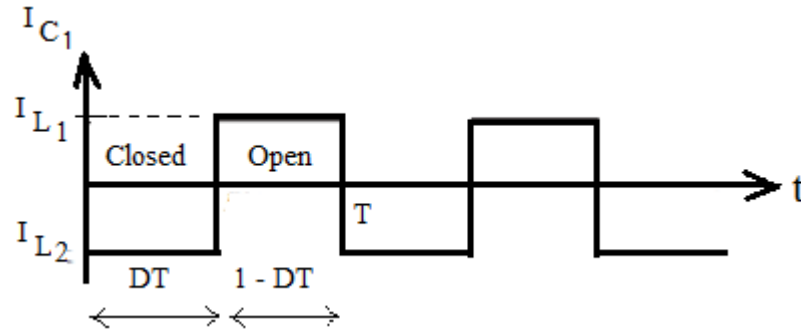


Figure 2.2: Current in inductor L

2.2.1.1 When switch S is 'on', $0 < t < DT$

In the state switch S is on, the converter circuit takes the form shown in Figure 2.3.

There are two separate meshes. In the left hand mesh the input inductor L_1 stores energy from the source over S during the time interval. The energy storage capacitor C_1 is now in the right hand mesh and it transfers stored energy, over S, to the load R, and energy storing elements L_2 and C_2 . Due to the inappropriate voltage polarity of the charge on the capacitor C_1 , diode D_1 is reverse biased and therefore off. The common path between the two meshes is provided by switch S this time.

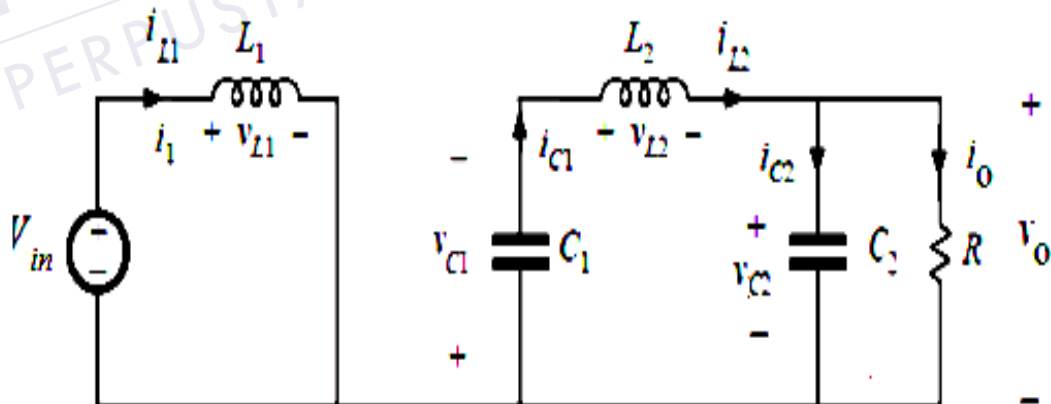


Figure 2.3: Cuk converter equivalent circuit when S is on

REFERENCES

- A.J. Forsyth and S.V. Mollow (1998). Modeling and control of DC-DC converters, IEEE Power Engineering Journal, vol. 12, pp.229-236.
- Loic Michel, I. Cedric Join, Michel Fliess (2010). Model-free control of dc/dc converters. 12th IEEE Workshop on Control and Modeling for Power Electronics (COMPEL).
- Mahdavi J., Nasiri M.R., Agah A and Emadi A, (2005). Application of neural network and State space averaging to DC-DC PWM converters in sliding-mode operation. IEEE Transaction on Mechatronics, vol. 10, no.1. pp.60-67.
- W.M. Utomo, A.A.Bakar, M.Z. Ahmad (2011). Online Learning Neural Network Control of a DC-DC Buck-Boost Converter. 8th International Conference on Information Technology- New Generations, Las Vegas, Nevada, USA.
- W.M. Utomo, Z.A. Haron, A.A.Bakar, M.Z. Ahmad and Taufik (2011). Voltage tracking of a DC-DC Buck-Boost Converter Using Neural Network Control. International Journal of Computer Technology and Electronics Engineering, vol. 1, issue 3.
- Evgeniy Entchev, Libing Yang (2007). Application of adaptive neuro-fuzzy inference system techniques and artificial neural networks performance. Journal of Power Sources 170.
- Rubaai, A., A.R, I. Burge and Garuba (2008). Hardware Implementation of an adaptive network-based fuzzy controller for DC-DC Converters. IEEE Transaction On Industrial Applications, vol. 41, No.6, pp. 1557–1565.
- K. Mehran, D. Giaouris and B. Zahawi (2010). Modeling and stability analysis of closed loop current-mode Cuk converter using takagi-Sugeno fuzzy approach. IEEE Conference on Intelligence Systems and Knowledge Engineering.

- A.Balestrino, A. Landi and L.Sani (2002). Cuk converter global control via fuzzy logic and scaling factors. IEEE Transaction On Industrial Applications, vol. 38, No.2, pp. 406-413.
- M.Y. Hassan and G.Kothapali (2010). Comparison between neural network based PI and PID controllers. 7th International Multi-Conference on systems, Signals and devices.
- M. Vaigundamoorthi & R. Ramesh (2011). ZVS-PWM Active-Clamping Modified Cuk Converter Based MPPT for Solar PV Modules. European Journal of Scientific Research Vol. 58, No.3, pp. 305-315.
- Kuo-Hsiang Cheng, Chun-Fei Hsu, Chih-Min Lin, Tsu-Tian Lee and Chunshien Li (2007). Fuzzy-Neural Sliding-Mode Control for DC-DC Converters Using Asymmetric Gaussian Membership Functions IEEE Transaction on Industrial Electronics, vol. 54, no.3. pp.1528-1536.
- M. Milanovic, and D. Gleich (2005). Buck Converter Digitally Controlled by A Fuzzy State-space Controlled, HAIT Journal of Science and Engineering B., vol. 2, issue 5-6, pp 638-654,
- S.R. Sanders, J.M.Noworolsky, X.Z. Liu and G.C. Verghese (2009). Generalized averaging method for power conversion circuits. IEEE Trans. Power Electron, vol. 6, no.1. pp.251-259.
- Cuk, Slobodan M. (1977). Modeling, Analysis and Design of Switching Converters, Ph.D. Theses, California Institute of Technology, Pasadena, California,.
- Middlebrook R.D., Cuk Slobodan (1976). A General Unified Approach to Modeling Switching Converter Power Stages. IEEE Power Electronics Specialist Conference, pp. 73-86, Cleveland.